Progressive Architecture

Fields of Practice: Design of Retail Stores 49

...In the Office of KETCHUM, GINA & SHARP 50

Specialty Shop, New York, N. Y. 52

Shoe Store, Chicago, Ill. 56

Two Jewelry Stores, Jersey City, N. J., and Stamford, Conn. 60

Men's Clothing Store, Hartford, Conn. 64

Specialty Shop, New York, N. Y. 68

Paired Houses, Los Angeles: GRUYS & McCONVILLE 70

Office, Shop, and Yard, Oakland: FRANCIS J. McCARTHY 73

Aluminum as a Structural Material: PAUL WEIDLINGER 77
Part I

Insulation for Concrete Floor Slabs on Grade 85

Selected Details
- Store: Store Front 93
- Store: Stair Rail 95
- Store: Display Wall 97

NEWSLETTER: 1 VIEWS: 8 PROGRESS REPORT: 14
PRODUCTS: 88 MANUFACTURERS' LITERATURE: 90
REVIEWS: 106 JOBS AND MEN: 124 P.S.: 152

9/48

Mr. Architect –
We want Milcor Steel Access Doors. They last longer, cost less . . .

. . and they're better looking, because they are flush with the wall for painting or papering!

Every home needs at least *one*—public buildings need hundreds!

For key points in plumbing, heating, electrical, and refrigeration systems; for ceiling entries to attics.

Ready to Install — Fits flush with wall or ceiling surface.

No Special Framing — No cutting, adjusting, or altering.

Furnished Painted — Prime coat of aluminum, rust-inhibiting paint.

Concealed Hinges — Or clip fasteners.

Screw-type Lock — Level with surface of lid.

11 Different Sizes — From 8 3/8" x 8 3/8" to 24 3/8" x 36 3/8".

3 Different Styles — With or without expanded metal wings for plastered walls; for non-plastered walls of all kinds.

A job you are proud of— at a big saving for your client

with

Milcor Steel Access Doors

(flush with wall)

You save labor costs and building time with Milcor Steel Access Doors. They help avoid costly construction required by other types of installation. No ugly, old-fashioned frame protrudes from the wall to mar the looks of your job.

Milcor Steel Doors can't crack, shrink, warp, or rot. They last forever. They are installed quickly and easily . . . flush with the wall or ceiling. You can paint or paper right over them.

Specify Milcor Steel Access Doors. Deliver a perfect job. Clients are better satisfied — and stay satisfied.

INLAND STEEL PRODUCTS COMPANY

FORMERLY MILCOR STEEL COMPANY

MILWAUKEE 1, WISCONSIN

Baltimore 24, Md. • Buffalo 11, N. Y. • Chicago 9, Ill. Cincinnati 25, Ohio • Cleveland 14, Ohio • Detroit 2, Mich. • Kansas City 8, Mo. • Los Angeles 23, Calif. New York 22, N. Y. • Rochester 9, N. Y.

Mr. Architect –

Give the best job for the least cost

Tear out coupon and mail today — for complete specifications and data on Milcor Steel Access Doors

INLAND STEEL PRODUCTS COMPANY, 4101 West Burnham Street, Milwaukee 1, Wisconsin

Send me specifications and descriptive material on Milcor Steel Access Doors.

Name..... Title.....

Company.....

Address.....

City..... (.....) State.....

F-315A

Progressive Architecture

(PENCIL POINTS)

September 1948

ITORIAL STAFF

MAS H. CREIGHTON
Editor

RLES MAGRUDER
Managing Editor

RGE A. SANDERSON
Feature Editor

NK G. LOPEZ
Technical Editor

TH LAMAR
E TUPPER
RGOT W. KAMENS
T O'SHAUGHNESSY
Assistant Editors

E HAWLEY Art Director

A LUGINBUHL Assistant

ER BENNETT Drafting

ECUTIVE AND
SINESS STAFF

N G. BELCHER
Publishing Director

NK ARMEIT
Production Manager

N ZELLNER
Circulation Manager

EN A. RAYMOND, JR.
Promotion Manager

ished monthly by REINHOLD LISHING CORPORATION, 330 42nd Street, New York 18, U. S. A. Ralph W. Reinhold, rman of the Board; Philip H. ard, President; H. Burton Executive Vice President Treasurer; Gilbert E. Coch- Vice President and Secretary; cis M. Turner, Vice President; am P. Winsor, Vice President. utive and editorial offices: West 42nd Street, New York N. Y. Subscriptions payable vance: 1 year, $4.00; 2 years, 3 years, $8.00 in U. S. and essions, Canada and Pan erican Union; $2.00 extra for year in all other countries. le copies, $1.00. Printed by s Press, Inc., 508 West 26th New York 1, N. Y. Copyright Reinhold Publishing Corp. e Mark Reg. All rights re- ed. Re-entered as second class er January 22, 1947, at the Office at New York, N. Y., er the Act of March 3, 1879. me XXIX, No. 9, September, Indexed in Art Index.

Newsletter

➡ A taxpayer's action in N. Y., challenging right of the city to use housing funds for school construction, may have wider implications. Citizens' groups are supporting action, pointing out that precedent might be set for diverting to other uses funds voted for public housing, and that needed schools require their own appropriations.

➡ In addition to the N. Y. State housing competition announced elsewhere in this issue, other competition plans are afoot. John A. Shaw, Ethiopian Consul General in N. Y., will send interested architects details of an international competition for an imperial palace for Ethiopia. A national competition limited to younger architects in the U.S. also will soon be announced.

➡ While argument about government aid for housing goes on, the Federal Aid Airport Program is quietly proceeding. By July 15, 389 grants amounting to $45 millions had been made. These range from improvements to small Class 1 airports to building or development of terminal type ports.

Another government-aid program is authorized by the Water Pollution Control Act, which allows loans to states, municipalities or interstate agencies, to 1/3 of estimated cost or to $250,000 per project for preparation of plans and construction of treatment works to prevent discharge of wastes into interstate waters. These programs mean architectural commissions.

➡ Construction activity continues at a rapid pace, despite acceleration in the price spiral. Construction Industry Information Committee reports $7.7 billions of new construction in the first half of '48, a gain of $2 billions over same period in '47. At the same time building costs continue to rise, and building trade hourly wages as well as materials costs still go up, presaging further rises in finished-construction costs.

While bricklayers in N. Y. top the country with a $3.20 rate for hours they work, U.S. Steel leads the news in materials increases, with a $8.09 or 9.6% rise in base prices for major steel products. Other manufacturers also announce rises. Pittsburgh Plate Glass Co. explains up of 9% (10% for window glass) by statement showing net income for first half of '48 of only $14,200,000 against $14,800,000 for similar period last year despite slightly greater dollar volume of business.

➡ International Union of Architects held its first Congress in Lausanne in June. A.I.A. delegates were Ralph Walker and Julian Levi. Elected officers include Sir Patrick Abercrombie (England) as president and Messrs. Baranov (Soviet Union), Walker (U.S.), and Vischer (Switzerland) as vice-presidents.

➡ Greatest paradox of the housing situation is desire on the part of both government and builders to ease credit for private construction and purchasing, balanced against fear by both government and bankers that "sound and realistic values" might be exceeded. As of June almost $33 billions in mortgage debt was outstanding, of which $10 billions are protected by the government through F.H.A. or V.A. insured loans. Even slight dip in the economy will result in distress among those carrying mortgages based on inflated construction costs. Many architects are worried by this, despite continued good business.

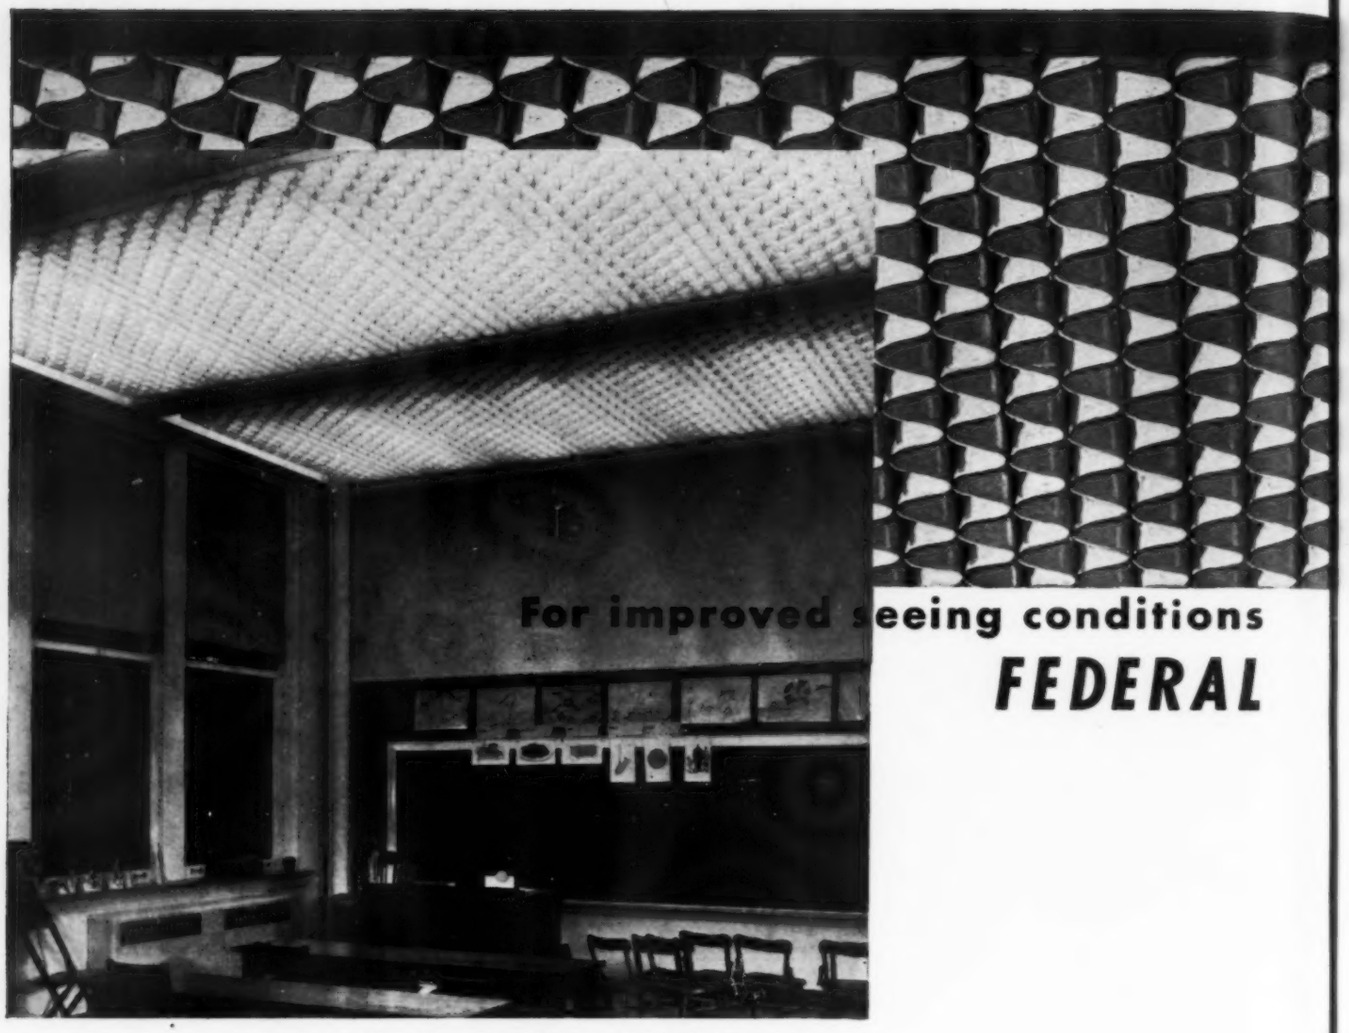

For improved seeing conditions

FEDERAL

School room installation of Cell-Ceil showing even diffusion of light—with elimination of highlights and glare. Cell-Ceil sections match perfectly and permanently.

Cell-Ceil provides the solution for utilization of satisfactorily high levels of illumination without glare. Particularly important in classroom lighting design, this lifting of present limits on lighting levels gives architects and designers a new freedom of approach to lighting problems in a wide variety of applications.

FEDERAL ENTERPRISES,

FORMERLY FEDERAL ELECTRIC COMPANY, INC

8700 SOUTH STATE ST. . . .

MODERN FLOORING TECHNIQUES:

No. 3 in a series of articles on the use of asphalt tile flooring prepared by leading architects and building authorities for the information of the architectural and building professions.

THE TILE-TEX COMPANY, INC.
pioneer maker of asphalt tile.

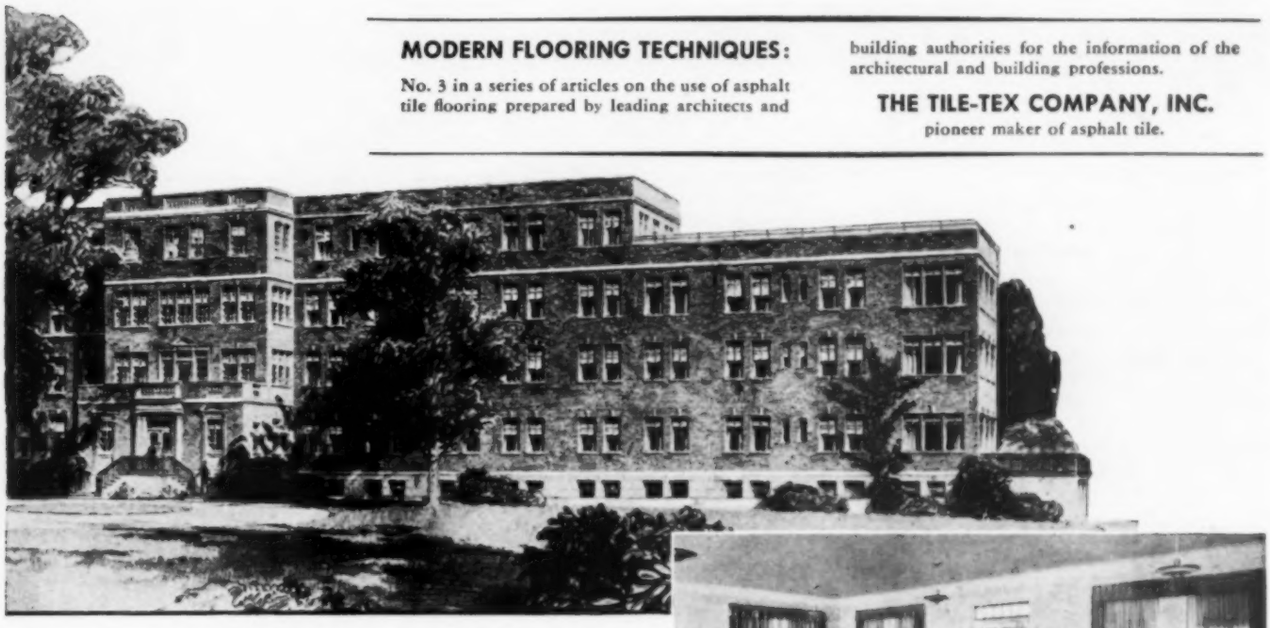

This rendering shows the Glens Falls Hospital, on which Milton T. Crandell was architect. Charles F. Neergaard, hospital consultant.

question of sound transmission between floors became much more important than with the conventional arch construction.

In my hospital work, I have found asphalt tile, properly cushioned, the most satisfactory flooring for general use in most sections of the building, with the exception of service areas. Occasionally a building committee will try to cut the budget by using painted cement in kitchens, pantries and particularly in stair treads and landings, not realizing that they are involving the hospital in a semi-annual expense for repainting, if they are to keep it at all presentable.

Asphalt tile is most practical in corridors, stair halls, and stair landings. Asphaltic underlayment under asphalt tile is particularly recommended here to reduce foot-step noises and add resiliency.

In Cafeterias and Dining Rooms, greaseproof asphalt tile flooring is recommended. Color and design of such a floor should be based on functional requirements and can be laid out to show traffic aisles, table areas, etc., if desired.

In Service Areas, Toilets and Bathrooms, ceramic tile floors are preferred. For kitchen and laundry, quarry tile is particularly recommended.

In Operating and Delivery Suites the improved low cost terrazzo conductive flooring, as developed by the U. S. Public Health Service, is recommended to insure protection against explosion caused by a static spark.

To those of us who spend their lives in and about hospitals the floor is always in sight and always under foot. The less we feel it, the less we hear it, the less we spend to keep it neat and clean—if it is also attractive to look at—the nearer it approaches perfection.

* * * *

Tile-Tex Asphalt Tile floors have been in use in many of America's leading hospitals for over twenty years. It has convincingly demonstrated its ability to perform satisfactorily in hospital areas and has justly earned its reputation as a quality asphalt tile. For more information or reprints of this article, write The Tile-Tex Company, Inc. (subsidiary of The Flintkote Company), Chicago Heights, Illinois. Sales offices in Chicago, New York, Los Angeles, New Orleans, Toronto and Montreal.*

In the finished structure of the Glens Falls project, this lounge shows use of asphalt tile in large areas.

Hall in the Glens Falls structure, using asphalt tile in diamond checkerboard.

Patient's room, below, shows asphalt tile used in restful colors and checkerboard design.

The TILE-TEX Company, Inc.
CHICAGO HEIGHTS, ILLINOIS

*REGISTERED TRADEMARK OF THE TILE-TEX COMPANY, INC.

P Views

CLASSROOM LIGHTING

Dear Editor: "Classroom Lighting Techniques," in August **P/A**, is certainly the most complete and informative article that I have seen on this much-discussed subject.

During the past year we have made a study of natural lighting suitable for elementary classrooms, and we have been unable to find authoritative data on this subject. I am sure that good results have been obtained but, as far as I know, natural lighting has not been reduced to a scientific basis, and it occurs to me that perhaps PROGRESSIVE ARCHITECTURE could do a good deed in going into this subject.

We have just completed the design of an elementary school which, we believe, will not require artificial lighting during the school day, but we do not have engineering data to guarantee this supposition.

SAM'L G. WIENER
Shreveport, La.

Dear Editor: Mr. Weed (Robert Law Weed) and the electrical engineers in this office were very pleased with the article, which we feel is comprehensive, simple, and extremely well presented as a basis for discussion with clients. We have had quite a bit of recent experience with classroom lighting, and most of that is embodied in the article.

We have been very much interested, at the same time, in methods of controlling daylight in classrooms, and methods of compensating by artificial light the loss of outside lighting on cloudy days. We believe a similar article exploring these methods would be of great benefit to those designing schools.

T. TRIP RUSSELL
Robert Law Weed & Associates
Miami, Fla.

AND THE TECHNIQUES

Dear Editor: In general, "Classroom Lighting Techniques," by my friend Carl Allen, of General Electric, seems to be an excellent and thorough job. It is well organized for reference use in an office such as ours.

It is interesting to note that it parallels, in many respects, independent studies which we have undertaken of our own installations. For these studies, we have drawn plan diagrams of various rooms, noted the type, location, etc., of fixtures, and taken foot-candle readings through the room on a grid pattern. This has been supplemented by color photographs, which show visually the light distribution, appearance of the fixtures, and color scheme.

Obviously, no article of this kind can completely exhaust a very complex subject. There are, however, some questions or matters related to it which might be added to the article or considered at a later date.

All the diagrams assume a classroom with a flat ceiling 12′ high. During the last several years particularly, all our efforts have been directed toward designing classrooms with substantially lower ceilings, generally in the neighborhood of 10′ and frequently 9′, with parts as low as 7′6″. This, obviously, poses a totally different lighting problem not answered by the solutions in the article. Many of our schools also have sloped ceilings to accommodate bilateral, clerestory lighting. Again, another problem is presented. While most illuminating engineers shudder at the thought, we believe that most elementary classrooms are used only in daylight hours, and except in very extreme circumstances, such as a tornado or an eclipse of the sun, a substantial amount of light comes in through the windows and needs only to be supplemented by artificial illumination.

We therefore propose for some schools where the budget is limited that this daylight be taken firmly into account and two or even sometimes only one row of fixtures be installed in locations remote from the glass. At night this may mean, along the window wall, a less than desirable level of illumination, but we believe this to be of little consequence when school starts at 9:00 a.m. and is dismissed at 3:30 in the afternoon.

While Carl Allen would probably foam at the mouth at the thought, I believe that consideration should be given to the studies and conclusions of Professor Tinker, of Minnesota, who has reached a number of interesting conclusions on proper lighting intensities. His studies are supported by work done in connection with the lighting at the Harvard Law Library, where the final installation was 20 foot-candles of incandescent lighting. While this latter probably represents a special condition, Tinker's conclusions are based on rather broad studies, and he is sharply of the opinion that high levels recommended by lamp manufacturers are way beyond the point of diminishing returns. Whether he is right or wrong, the controversy seems to me to deserve full attention.

Further studies on lights presumably should include a discussion of fixtures themselves, particularly with reference to material, as they effect maintenance. We, for instance, avoid wherever possible the use of glass or plastic. Former needs constant cleaning, and the latter tends to warp.

These comments are in no sense a criticism of an excellent piece of work, but are intended to suggest possible future lines of study.

PHILIP WILL, JR.
Perkins & Will
Chicago, Ill.

Author's Reply: *Mr. Tugman has shown me a copy of Phil Will's letter to you. It nostalgically reminds me of some of the interesting tablecloth doodling sessions that Phil and his partner Larry and I have had on the subject of school lighting. I certainly agree with Phil that there is much yet to be said on the subject of school lighting, especially regarding the techniques of handling and controlling natural daylight.*

The article does not overlook daylight. For example, in the cost equation, while a typical classroom has a minimum of 1000 hours of use per year, the lights were assumed to be on only about 750 hours of the year. The article also points out that the fixtures near the windows should be switched separately from those in the inner part of the room and that the window row can be moved a foot or so in to take into account the greater prevalence of light close to the windows. At the present time, I am digging through a wealth of material to try to illustrate in simple form the various daylight techniques which have been developed for classroom lighting. As I can see it now, the biggest problem outside that of the variability of daylight is how to deliver sufficient light where you want it without, at the same time, ending up with excessive brightness in the students' field of view.

Regarding Professor Tinker, may I suggest that you keep your eye out for the September issue of Illuminating Engineering, *in which a paper by Professor Tinker is scheduled to appear. This, to my knowledge, is the first time that Professor Tinker will have laid himself open to rebuttal, and I believe that you will find the comments and discussion on Professor Tinker's paper to be the interesting feature of that issue of* Illuminating Engineering.

C. J. ALLEN
Lamp Dept., General Electric Co.
Nela Park, Cleveland, Ohio

NO WORKS OF ART

Dear Editor: Why not show us more of the fine New England and New York architecture being built instead of so

(Continued on page 10)

CABOT'S STAINS

Architect: David J. Abraham

give

Natural Beauty

to any design in any site.....

The rich penetrating colors of Cabot's Creosote Shingle Stains bring out all the natural beauty of wood siding, shingles or clapboards. A selection of 21 attractive colors, clear brilliant hues to weathering grays and browns, enables you to pick exactly the right stain for any design in any setting.

THE BEST WOOD PRESERVATIVE KNOWN

Cabot's Creosote Stains are made with 60% to 90% of pure creosote oil, the best wood preservative known. This creosote oil penetrates deep into the wood, repels termites and insures years of protection from decay.

COLORS THAT REMAIN TRUE

Cabot's Creosote Shingle Stains actually dye the wood displaying grain and texture to its best advantage. And because pure pigments and no fillers or adulterants are used, the colors remain true, even after long exposure to the weather.

Cabot's Weathering Grays and Browns produce in a few months the mellow weatherbeaten effects so typical of old New England houses.

ECONOMY

Cabot's Creosote Stains cost one-third as much as good paint. They are quick and easy to apply . . . do not peel or blister, even on green lumber.

FREE BOOKLET "Stained Houses" contains complete information and illustrations. Write for your copy and color cards today. Samuel Cabot, Inc., 2183 Oliver Bldg., Boston 9, Mass.

Cabot's CREOSOTE SHINGLE STAINS

Architect: Ernest Gunnar Peterson

Samuel Cabot, Inc., 2108 Oliver Bldg., Boston 9, Mass.
Please send me my free copy of "Stained Houses" and color cards.

NAME .....

ADDRESS .....

CITY ..... STATE .....

Views

(Continued from page 8)

much Western, Californian Modern—which is not very attractive, and restful. I think your Kawneer factory building (July 1948 P/A) looks terrible—childish. Let's go back to the good old days when our master architects designed buildings that were beautiful, works of art.

W. Stroll
New York, N. Y.

PLANNING NEEDS ARCHITECTS

Dear Editor: Since my college days at the University of Michigan, when it was the regular habit of the architect, draftsman, or office boy to clip and file the many fine monographs from the pages of old *Pencil Points*, I have been a reader of your magazine. At that time I was enthusiastically studying architecture. Today, after graduate planning study at Harvard, I am employed as the first City Planning Engineer the City of Marquette (c. 16,000 population), Michigan, has had.

During the past few years, particularly since the beginning of the "Postwar Planning" days which began in or about 1943, I have read with considerable misgiving the verbal pot shots which have been fired with increasing velocity between old-line architects and many war-born planners. As a planner I am jumping into the fight, not with the intention of joining sides or mobilizing a third party, but with the desire to clear away some of the debris and to bring in some much needed fresh air.

Some writers have described city planning as architecture which in its highest form strives to reflect our cultural attributes in the third or fourth dimension. Others show planning as a process of untangling and straightening out of social and economic maladjustments caused by the rapid advance of the machine age. Both are commendable aspirations. The former presents the wider perspective with the desire to show the best of our human achievements through city building. The latter would continue to build future environments by rectifying errors resulting from past shortsightedness.

Briefly, one ideal is to attack city planning from an over-all development vantage point and the other to approach the action stage from a piecemeal basis. In actuality, new towns, such as the ones now being created in the overspill areas of London and our war-originated bomber-cities, lend themselves well to complete architectural treatment and unit planning. However, our older cities, suffering from (the planner's coined phrase) hardening of traffic arteries and the like, need replanning which largely falls in the second category. Consequently, both theories are valid and can be properly used.

It is clear then that an architect with a freshly-cut velum can exercise greater imagination in drafting a new series of structures than he can on a remodeling job of an old place with poor framework. The limiting factor in remodeling, of course, is money. If the client can only afford to redo one wing of his house, the remainder will continue to reflect the work of another era. Likewise in city planning, slum clearance and rehousing in new projects changes but one wing of the city. Thus, with new materials and methods flowing faster from factories than tax dollars can be diverted to city rebuilding, we have a resultant maze of styles, sizes, and shapes.

The planner has the tools of zoning, building codes, eminent domain, subdivision ordinances, and architectural control at his disposal. If he knows how to use these tools he can go far toward realizing the two aims mentioned earlier.

These tools are exceedingly important

(Continued on page 12)

A Schlage Installation because...

Schlage is reversible

Mr. Clark didn't foresee changes in the use of his offices, but the architect did. He specified Schlage locks because they can be easily reversed or interchanged to meet changing door usage. This flexibility of Schlage locks is only one of their many economy features.

See Schlage in Sweets Architectural File

SCHLAGE LOCK COMPANY
SAN FRANCISCO NEW YORK

ORIGINATORS OF THE CYLINDRICAL LOCK

DOUBLE DUTY INSULITE

(BILDRITE SHEATHING)

INSULATES

DESIGNED BY
L. MORGAN YOST, Architect
419 Richmond Road
Kenilworth, Ill.

BUILDS

Right at the beginning — in the blueprint stage — is the time to give your clients double for their money by specifying double-duty INSULITE (Bildrite) Sheathing. It *builds* and *insulates* at the same time. It provides greater bracing strength than wood sheathing horizontally applied, plus twice the insulating value. Specify double-duty Insulite.

Refer to Sweet's File, Architectural Section 10a/9

BUILDS AS IT . . .
INSULATES

double-duty
INSULITE
The GENUINE

INSULATES
AS IT BUILDS

"Insulite" is a registered trade mark, U S Pat Off.

INSULITE DIVISION
MINNESOTA & ONTARIO PAPER COMPANY
MINNEAPOLIS 7, MINNESOTA

Views

(Continued from page 10)

to the architect as well, and in each community, no matter how small, it is the responsibility of the architect to help to forge these tools that the future of his community may inherit the fullness of his architectural expression. So often indifference on the part of architects in these matters has resulted in their work being stifled.

Even in Marquette as building codes and zoning ordinances are being discussed at open planning meetings, local architects are too busy under their Dazor lamps working out sketches, for churches and shops for other neighboring communities, to take part in these important discussions of forging city planning tools. Doubtless, this is not an infrequent occurrence throughout America.

Without getting into the hocus-pocus of planning terminology, for which I have no use, I feel that the strongest plea that an architecturally conscious planner can make is to call architects to rise from their midnight jobs and participate in molding a finer community which presents itself from their office windows by engaging in or inaugurating planning action in their own locality that someday that locality will be a true expression of the highest ideals of all its people.

GEORGE N. SKRUBB
City Planning Engineer
Marquette, Mich.

ROTO-WAITER
by Sedgwick

A new kind of fully automatic electric dumb waiter that never overtravels

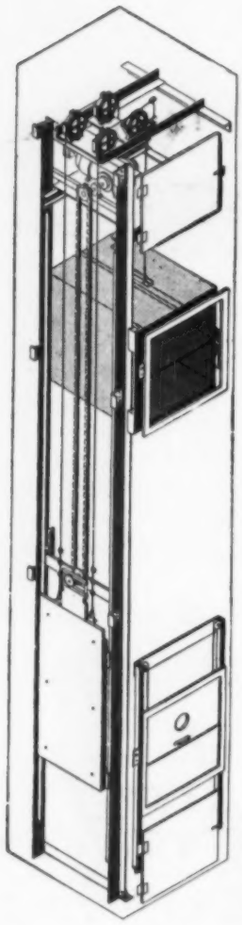

The endless chain drive of the new Sedgwick Roto-Waiter makes it the perfect dumb waiter for stores, hospitals, hotels, restaurants, libraries, clubs, schools, banks, factories, residences, etc.—especially for two-stop installations.

The single direction motor helps cut costs by eliminating the need for special control equipment normally required when reversing motors are used—and, by reducing starting torque, it cuts current consumption.

And Sedgwick Roto-Waiters. . . .

1. Never overtravel
2. Are completely factory-assembled-and-tested
3. Require only minimum clearances
4. Have an overload safety device for safe operation
5. Require no heavy load-bearing supports except at the bottom
6. Are easy to install

The table of dimensions shown below lists three standard *counterweighted* Roto-Waiters. In addition, Sedgwick makes an uncounterweighted Roto-Waiter—capacity 150 lbs., car size 24" x 24" x 36"—which is ideal when a dumb waiter is to be installed in limited space as for undercounter use.

STANDARD ROTO-WAITER DIMENSIONS

Size No.	2C	3C	5C
Capacity, lbs.	200	300	500
Car width, in.	24"	30"	36"
Car depth, in.	24"	30"	36"
Hoistway width, in.	33"	39"	45"
Hoistway depth, clear in.	27"	33"	39"
Hoistway depth, including doors, in.	29"	35"	41"

So if you are stymied by perplexing lifting and lowering problems involving the vertical movement of material and merchandise—*tell us about them.* And write for complete details and specifications of the new electric dumb waiter that *cannot overtravel*—the Sedgwick Roto-Waiter.

SEDGWICK MACHINE WORKS, 142 W. 15th St., New York 11, N. Y.
ELECTRIC AND HAND POWER ELEVATORS AND DUMB WAITERS

PLANNERS' SYMPOSIUM

Dear Editor: In your P. S. on the "hocus-pocus" of planning, in the July edition, you maintained that the chief difference of opinion between the Churchillians and the Adamsites revolved about whether "the planning process is an end in itself" or whether "it must culminate in a creative act." If this is the principal issue, and if Professor Adams of M.I.T. believes that paper plans are the sole outcome of the process, then it is news to me.

So that his position could be more fully presented, I suggest that Professor Adams, like another man in American history, be allowed to speak for himself. Perhaps this could be part of a symposium on the bases, goals, and philosophies of planning, with specific and pointed questions. Since much of the confusion occurs as the result of language, there might be a definition of terms.

I have the feeling that Professors Adams and Greeley and Mr. Weinberg are not poles apart, as you have implied. At least from their lectures, it seems they do agree on the need for balanced, long-range planning carried out by a continuing staff, with the support of an active public. Neither Adams nor Weinberg puts his faith in statistics without inspiring schemes, or vice versa.

I think that you could easily find examples of down-to-earthness in planning practice and literature. At least one of the aims of a large segment of the planning coterie is to convey the values and aims of coordinated development to the people in a popular fashion.

The planner or architect who works in a vacuum without regard for the economic, social, and political elements is tantamount to the chemist experimenting without the progress in allied fields, such as physics, mathematics, etc. Slums are not physical or esthetic problems alone; large-scale redevelopment entails huge economic questions with serious social implications. I could go on, but would rather leave the discussion to the proposed symposium.

SEYMOUR STILLMAN, Assistant Planner
City Planning Commission
Buffalo, N. Y.

In These Modern West Coast Apartments

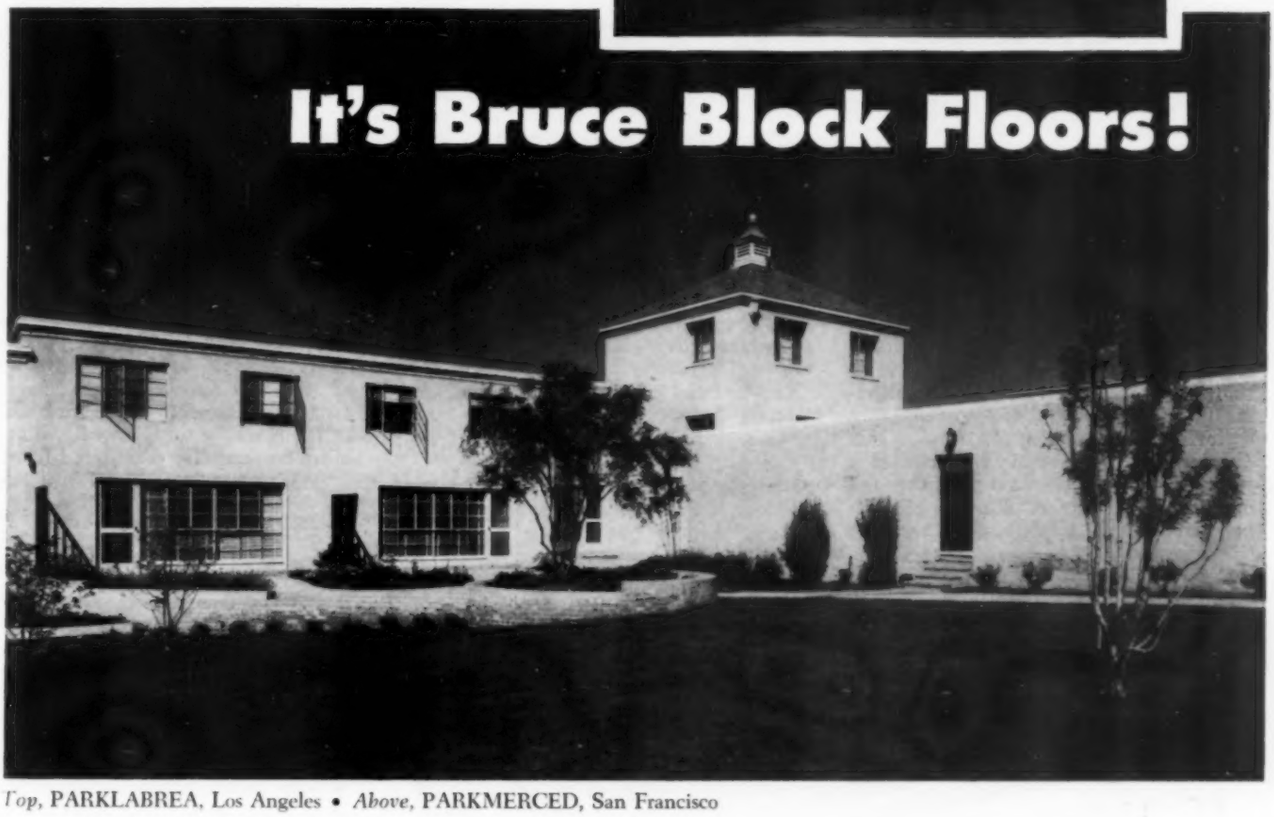

Top, PARKLABREA, Los Angeles • *Above,* PARKMERCED, San Francisco

The ideal floor over concrete
Bruce Block Floors are quickly installed over concrete by laying in mastic—without nails or splines. No clips, screeds or wood subfloor.

■ Designed by Leonard Schultze & Associates and built by Starrett Bros. & Eken, these two modern housing developments of the Metropolitan Life Insurance Co. have brought luxury living at moderate cost to over 3,000 families. They represent community housing at its best.

No feature of these California-style Colonial apartments has been more satisfactory than the floors of Bruce Blocks. Advantages of this flooring are: (1) Easily and economically installed over concrete slab; (2) A permanent part of a building—not a floor to be replaced every few years; (3) Distinctive, modern, beautiful; (4) Comfortable—warm, resilient, quiet underfoot; (5) Easily maintained in perfect condition.

For further information on Bruce Block Floors, see Section 13f in Sweet's Architectural File. Or write E. L. BRUCE CO., MEMPHIS, TENN., World's Largest Maker of Hardwood Floors.

Bruce Block BRUCE

HARDWOOD FLOORS

Prefinished or Unfinished

STORE MODERNIZATION

Despite the impressive total of store construction during the past year, a shortage of retail space in 81 percent of American cities and an appreciable rise in rentals are reported by field researchers of National Association of Real Estate Boards. Since the continued demand for well-located stores makes any drop in prices improbable, the renovation and modernization of existing retail establishments appears feasible to an increasing number of owners and merchants.

This heightened interest was evidenced recently by the attendance of more than 22,000 retailers, distributors, owners, chain store executives, planners, builders, contractors, etc., at the Second Annual STORE MODERNIZATION SHOW in New York. New products, new ideas for store interiors and selling aids were shown in some 75 booths of the manufacturers and suppliers of building materials and equipment. Attention was directed to successful modernization jobs completed in the past year through display of winners of a national competition conducted through Chambers of Commerce, which entered the best work in their towns.

In addition to a display of latest improvements in retail merchandise backgrounds, experts in selling, store design, and display were called in by John W. H. Evans, director of the SHOW, to lead discussions and answer questions at a series of clinics. The topics of these sessions were: "Store Layout and Traffic," "Store Lighting and Color," "Store Displays and Fixturing," "Store Fronts," "Budgeting for Modernization." The clinics were well-attended and beyond discussion of immediate problems of store modernization they touched on trends in retail store design. Chairman of the series of clinics was Charles M. Edwards, Dean of the Graduate School of Retailing, New York University, and Prof. Hans E. Krusa of the School acted as moderator.

Store planning means planning for constant motion. Morris Lapidus, architect, New York, pointed out during the "Store Layout and Traffic" clinic. He explained:

"All too often the plan of the store is worked out as a static thing. There are a number of orbits of motion which must be considered before the final plan is achieved. The first . . . is the movement of merchandise from receiving to marking, to stock rooms, to racks and bins, and finally to the customer . . . or back to wrapping and shipping. The second is the movement of the customer from the time he enters the door until he leaves the store. We must consider . . . his contact with the merchandise, his exposure to displays, relationship of customer to salesman, movement of customer to such spots as credit desks, cashiers, wrapping stations, rest rooms, and other conveniences the store might offer. Another orbit of motion is that of the salespeople, whose movements from the time they come into the store in the morning until they leave at night must be carefully considered in relation to selling and personnel problems."

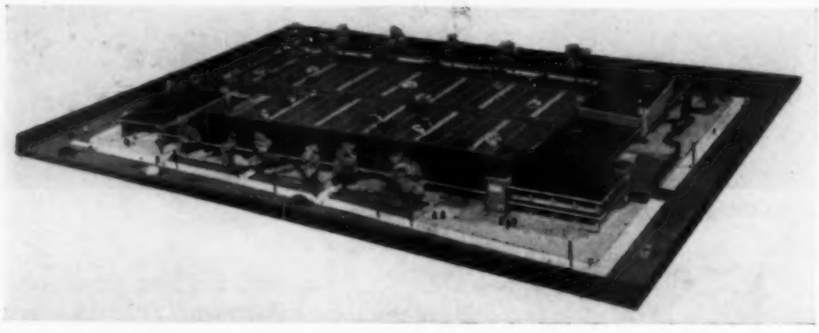

To emphasize planning for the future, a competition for students of architectural schools to design a one-block "Shopping Center of the Future," was conducted in connection with the 1948 Store Modernization Show. First prize, $500, went to E. R. Shackleton, D. G. Crounse, and E. B. Bruce of the senior class at Syracuse University. The team's solution, presented as a scale model, is shown above. Teams from Cooper Union, New York, and University of Illinois won the second and third honors, respectively. They were judged by a jury of store designers, merchants, architectural magazine editors, and educators.

Classify modern lighting as a sales investment rather than as an expense, those attending the "Store Lighting and Color" clinic were advised by Carroll L. O'Shea, illuminating engineer, General Electric Company. Scoffing at those who buy lighting without regard for the function light must perform in their stores, he explained that a lighting system must attract shoppers, must help them to see merchandise quickly and accurately, must create a pleasing atmosphere in the store. He reminded those who expect to modernize their stores:

"Remember the thing you are buying in a lighting installation is the light delivered to the sales or display areas. The fixtures, lamps, wiring, and wattage used are only the means to the end —light of the proper quantity and quality . . . One of the first things to determine is what effect you wish to

(Continued on page 16)

Store modernizations throughout the country were reported at the Show through a competition in which Chambers of Commerce submitted best jobs in their cities and towns. Judged best by a professional jury and awarded a $250 prize was Rifkin & Grannick specialty shop in Trenton, N. J. (before-and-after photos shown at left) by Victor Bohm, architect, New York and Trenton.

LAVISH WITH COMFORT! A MISER WITH FUEL!

EVERY NIGHT
THIS MIRACLE
THERMOSTAT
SAVES FUEL

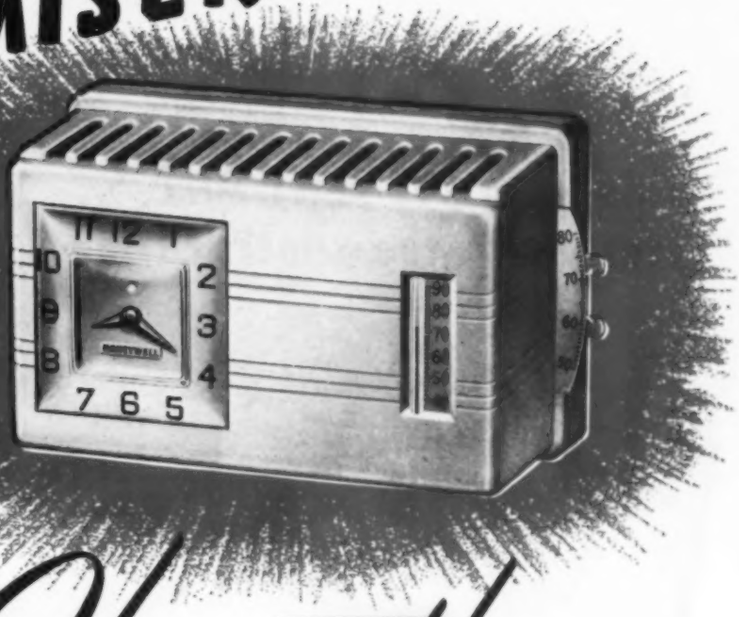

THE NEW Chronotherm

WITH Chronotherm, Honeywell's handsome new electric clock thermostat, owners of your homes can enjoy the most carefree heating comfort they have ever known—and at the same time save fuel! Chronotherm keeps homes at just the right comfort temperature from morning to night. Then, when the family retires, it automatically switches to lower fuel-saving temperature, or in mild climates, shuts off the heat. In the morning, the desired daytime temperature is restored gradually, without overshooting. The result, according to government authorities, is savings of 10 per cent or more of the heating bill—with complete comfort and convenience. Make certain you specify Honeywell's new, nationally advertised Chronotherm in the houses you design. It is another way to provide your clients with the latest in modern improvements. Minneapolis-Honeywell, Minneapolis 8, Minnesota. In Canada: Toronto 17, Ontario.

MINNEAPOLIS
Honeywell
CONTROL SYSTEMS

73 BRANCHES FROM COAST TO COAST WITH SUBSIDIARY COMPANIES IN: TORONTO • LONDON • STOCKHOLM • AMSTERDAM • BRUSSELS • ZURICH • MEXICO CITY

Progress Report

(Continued from page 14)

create, or what merchandise is being sold or displayed under your lighting system . . . If you are not sure which lamp to use, run a few tests yourself in your own store, or ask someone who knows . . . If you feel that, because of the cost involved, you can't do your store lighting right—leave it alone until you can."

Customers like to see and handle merchandise and to a considerable degree make their own selections. Nelson A. Miller, Chief, Marketing Division, Office of Domestic Commerce, Washington, D. C., observed during the "Store Displays and Fixturing" clinic. He continued:

"This principle, of course, permits the customer to spend much of his own time in the selection of merchandise . . . at the best expenditure of time by store personnel, and hence at less expense to the store. While this principle is well-established and finds high acceptance on the part of customers, the planning of facilities, layout, and equipment for attaining this end requires a good deal of thought by the retailer and perhaps some experiments in certain types of equipment . . .

"The Department of Commerce has prepared a Store Modernization Check List. The purpose of this is not to tell you how to modernize your store but to tell you what the objectives sought should be and to give you a detailed list of facilities that might be improved . . . The over-all modernization plan should be in keeping with a pre-determined set of retail store policies designed to establish a store character or store identity in keeping with the policy of the retailer in serving a specific class of customers . . . The store front should be consistent with the store interior and both should be consistent with the general store policy."

The ideal set-up would be to have a minimum of fixtures. José Fernandez, architect, New York, told the same clinic group. He agreed with Miller that selection of merchandise by the customer, which he noted was accepted during war years when sales clerks were scarce, has become popular. But he urged careful organization of the store and creation of fixtures to display merchandise to best advantage—and accessibility.

"The average present-day designer wants to design fixtures that are unobtrusive, efficient, and inexpensive. There are many materials that may be used, glass being at the head of the list. Today we have non-shatterable, non-scratchable, laminated, heat-resistant glass . . . but I believe this could be improved by minimum thickness, thus reducing weight and cost. Plastics are light, but somehow their cost is too high at present and they lack abrasive resistance.

"There are two common failings: the emphasis given showcases, counters, etc., where the design is too elaborate and the merchandise does not stand out properly; and the improper housing or display of merchandise (inefficient handling, improper sizes of drawers, shelves, cases, etc.)."

Sales fixtures have three jobs to do: to store merchandise, to display all or part of that merchandise, to protect merchandise. Morris Ketchum, Jr., architect, New York, told those discussing "Displays and Fixturing." He added that not all fixtures have to perform all three functions, as in some types of stores shoppers are encouraged to handle merchandise, but

(Continued on page 18)

This REPLACEMENT BILL started in the specification

INVOICE
FOR REPLACEMENT OF ORDINARY SOIL PIPE:
Ordinary iron soil pipe after three years in a college laboratory. Since it was concealed in the ceiling, replacement was extremely costly. The Duriron pipe which replaced it has caused no expense since its installation sixteen years ago.

The corrosion that consumed this ordinary iron pipe took a bite into the building owner's pocketbook. Probably that replacement bill took more than a nibble at his confidence in some architect's judgment.

Stop that replacement cost *now*. Specify Acid Proof Duriron for Chemical Laboratory drain lines . . . and for any other corrosive handling waste system. Duriron simply ignores corrosives. Consult Sweets. Or get complete information by writing for Bulletin 703...today.

THE DURIRON CO., INC. • DAYTON 1, OHIO

Branch Offices in Principal Cities

DURCO Adv. 63-GM

DURIRON
ACID PROOF
DRAIN PIPE

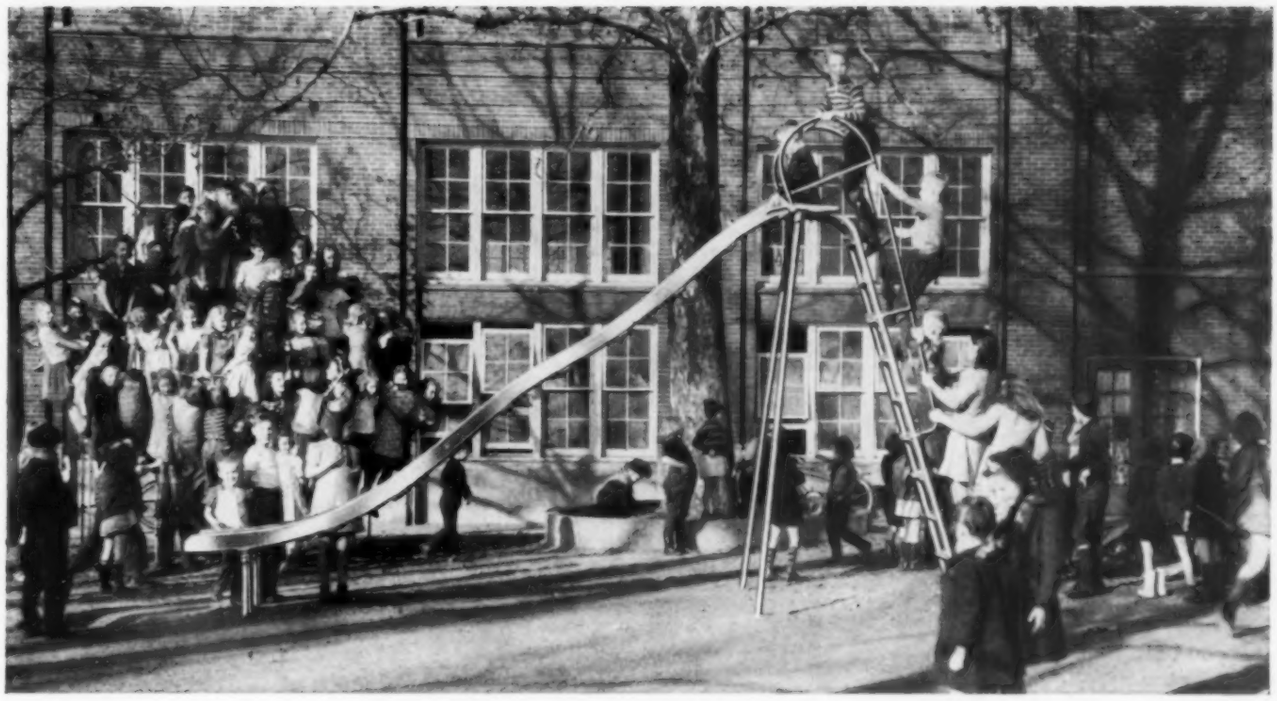

AMERICAN *Approved* Playground & Pool Equipment Built to Gain and Hold Your *Confidence*

● American's reputation for making the very finest Playground and Swimming Pool Equipment dates back more than a third of a century, to the company's inception in 1911. American men determined then to build only the best equipment money could buy, combined improved designing with superior materials and skilled craftsmanship to provide scores of new, ideal play-exercise opportunities for the nation's children and youth with absolute safety—safety that will *last!*

Not even during the recent difficult war years has American ever compromised in materials, design or construction; for, we regard the welfare and safety of your youngsters as our responsibility as well as yours. Instead, we've gone along in the good old American way building the best *Approved* Playground and Swimming Pool Equipment made; and today more customers than ever before continue to place their confidence in American at Anderson. American leads the field.

Learn why ***American Approved*** *Playground and Swimming Pool Equipment enjoys world-wide acceptance. Send for Literature, today.*

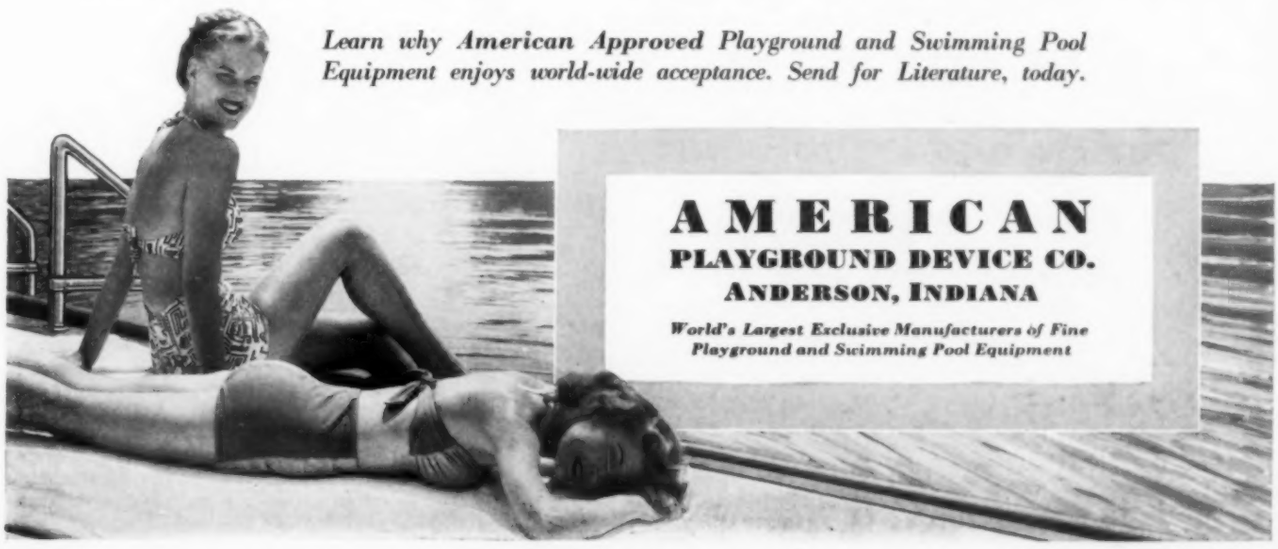

AMERICAN
PLAYGROUND DEVICE CO.
ANDERSON, INDIANA

World's Largest Exclusive Manufacturers of Fine Playground and Swimming Pool Equipment

Progress Report

(Continued from page 16)

the average sales fixture in the average store consists of a display layer set on an enclosed storage unit.

"The size, shape, and character of the merchandise will logically determine the shape, size, and function of the sales fixture," Ketchum explained. "Small precious objects need display and protection . . . Folded stock needs organized storage space and a measure of protection . . . Hanging stock needs to be racked . . . Packaged goods are self-protected and need only to be properly shelved or racked, to form an attractive display . . . Many items of merchandise need little or nothing in the way of a sales fixture.

"Displays and display backgrounds have both functional and aesthetic value. First, they act as signposts on the indoor shopping street. A sales department can be easily identified by a glimpse of some dramatic focal display. Second, merchandise always appears more attractive and interesting when shown in realistic fashion . . . Feature displays are a wonderful visual stimulus to impulse buying. They can often be divorced from the particular sales departments they represent and placed at strategic points . . . (to) remind customers of the scope of the store merchandising program."

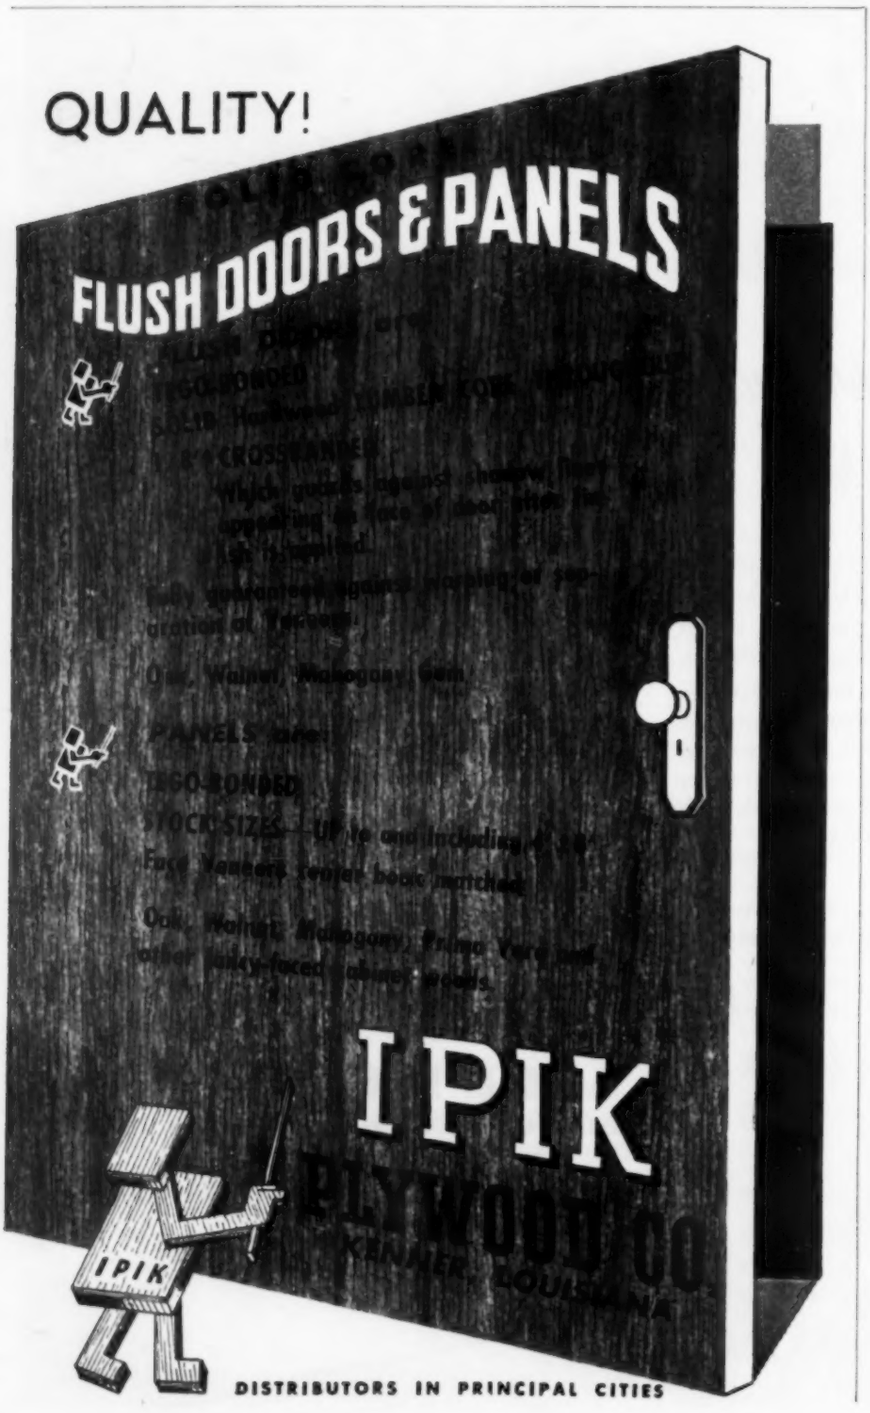

There has never been a completely successful store modernization project of any size, large or small, that was not preceded by a comprehensive, carefully prepared program of requirements. Daniel Schwartzman, architect, New York, told the clinic group considering "Planning and Budgeting for Modernization." Explaining his statement he added:

"The preparation of a comprehensive program of requirements should be the joint effort of the architect and the store operator. Neither of them can properly prepare this essential basis for a complicated project without the benefit of the other's counsel, and a complete interchange of ideas and information from the very beginning . . .

"It makes no difference who prepares the necessary factual data and analysis . . . as long as it is carefully done and complete . . . At this point it should be made perfectly clear that the only one who can interpret this data in dimensional requirements is the architect and the architect alone—because it is he who has been trained as a space designer . . .

"The essential factual elements of a typical program (in addition to the general statement of store policy and the aptitude and background of the store operators) are as follows: projected net yearly sales volume; percentage of that sales volume to be used as a basis for rental charges (the key to the entire question of how much we can afford to spend on the building project); net dollar volume per square foot of sales area; ratio of sales area to non-selling area (it is here that the architect can perform a most valuable service in increasing the sales area as practicable)."

Agreeing with Schwartzman that a careful Master Plan must precede any modernization effort, Jay D. Runkle, vice president and general manager of Crowley, Milner & Company, Detroit, admonished the same clinic group with:

"The very first question that must always be asked before any considerable expenditure is, "Is this necessary?" Management, he said, also must consider the effect of a considerable expenditure on working capital of the company. He added:

"In our own store we have consistently financed our improvements out of earnings, and we did not permit our capital or expense outlays to become burdensome in any one year."

P

CASE STUDY

Fields of Practice

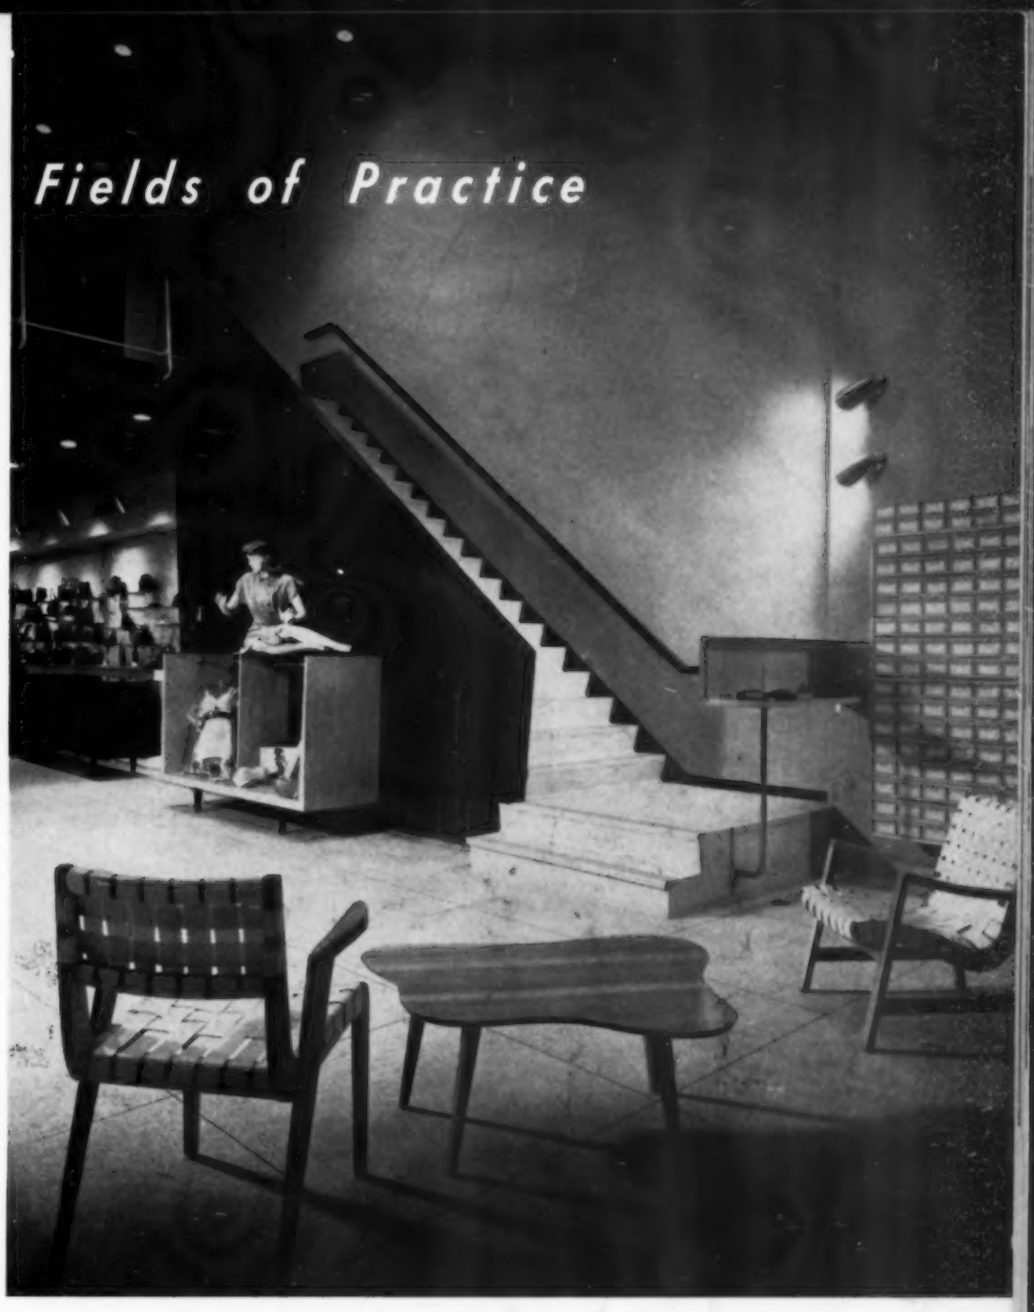

DESIGN OF RETAIL STORES

In the Office of KETCHUM, GINA & SHARP, Architects, New York, N. Y.

In this, the first of a series of studies of particular fields of practice in which individual firms have done outstanding work, we present a new means of evaluating architectural progress. Several instances of the firm's completed work constitute an important reference study in the field of retail-store design. But supplementing these and focusing on the methods by which this successful work has been achieved, we have a statement by one of the members of the firm as to how their office operates, the steps involved in developing a project, and an expression of their design philosophy.

A study of work by Ketchum, Giná & Sharp is particularly pertinent at this time, since Reinhold is just publishing a book entitled "Shops and Stores" by Morris Ketchum, Jr., the firm's senior member.

Subsequent studies will highlight other specialized fields of practice.

KETCHUM

GINA

SHARP

IN THE OFFICE OF KETCHUM, GI

ORGANIZATION AND PROCEDURE

The organization of Ketchum, Giná & Sharp consists of three partners, as principals, who initiate among themselves the design of any particular project. The job is then placed under the personal supervision of one of the partners who acts as design critic, with the aid of one of the men in the office as job captain. The job captain, in turn, has other men as assistants. The architectural staff, of about thirty people, is encouraged to assume responsibility and work together for the common good. The job captain's duties, besides the running and organizing of the project, are to meet the clients in question, cull the necessary information, sit in on conferences, supervise the work, and in general operate as an architect in his own office under the guidance and aid of the supervising principal. Each partner keeps constantly abreast of the work being turned out by the others.

A project is started in our office by analyzing the program of the merchant and the budget involved. Departmental case histories, management philosophies, objectives, and sales techniques are compiled. Complete data is collected on details such as display treatment, both inside and out, types and arrangement of sales fixtures, merchandise sizes, areas to be allotted for sales and services, receiving and shipping, etc. All such information is studied and correlated before any actual planning begins.

When the preliminary area plans showing the relationship and size of one department to another have been estab-

VALDIRI'S, BOGOTA, COLOMBIA. It is remarkable how closely the finished job follows the architects' sketch concept.

GINA & SHARP

lished, the various engineers are called in to furnish supplementary technical information. Preliminary working drawings showing the type and location of each sales fixture in every department are drawn up simultaneously with visualization sketches, thus illustrating each element of the total scheme.

Vertical and horizontal traffic diagrams for both customer and merchandise circulation are planned and checked. Space necessary for the management and operational functions of the store is planned and allotted. Provision is made for entrances and show windows. The decorative features of each department are studied in elementary form. The exterior is then designed to best express the character of the structure and the activities contained.

COSMETICS DEPARTMENT, Valdiri's.

VALDIRI'S was first published in project form in the May 1947 PROGRESSIVE ARCHITECTURE (pages 61-67). Reference to that issue will demonstrate the care with which the firm of Ketchum, Giná & Sharp works out all details of a store project in the design stage. In the planning of this six-level structure, the Bogotá firm of Henry C. Hudgins & Co. was associated with the architects.

A SPECIFIC CASE

To illustrate the processes that the client and architect go through to obtain the finished product, the Plymouth store at 187 Broadway, New York City, is taken as an example (pages 52-55). This store is one of a chain of women's specialty shops. The management selected this location because of the large numbers of business women employed in the surrounding neighborhood. A further reason for their choice of location was that this particular chain of stores has other branches within a few blocks' radius of the new site. This factor would help materially in their shipping, receiving, and advertising setups. The public in this area buys between the hours of 8:30 to 9:30 in the morning, 12:00 to 2:00 in the afternoon, and from 4:30 to 6:00 in the evening. These limited shopping hours make for a store where a maximum display of merchandise is of first importance. The merchandising program was planned primarily to take care of the demands for impulse and convenience buying.

A building budget was determined, based on the estimated cost for general construction, mechanical equipment, lighting, and sales fixtures plus the fixed charges for overhead, capitalization, rent, etc. The sizes of the departments and the types of merchandise to be sold were determined on estimated or established sales figures of their other stores. Once the interior sales program was decided upon, store-front space was assigned for the display of all the merchandise to be carried.

DESIGN CONSIDERATIONS

The aim of the design for the exterior was to provide a suitable background for the store's name and for enclosed exhibit area. Materials used were chosen for their permanence and low maintenance costs. Due to the peak crowds on the avenue that shop at specified times, a large arcade was necessary. The show windows were arranged around the arcade to stimulate the interest of the shopper in a further view of those exhibits carried inside. This was made as easy as possible by having the interior visible from the outside, giving assurance to the prospective customers that what was seen in the arcade would be multiplied many times over when they were inside.

The interior continues the exhibits displayed in the store front; walls are given over to uninterrupted and over-all displays. Showcases and wall cases have a

(Continued on page 53)

HANDBAG DEPARTMENT, along right wall, detailed on page 97. Note continuation of arcade ceiling within, under the mezzanine.

Lionel Freedman: Pictorial Service Photos

ARCADE front, leading the eye—and the customer—in.

SPECIALTY SHOP

NEW YORK, N. Y.

KETCHUM, GINA & SHARP, Architects

NOTE: The procedure followed in the design of this particular shop is described in detail in the accompanying article by Francis X. Giná.

PROGRAM: A women's specialty shop, planned for speedy selling within limited shopping periods—before work, at the lunch hour, and after office hours. The entire main floor to be treated as an appealing showcase.

SOLUTION: An arcade-type front, with displays continuing in from the outside; impulse merchandise lining both walls; more casual, demand merchandise placed in a mezzanine over the forward part of the store. Ingenious lighting to assist sales efforts.

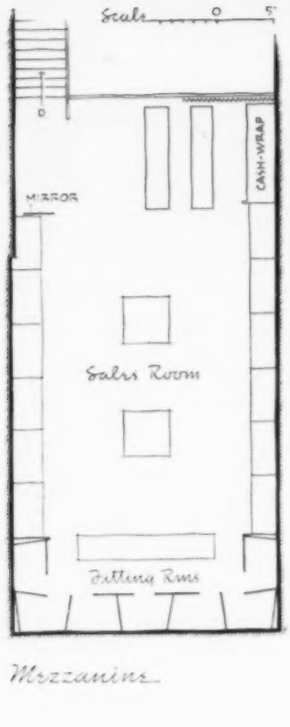

Mezzanine

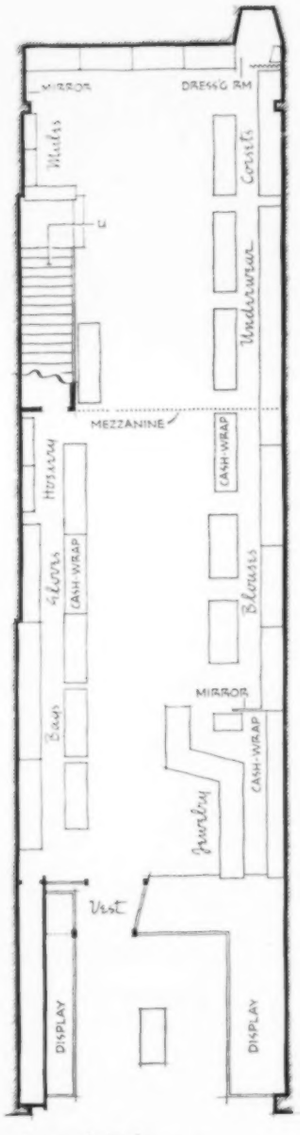

First Floor

PLANS

Maximum merchandise display governed the layout, walls being given over to display and sales space. Large stock rooms were unnecessary on this floor, restocking taking place from basement during shopping lulls. Cash-wrap stations liberally spotted to expedite sales.

(Continued from page 51)

minimum of hidden stock and were mainly designed for display and quick selection of goods. In a store of this type, emphasis is placed on providing the maximum amount of sales fixtures on the sales floor without sacrificing comfort or accessibility to the various departments. Showcases and wall fixtures are easily restocked in shopping lulls from a basement service area. Stockrooms and oversized fitting rooms adjacent to the sales floor are not necessary. Wrap and cash stations conveniently spotted on the sales floor help to make as brief as possible the time consumed by consumer and clerk in a transaction.

While mezzanines are usually placed in the rear of a store, such a plan would have made for an unfortunate architectural effect in this instance, since a narrow well would have been created between mezzanine and arcade. Therefore, the mezzanine was placed in the front section, partially over the store front, continuing the line of the arcade ceiling in one unbroken plane to the rear of the store.

A brightly illuminated curved and slatted wood wall in the rear of the first floor helped to cover some unsightly and awkward existing structural features. It also drew attention to the fact that another sales floor existed.

Demand merchandise, consisting of sportswear, skirts, slacks, and dresses, was simply strung around the side walls of the mezzanine. These articles helped to pull the customers through the store, forcing them to pass every department on their way in or out.

LIGHT AND COLOR

One of the most important elements in good store design is lighting. Insufficient knowledge of lighting and color effects make it impossible to exhibit properly, with the result that looking and buying become a chore rather than a pleasure. In the Plymouth store, a high intensity of incandescent illumination was provided in the show windows to counteract the effects of daylight. The downlighting in the ceiling under the mezzanine was kept at a much lower intensity than that of the show windows; reflection of light from the terrazzo floor uplighted the ceiling. Intense illumination was designed for the rear in order to draw people back. Supplementary display lighting was added to accentuate the drama of the total exhibit.

A white terrazzo floor was employed to give a surface that would reflect light and also act as a durable finish material for customer traffic on the first floor. On the mezzanine, where traffic was lighter and the shopping was at a much more leisurely pace, a gray carpet in harmony with the wall colors was employed. The red color of the ceiling under the mezzanine was carried out to the sign, helping to unify the transition from

(Continued on page 55)

MAIN FLOOR. White terrazzo floor; ceiling under mezzanine: red; brightly illuminated slatted wood wall at rear: yellow.

MEZZANINE. Demand merchandise; gray-carpeted floor.

SPECIALTY SHOP.

ENGINEERING OUTLINE

CONSTRUCTION: (Existing building.) **New framing:** steel for mezzanine. **Walls:** exterior: limestone and granite; interior: plaster, painted. **Floors:** main floor, terrazzo; mezzanine, carpeted. **Fenestration:** plate glass in aluminum sash. Acoustical plaster on ceilings. **Partitions:** dry built wood frame

(Continued from page 53)

outside to inside. A warm light gray color on the interior walls was used as a friendly background for the displays and cabinetwork.

It was decided to install an acoustical plaster ceiling on the first floor because of the din expected from the number of customers shopping at one time. Air conditioning was another device used to make shopping comfortable.

STAIR up to mezzanine.

DESIGN PHILOSOPHY

We have established certain principles in our retail-store work which summarize our philosophy of store design.

1. **Design as simply and straightforwardly as possible, avoiding the current cliches which soon become dated.**
2. **Subdue one's design in order to provide a framework and a suitable background for the excitement and color provided by the merchandise on display.**
3. **Use materials for the purpose they were intended and employ those materials with an eye to permanence and low maintenance cost.**
4. **Whenever possible, elements in a store should be so designed and detailed that they have great flexibility of use and will continue to offer maximum convenience no matter how the store is changed in the future.**
5. **Good design, in the final analysis, depends on good detailing. One cannot let one's guard down or lose patience. When this happens, the design as a whole usually suffers.**
6. **Last but all-important, thorough architectural supervision and constant follow-through down to the most minor detail create a job that one can be proud of.**

NEW YORK, N. Y.

The unique point of difference between residential and commercial architecture is that in store design the architect is dealing with a field of experts rather than with amateurs. The merchant knows his requirements, and the public knows what it wants. Merchants have learned the value of good store design in their business. The management of the Finlay Straus stores (pages 60-63) has found that good design has helped to increase their business from twice to three times its original volume.

The significant feature of the retail-design field from an architect's point of view is that there are no preconceived ideas to hamper him from turning out a solution that is as satisfactory to himself as a piece of architecture as it is to his client as a merchandising instrument.

FRANCIS X. GINA

and plywood. **Doors:** flush wood panel, generally; entrance doors: tempered plate glass.

EQUIPMENT: Cooling and ventilating system added to existing plant. **Lighting:** both incandescent and fluorescent.

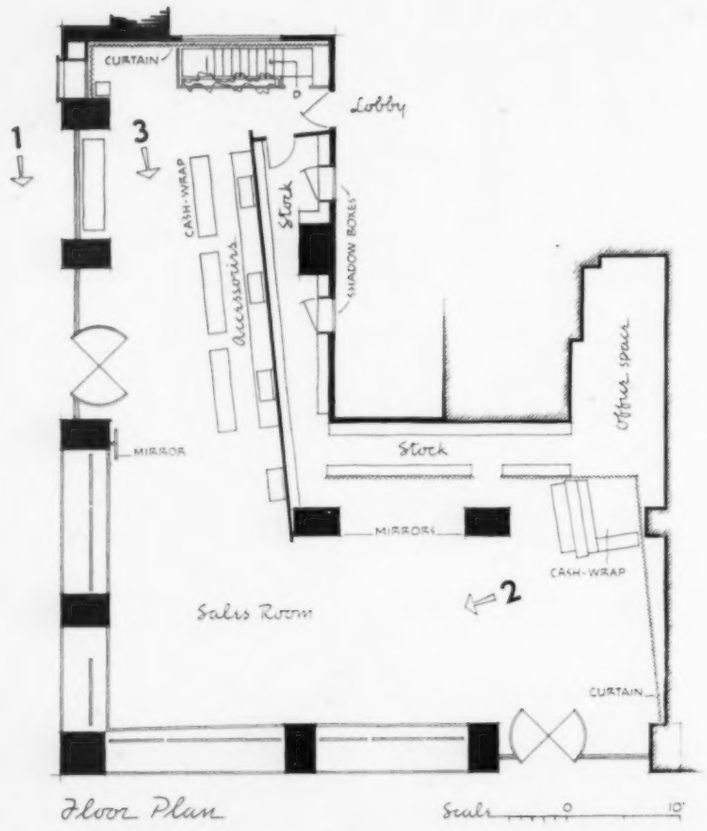

SHOE STORE

CHICAGO, ILLINOIS

KETCHUM, GINA & SHARP, Architects

A new shop worked out within an unalterable framework.

PROGRAM: To combine two existing rental spaces into a salon for the sale of women's shoes. Owner requirement forbade any essential change in the elements of the exterior of the building—a fireproof structure in Chicago's Loop; a corner location, with a third "front" opening into the building lobby.

SOLUTION: New display fixtures; a screen wall of hardwood introduced to background an accessories department and screen stock space in back; new lighting, and finishes; minimum change in existing structural and mechanical installations.

Hedrich-Blessing Photos

1. EXTERIOR. Display elements introduced in such a way as not to obscure full view of store interior.

2. SHOE SALES AREA. New hung ceiling conceals fluorescent lighting around perimeter. Interior columns, mirrored.

3. ACCESSORIES DEPARTMENT. The floor is covered with gray carpeting; screen wall of hardwood reeds.

FREE-STANDING CASES dress a big window.

SHOE STORE, CHICAGO, ILLINOIS

A wide range of architectural, mechanical, and decorative devices have been utilized to transform a matter-of-fact space into a rich, colorful environment for merchandising. The hung ceiling and all-over carpeting join the L-shaped space into a unit; the wood screen wall serves both a functional and decorative purpose. Lighting—fluorescent in the hung ceiling; above egg crates at the top of the smaller windows; incandescent ceiling downlighting and special spotlighting highlight the display and merchandising areas.

DECORATIVE CORNER leading to the building-lobby entrance.

ENGINEERING OUTLINE

CONSTRUCTION: (Existing space.) **Walls:** exterior: polished black granite; interior: white porcelain enamel; plaster. **Floors:** carpeting, generally; rubber tile. **Ceiling:** hung ceiling, plastered. **Fenestration:** bronze sash, plate glass. **Partitions:** plaster or hardwood reeds over plywood panels. **Doors:** flush, plywood panel.

EQUIPMENT: All heating and plumbing existed. **Lighting:** a combination of incandescent and fluorescent systems.

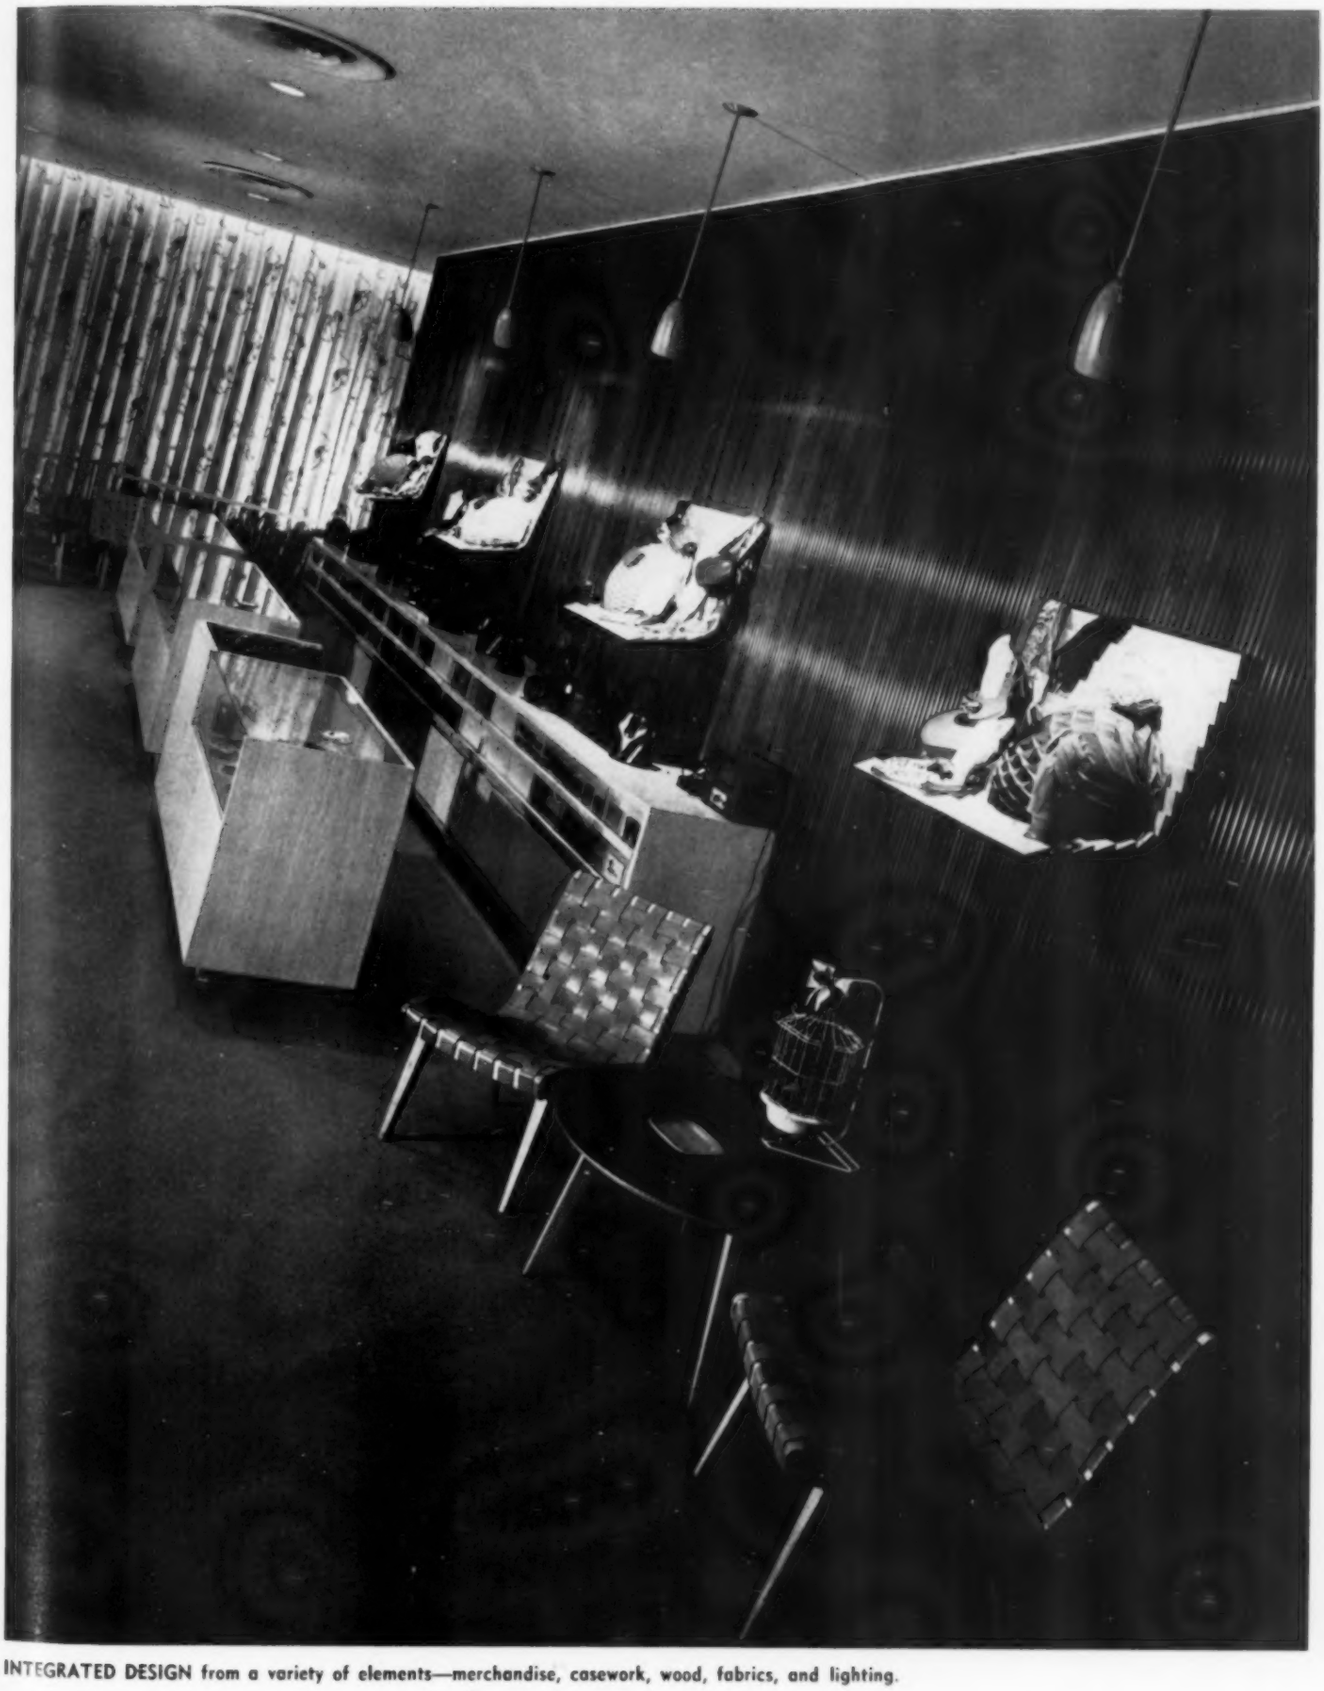

INTEGRATED DESIGN from a variety of elements—merchandise, casework, wood, fabrics, and lighting.

Ben Schnall Photos

FRONT. Ample, varied display space.

TWO JEWELRY STORES

1. JERSEY CITY, NEW JERSEY

KETCHUM, GINA & SHARP, Architects

Clean, architectural handling of a typical, long, narrow store space.

PROGRAM: Straightforward display of a great variety of small items from watches, rings, and diamonds to radios, toasters, and clocks. To be worked out on a single floor within a long, narrow rental space on a corner (the side street unimportant as regards pedestrian traffic).

SOLUTION: A recessed store front providing a generous amount of display window space of various sizes, widths, depths, and sill heights, to accommodate the varied merchandise. Casework and wall displays are grouped to set apart the numerous departments along the two side walls of the store.

Moderate-priced merchandise constitutes the main business. Hence, neat, orderly arrangement and simple wall surfaces take the place of lavish appointments. Smaller items such as jewelry and diamonds are handled in enclosed small-scale display shelving and cases. Larger items such as housewares and radios are displayed on open, flexible shelving on the left-hand wall. Basement storage is reached by a stairway through the door at the rear of the floor.

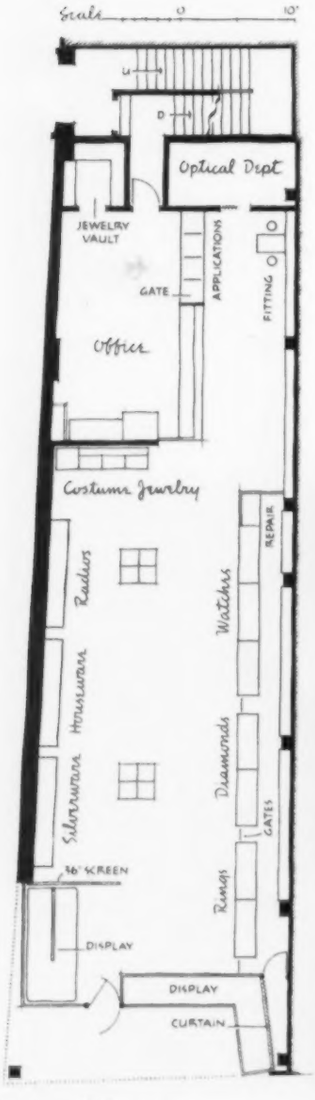

Floor Plan

ISLANDS supplement the main wall displays.

COSTUME JEWELRY occupies a corner of its own.

WALL SURFACE behind the flexible shelving is simply wood siding, painted. Ceiling finished in acoustical tile.

CASHIER'S DESK—a ready reference file.

ENGINEERING OUTLINE

CONSTRUCTION: (Existing building.) **Walls:** exterior: gray, polished granite, with base of black artificial stone. Interior: plaster, or wood siding, painted. **Floors:** terrazzo. **Ceiling:** perforated acoustical tile. **Fenestration:** bronze sash; plate glass. **Doors:** flush plywood inside; entrance doors: tempered plate glass.

EQUIPMENT: Air conditioning: heating and cooling. **Lighting:** incandescent fixtures generally; fluorescent lamps in casework.

Bern Schnall Photos

SILVERWARE department occupies the corner immediately inside the entrance.

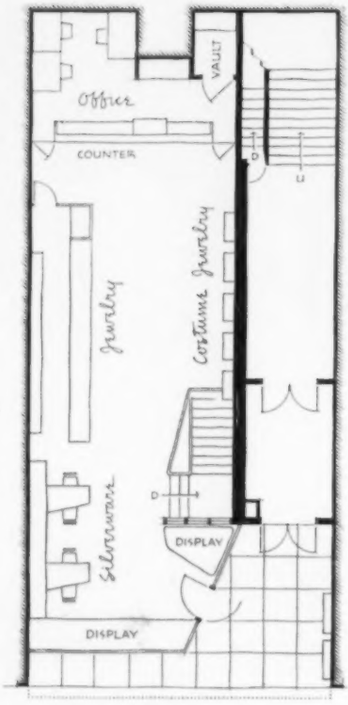

First Floor

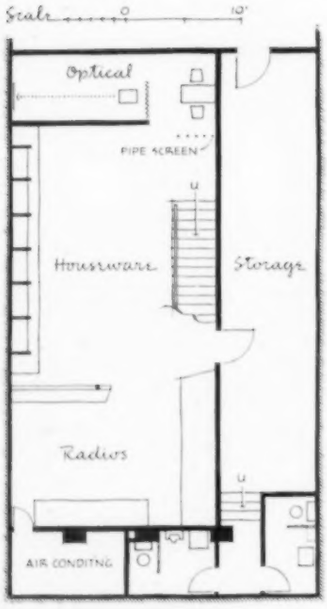

Basement

TWO JEWELRY STORES

2. STAMFORD, CONNECTICUT

KETCHUM, GINA & SHARP, Architects

A first-floor and basement scheme for the merchandising of a miscellany of steady-value, smale-scale items.

PROGRAM: To provide uncluttered sales floors for the numerous types of silver, jewelry, and houseware items carried by the store. A narrow, mid-block rental space, sharing the entrance area with an existing building entrance.

SOLUTION: A recessed store front, arranged with varied height sills, providing both window display and view of the store within. Simple alignment of departments along the interior walls of both floors, plus flexible fin display element projecting into the basement sales area.

Another unit in the Finlay Straus chain, this shop carries merchandise very similar to that of the Jersey City store. The design problem was also similar. Simple casework, good standards of lighting and display, ease of circulation, and an inviting atmosphere were more important than show. The various types of both wall and free-standing cases readily define the main sales departments. All smaller merchandise—silver, jewelry, costume jewelry, etc.—is organized on the main floor; the basement floor is given over to radios, toasters, typewriters, alarm clocks, and other related housewares. The shop is air-conditioned.

JEWELRY department; business counter, right. Stair rail is detailed on page 95.

COSTUME JEWELRY, etc. Wall cases.

ENGINEERING OUTLINE

CONSTRUCTION: (Existing building.) **Walls:** exterior: polished granite and (adjoining building entrance) wood battens; interior: plaster. **Floors:** terrazzo (main floor) and magnesium oxychloride tile (basement). **Ceilings:** acoustical tile. **Fenestration:** aluminum sash; plate glass. **Walls:** plaster generally; wood siding, painted. **Partitions:** plaster or plywood over wood frame. **Doors:** flush plywood panel; entrance doors: tempered plate glass.

EQUIPMENT: Air conditioning: heating and cooling. **Lighting:** both incandescent and fluorescent.

BASEMENT. The ceiling is perforated acoustical tile.

MEN'S CLOTHING STORE, **HARTFORD, CONNECTICUT**

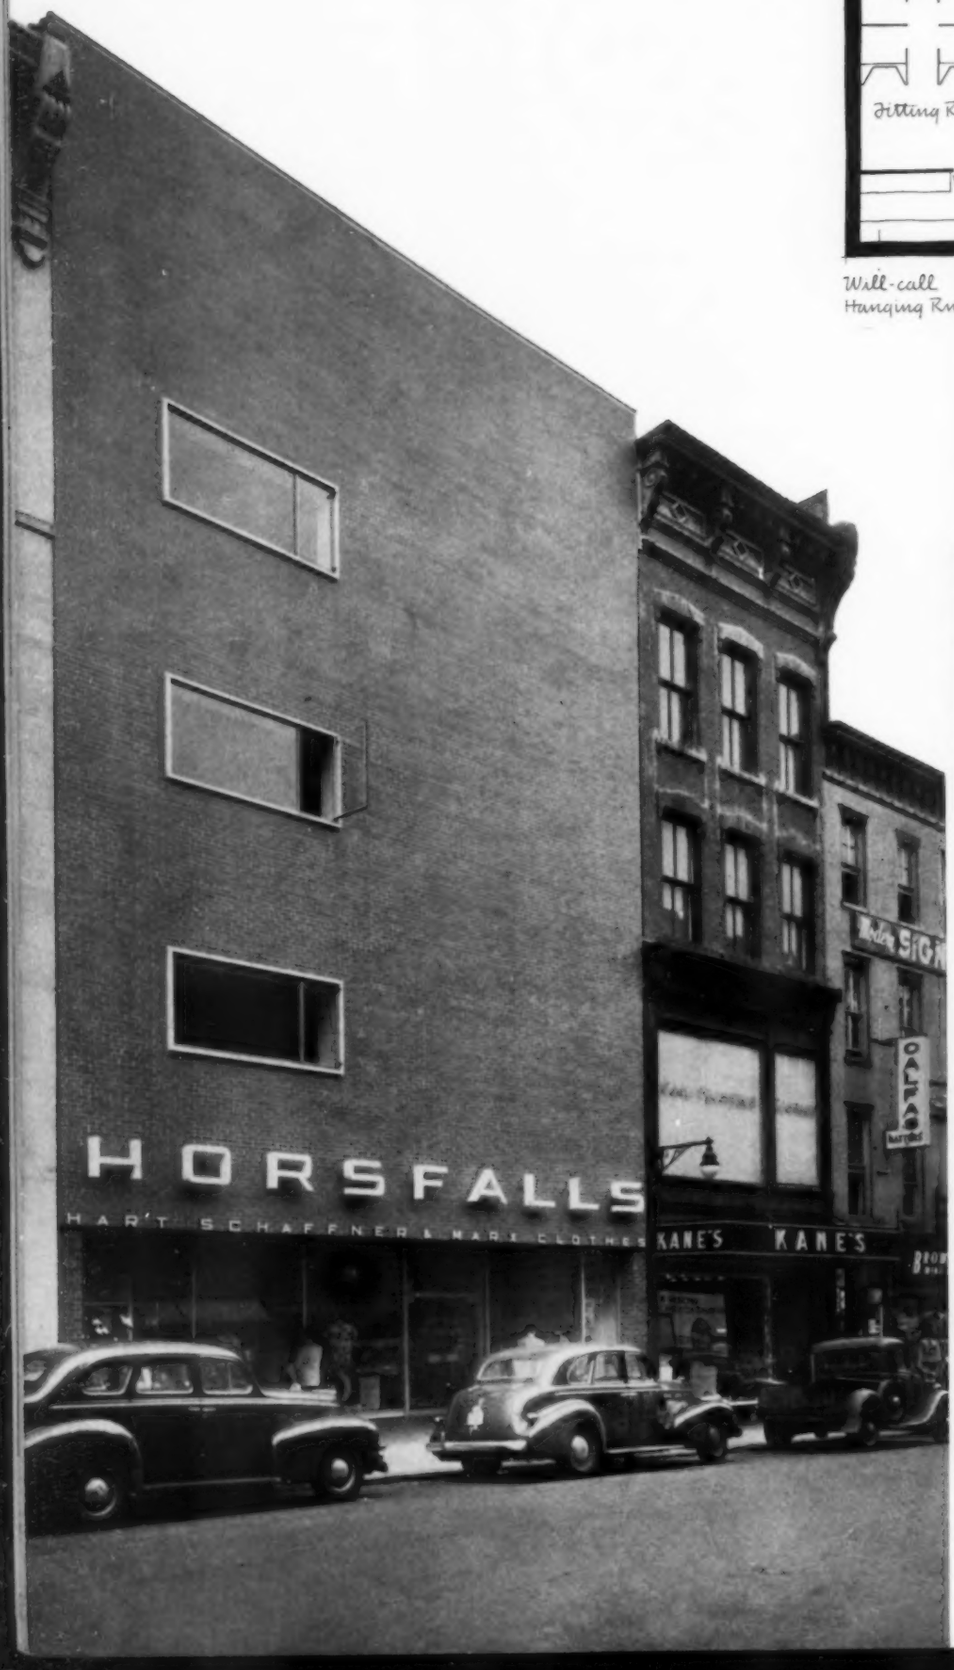

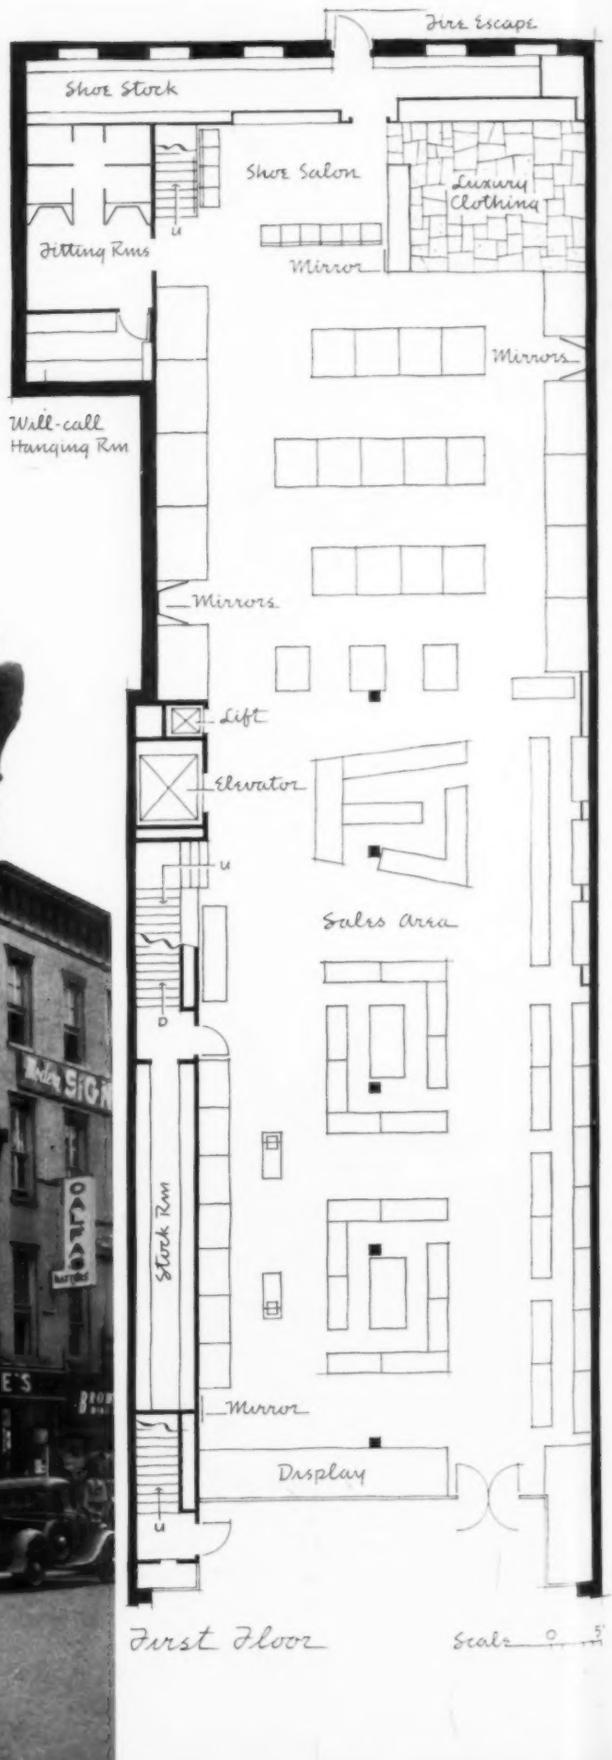

KETCHUM, GINA & SHARP, Architects

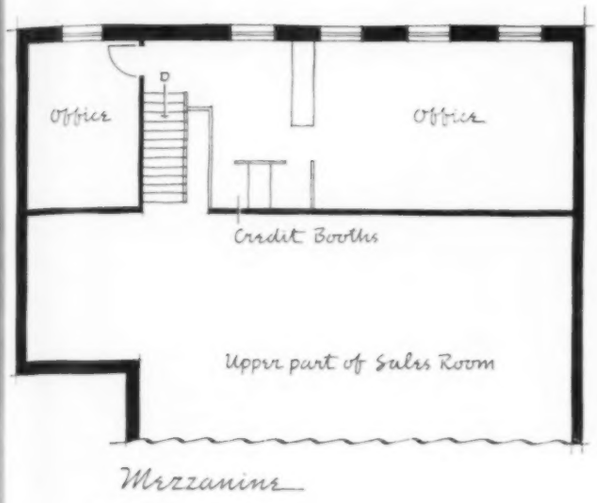

PLANS

The new, recessed front clearly sets the store apart from its neighbors, provides increased display-front area and offers an inviting view of the entire sales floor. It also offers a separate entrance at the side to upper floors (some space in which is at present rented to others). Both sides of the shop are lined with new, well-lighted cases and full-view sales counters. Interior islands handle small items such as ties, socks, sweaters, etc. Elevator is centrally located to serve upper floors when they are added to the retail-selling space.

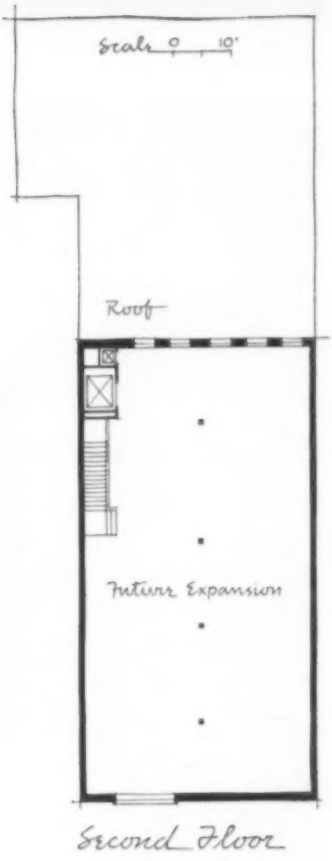

A smart, new urban shop replaces a nondescript, old structure.

PROGRAM: To develop a unified, modern shop for the display and sale of men's clothing out of an obsolescent 40-foot-front building, with cast iron and glass facade up to the third floor (somewhat similar to its neighbor on the left). Structural problems included elimination of brick party wall running down the center of the building on all floors.

SOLUTION: Removal of party wall; minimizing of the central structural columns by grouping merchandising units around them; new, recessed display front; entirely new facade; new surfaces, fixtures, and mechanical equipment. Only basement (storage), ground floor, and mezzanine at rear (manager's office) developed into retail shop at this time; other floors arranged for probable future expansion.

Ezra Schnall Photos

SALES FLOOR. Central islands grouped around structural columns handle smaller items such as ties, socks, sweaters, etc. Flooring is asphalt tile; ceiling finished in acoustical tile. Lighting outlets, air diffusers, and sprinkler heads are organized into a neat ceiling pattern.

MEN'S CLOTHING STORE

HARTFORD, CONNECTICUT

This store is a good illustration of the design philosophy of the firm of Ketchum, Giná & Sharp. Simple, straightforward approach is reflected in the plain, open-front display cases; everything is subdued to providing a framework and background within which the merchandise itself holds top place. Materials used look like themselves, and fussy, applied decoration is nonexistent. Departments are defined simply—a slight change in the casework line; a departmental grouping against a distinctive background, etc.—yet all are coordinated into a unified design. A complete air-conditioning system keeps the shop comfortable the year around.

A PROJECTING CASE defines and separates adjoining departments.

ENGINEERING OUTLINE

CONSTRUCTION: Framing: steel. **Walls:** exterior: brick; interior: plaster or cypress boards. **Floors:** wood; surfaces: asphalt tile, carpeting, red quarry tile or flagstone. **Ceilings:** white perforated acoustical tile. **Fenestration:** aluminum sash; polished plate glass. **Partitions:** dry-built wood stud. **Doors:** standard flush panel wood generally; entrance doors: tempered plate glass.

EQUIPMENT: Heating and air conditioning: steam boiler, evaporative condenser; heating and cooling—year-round conditioning; thermostatic controls. **Lighting:** combination of incandescent and fluorescent. **Special equipment:** sprinkler system; fire-stair doors; freight and passenger elevators.

ROBES in a wall-hung case.

SPORTSWEAR arranged in open cases in front of a simple wall of cypress. Ease of viewing and emphasis on merchandise are apparent.

STAIR at rear to mezzanine.

SUITS: open display racks.

Gottscho-Schleisner Photos

GLASS SHOP FRONT makes the entire main floor into a window display.



Mezzanine

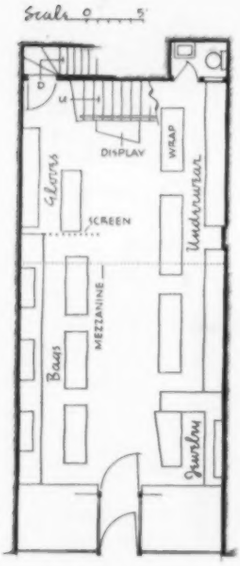

First Floor

SPECIALTY SHOP, NEW YORK, N. Y.

KETCHUM, GINA & SHARP, Architects

A sense of spaciousness achieved within limited confines.

PROGRAM: To work out an inviting, uncrowded women's specialty shop in an existing building with narrow frontage and modest depth. This store, incidentally, is for the same chain as the first store shown in this group.

SOLUTION: Facade simplified and opened up into a full wall of glass. Interior, including fixtures, organized and simplified to produce a sense of space. Stair to mezzanine placed on center both as a design element and to emphasize the fact that an additional sales floor exists. Departments kept to the two sides of the floor; door on center.

JEWELRY in a special case at the very front of the store.

DEPARTMENTS arranged along the two side walls, leaving a broad center aisle for easy customer traffic.

ENGINEERING OUTLINE

CONSTRUCTION: (Existing building.) **Walls:** exterior: window, with gray mosaic bulkhead; interior: plaster, painted. **Floors:** carpet or rubber tile. **Ceiling:** perforated acoustical tile. **Fenestration:** aluminum sash with plate glass. **Partitions:** wood frame with plywood or gypsum board surfaces. **Doors:** stock, flush panel, wood. **Entrance doors:** plate glass set in a metal frame.

EQUIPMENT: Heating: existing. **Lighting:** incandescent for general illumination; cold cathode in sales fixtures.

GLOVES set off by a partial screen.

TERRACE AND GARDEN FRONT.

Julius Shulman Photos

THIS ROOFTOP VIEW shows the two dwelling units stepping down the sloping lot; also the definition of garden and terrace areas. Exterior plaster is white.

PAIRED HOUSES

LOS ANGELES, CALIFORNIA

FRANK GRUYS & L. E. McCONVILLE, Architects

Simplified, multiple housing on a 50-foot lot—a Mention in this year's Progressive Architecture Awards program.

PROGRAM: To develop economical multiple housing with each unit having complete privacy, enclosed garden and terrace; to be built within the possibilities of G.I. financing.

SITE: A 50′ x 100′ lot slightly sloping from front to rear.

SOLUTION: The two houses aligned along the northwestern side of the site, leaving the southeasterly portion for terrace-garden areas. A long, simple rectangle utilizing standard 16-foot ceiling joists spanning the width; slab floor; simplified framing system.

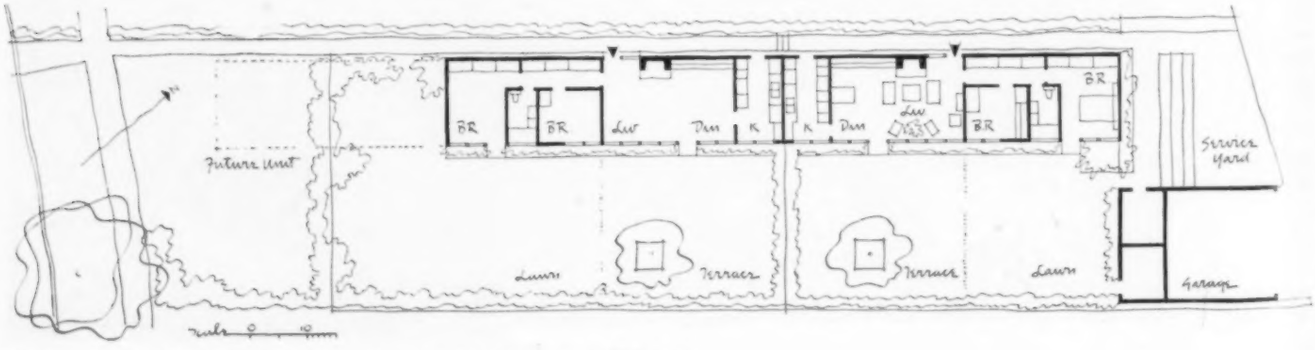

THE 3" x 4" FRAMING POSTS of the southeastern front are spaced 3'-4" o.c.

FRONT DOOR; translucent glass panel.

ENGINEERING OUTLINE

CONSTRUCTION: Foundations: concrete, poured integrally with reinforced concrete floor slab. **Framing:** redwood sills; standard fir wood stud, except in windowed wall portion, where white pine or select fir 3" x 4" posts are spaced 3'-4" o.c.; wood roof joists with solid bridging. **Walls:** exterior stucco on wire mesh over wire-reinforced waterproof felt; interior: plaster over gypsum-board plaster base; end walls of living room: striated plywood; linoleum around bathtub and kitchen work areas, and on counter tops. **Floors:** carpeting over the concrete generally; asphalt tile in bath and kitchen. **Roof:** white mineral grits on composition roofing over wood sheathing (4-inch batt-type insulation). **Partitions:** stud frame, plastered walls (insulation in wall between the two units). **Doors:** flush panel wood.

EQUIPMENT: Heating: gas unit heaters in general; electric wall unit in bathroom. **Electrical:** flexible metallic conduit; special lighting fixtures. **Special equipment:** double compartment kitchen sink; gas water heater.

LOOKING OUT from the living room to the private terrace; roof soffits are pale green.

PAIRED HOUSES, LOS ANGELES, CALIFORNIA

At left of the living room fireplace (photo at top) the storage units provide for books, firewood, dining-room accessories, etc. The plywood end wall is shellacked and waxed; other walls are painted. The bedroom view (bottom) shows the ingenious window detail, with fixed bottom panels and a sliding sash above, that allows full-width screened opening. The curtain track is an integral part of the design of the window unit.

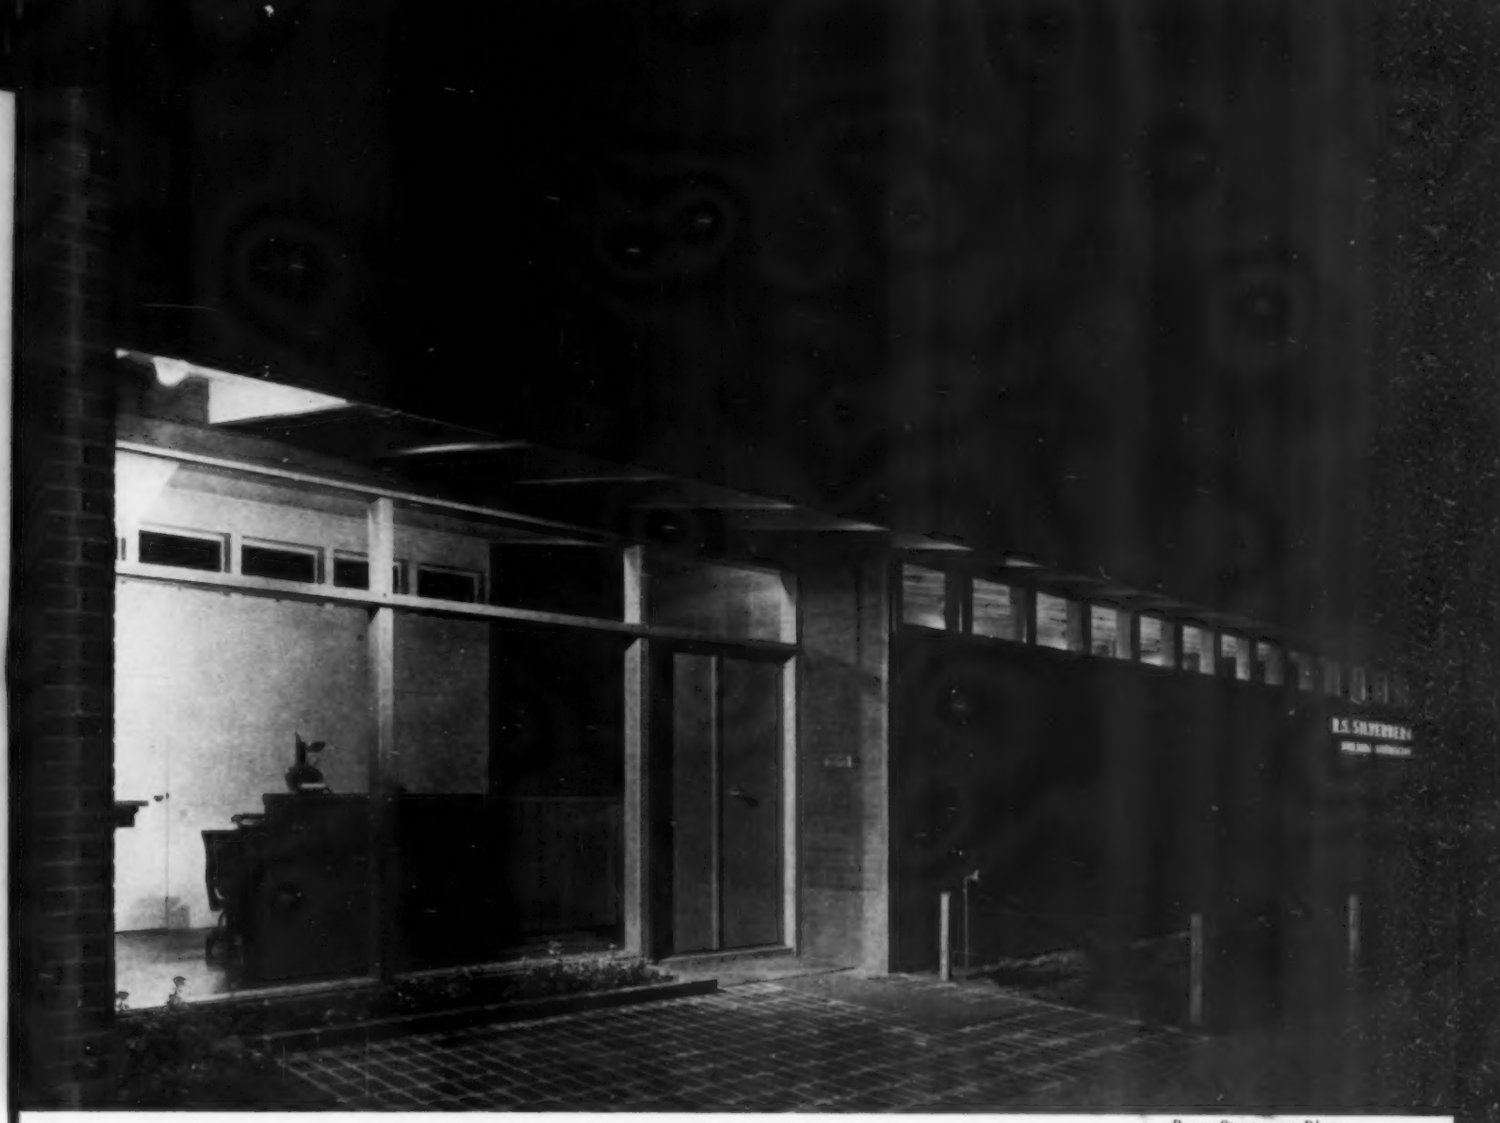

OFFICE ENTRANCE. Brick fire wall at end; front wall of shop surfaced with redwood.

Roger Sturtevant Photos

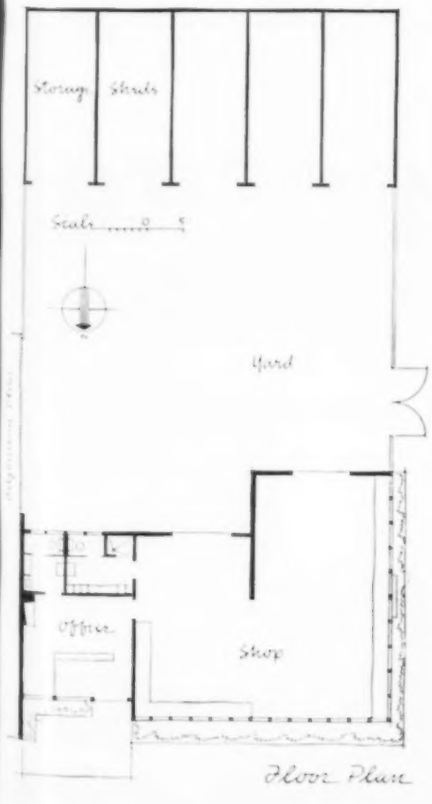

BUILDER'S

OFFICE, SHOP, AND YARD

OAKLAND, CALIFORNIA

FRANCIS JOSEPH McCARTHY, Architect

A. V. SAPH, JR., Structural Engineer

A remarkable instance of a contractor and architect sitting down together to produce a satisfactory architectural environment for the former's business activities.

PROGRAM: A building to serve a building contractor who specializes in remodeling and repair work—an office, space for a draftsman-shop foreman; workshop; equipment sheds for storage of stock, trucks, etc.

SITE: A level corner lot 53′ x 100′.

SOLUTION: Light frame structure on the corner, with a fenced yard separating the sheds, the wall of the building being a continuation of the fence; clerestory lighting for maximum use of wall space and screening of litter from view.

SHOP. The high wall serves as a screen; continuous glass provides ample light.

McCARTHY

Francis Joseph McCarthy studied at Leland Stanford Jr. University, completing his architectural training in various architects' offices, including Charles Dean's in Sacramento and William Wilson Wurster's in San Francisco. Own office opened, 1938. With the Rubber Redevelopment Corporation in Brasil in war years. Current work: residences, commercial work, alterations to San Francisco's Palace Hotel, and a few industrial jobs.

Builder's OFFICE, SHOP, AND YARD

A CLERESTORY brings southern sun into the office area.

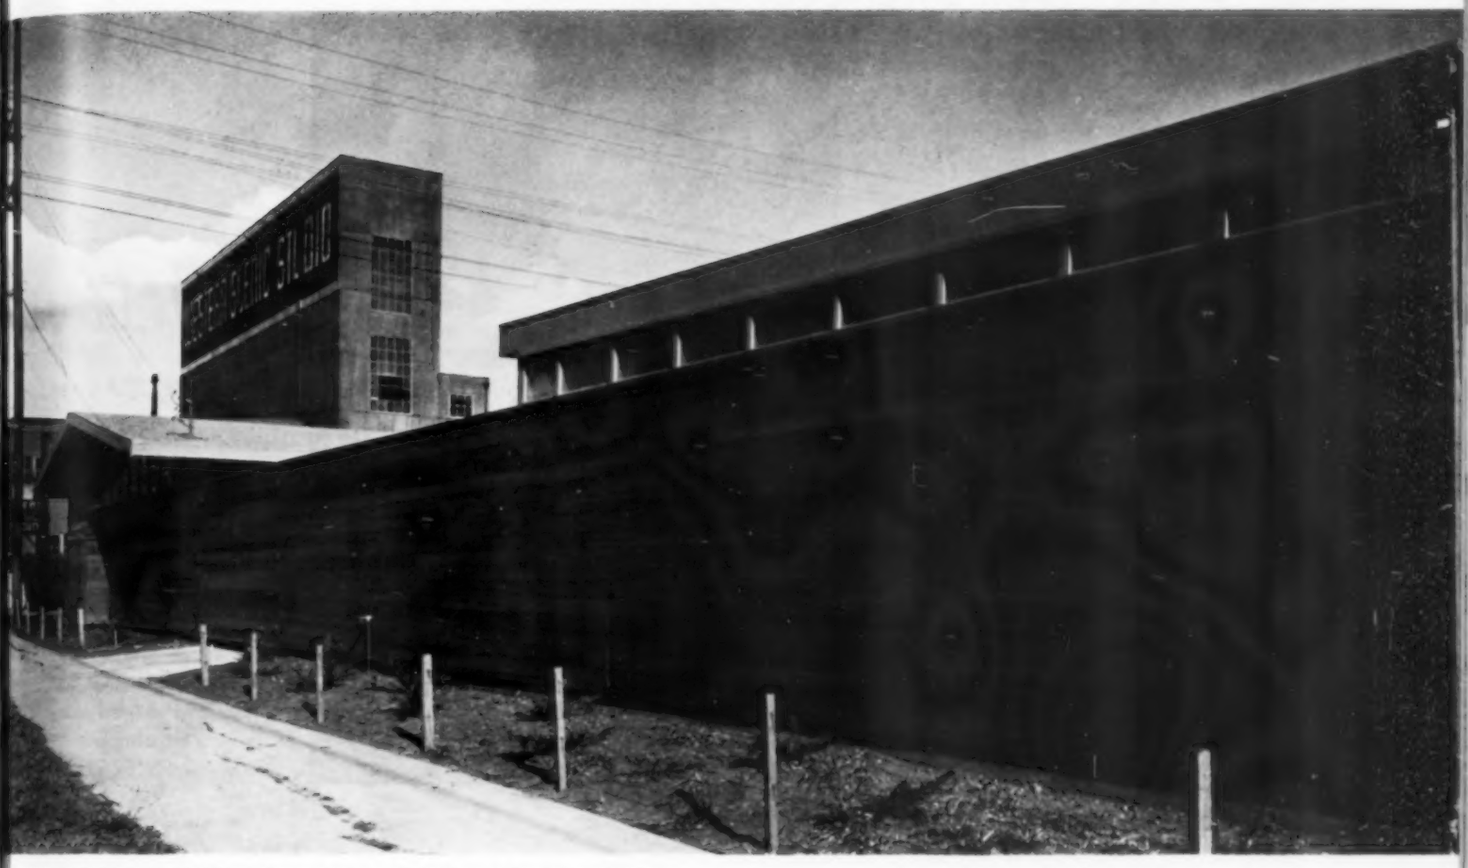

THE ENTIRE EXTERIOR of the project is treated as a fenced enclosure.

OAKLAND, CALIFORNIA

The R. S. Silverberg organization handles chiefly remodeling, repair, and fire-damage work. This required a shop for five or six employees in which minor millwork, such as running a limited amount of molding, and repairing and construction of individual casework, could be done. In working out the design with the client, Mr. McCarthy reports an unusually happy experience: "He knew what he wanted and didn't keep changing his mind . . . The planning of the job was handled by the contractor-owner and his shop foreman spending time in the office with me, and we discussed their operations back and forth until the plan emerged out of it." The office-shop structure was placed at the corner of the lot for its advertising value. The fireplace in the brick fire wall of the office is used both for heating and for burning up chips and waste.

REAR OF SHOP. Gate to side street, left.

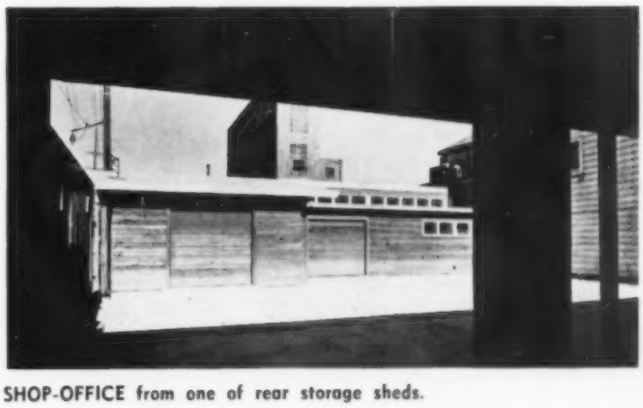

SHOP-OFFICE from one of rear storage sheds.

SHOP. Door at left opens to yard; stud walls spaced 32" on centers.

Builder's
OFFICE, SHOP, AND YARD

OAKLAND, CALIFORNIA

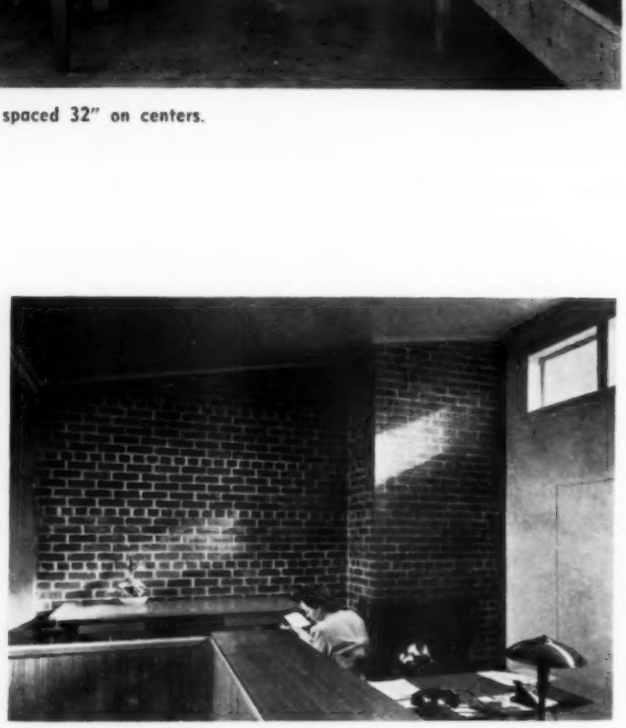

OFFICE. Brick fire wall; southern clerestory.

ENGINEERING OUTLINE

CONSTRUCTION: Concrete slab. **Framing:** #1 and #2 dimension fir; 6" x 6" corner and center posts; 3" x 6" studs 32" o.c.; 10" steel ridge I beam. East wall: brick. **Surfacing:** redwood, exterior; interior (in office portion only): plasterboard and redwood. **Floors:** the concrete slab, generally; asphalt tile in office. **Roof:** 3" x 8" wood joists, sheathing, tar and gravel. **Ceilings:** unfinished, except in office where plasterboard is used. **Fenestration:** wood sash, with double strength B quality glass generally, 3/16" crystal sheet glass in fixed glass areas. **Doors:** flush plywood; overhead doors in shop area.

EQUIPMENT: Heating: fireplace in office. **Lighting:** incandescent fixtures in shop; lumiline lamps above windows in office area.

ALUMINUM as a Structural Material

By PAUL WEIDLINGER

P/A presents the first sound technical study of aluminum as an architectural, truly structural, material to be published in the United States. The author, who has explored in previous articles for this magazine the potentialities of reinforced concrete and welded steel design, here digs into the relatively unknown field of structural design in aluminum. Paul Weidlinger has had considerable experience with this relatively new metal; he has, among other activities, been responsible for structural design of a prefabricated house, as yet not on the market, constructed wholly of aluminum.

SCOPE

Aluminum is becoming a full-fledged structural material. Its increasing acceptance is due to three factors: favorable physical characteristics; wide experience gained in its use in recent years: and the increasing current shortage and cost of steel and some other primary building materials. At present the use of aluminum is limited to a great degree to copying or imitating steel construction, which prevents full exploitation of the potential advantages of the newer metal. Such structures are uneconomical and not competitive under normal economic circumstances. However, by applying up-to-date engineering techniques, aluminum structures having distinctive characteristics can be designed; because these take full advantage of the specific characteristics of the material, they result in sound, extremely economical structures at cost equal to or even lower than those fabricated in steel.

I. INTRODUCTION

Aluminum has invaded building construction via the aircraft industry. This alone should be an indication that it could have a beneficial, progressive influence, provided it is not sidetracked into the familiar pattern of imitation of traditional materials. It is time to take stock, to decide into which direction practicing engineers and architects are to be led.

Although it was first produced in 1825, aluminum is still considered a new material. Its numerous applications, characteristics, advantages, and weaknesses are not yet completely explored. This applies especially to its use in buildings.

Aluminum differs a great deal from steel — the more widely used metallic structural material — yet it is reasonable to consider the two metals comparatively. An initial comparative study can be especially effective because in it one can point out the essential differences and, possibly, make it easier to avoid a familiar pitfall: use of a new material in ways really suitable only to its more familiar predecessor. Although transposition of design and production methods from an old to a new material seems almost an inevitable pattern of evolution (discussed in previous articles on reinforced concrete and welded structural steel[1]), there is always the possibility of speeding up this period of transition by calling attention to its dangers.

The most immediate, basic differences become apparent in such characteristics as strength, elastic modulus, resistance

[1] Architecture and Reinforced Concrete *(August 1943 P/A)* and Welding: Its Implications and Applications *(June-July 1947 P/A)*, both by *Weidlinger*.

Aluminum "Q-panels," insulated, were employed for walls in this projected house designed by Antonin Raymond and L. L. Rado.

Louis Checkman

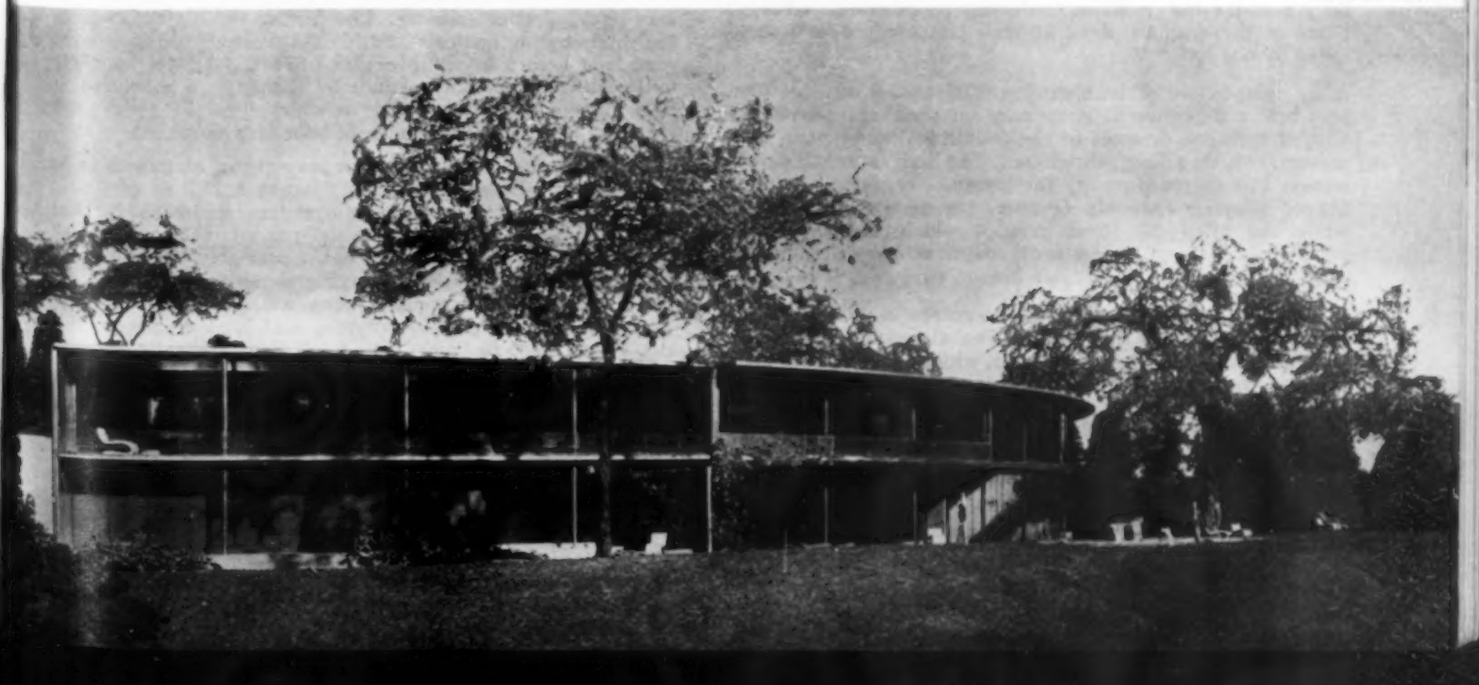

Photos courtesy Aluminum Co. of America

to chemical attack, corrosion, thermal characteristics, specific gravity, etc. As a direct consequence of such factors, there are specific methods of forming and fabricating aluminum, which in a number of instances are quite different from those suitable for steel. The advantages and limitations of these operations emphasize the special characteristics of aluminum.

The final, and equally important, distinction arises from the difference in basic cost of the two materials. Economy and cost are always of primary importance in engineering structures; they are further emphasized through increasing competition and become deciding factors in most building construction, subject always, of course, to availability of materials.

The implications of these essential differences lead to a design approach based in all instances upon the most logical application of aluminum.

II. CHARACTERISTICS OF ALUMINUM ALLOYS

Composition. Aluminum, like steel and other metals, is available in a diversity of alloys of varying strength and fabricating characteristics. They are usually divided into wrought and cast alloys. For structural framing of buildings only **wrought alloys** are important. These are classified in two groups, and **are designated with the letter S.**

The first group contains those in which various tempers are produced by cold working. Tempering changes the metal's strength characteristics and influences its workability. Softer alloys are of lower strength but are easier to fabricate. The temper designation always follows the letter S. **The soft condition is designated by the letter O. Fully hardened material is indicated by the letter H.** Intermediate tempers are indicated by fractions before the letter H (¼H, ½H, ¾H).

The second group contains heat-treatable alloys which usually have higher mechanical properties. Temper designation again follows the letter S and **the annealed condition is designated by the letter O. The letter T indicates that the alloy is in fully heat-treated condition** to develop its maximum strength. Some of these alloys, aged at high temperature, are designated by the letter W.

Alloy composition of both groups is identified by code numbers before the letter S. Aluminum for structural purposes is alloyed with one or more of the following: manganese, magnesium, copper, silicon, chromium. The high strength duraluminum 17S (second group) for instance, contains a total of 5% of alloying elements (copper, manganese, magnesium) while the alloy 3S (first group), which has the lowest strength but is very widely used, contains 1.2% of manganese only. (A new alloy, 24ST, has higher strengths than 17ST.)

In addition, corrosion resistance decreases as the amount of alloying elements is increased. The above-mentioned alloy 3S, for instance, is highly resistant, while 17S is quite susceptible to various types of corrosions. High alloy content usually means higher cost as well. 3S½H and 17ST are the most widely used materials; further discussion will be limited to these types; 17ST because its properties parallel those of steel.

Strength of the material is usually expressed in terms of tensile strength. **Ultimate strength** is the maximum stress (in pounds per square inch, psi) which the material can develop, while **yield strength** is the stress (in psi) at which the material exhibits a specified (standard) limiting, permanent set, or elongation.

Commercial grade structural steel (Carbon Steel for Bridges and Buildings, ASTM No. A7) has an ultimate strength of 60 to 72,000 psi and a yield strength of 33,000 psi. Low alloy, (special) structural steel can be also obtained with considerably higher strength values.

Against this, 3S½H aluminum has an ultimate strength of 21,000 psi and a yield strength of 18,000 psi. The corresponding values of 17ST are 60,000 psi and 37,000 psi, respectively, about equal to those of commercial structural steel.

In addition to tensile strength, compression and shear strength are important, but they usually bear a direct relationship to tensile properties.

There is a considerable cost increase from low- to high-strength alloys, due to the higher percentage of alloying elements. Hence, use of high-strength aluminum alloys cannot always be justified because other characteristics may outweigh strength in importance, as will be pointed out later. The commercial availability of both types of alloys therefore takes on great importance.

Elastic modulus, the exact measure of "elasticity," can be interpreted in its ordinary usage as the stress which, theoretically, would cause an elongation equal to the original length of a bar subjected to tension. For all aluminum alloys and tempers this value is approximately 10,000,000 psi; for steel, 30,000,000 psi. This applies also to compression and to other types of deformations composed of compression and tension, such as transverse deflection in bending. The modulus of elasticity also influences the elastic stability of structural members, which in practical application limits the loading of slender columns. The higher the elastic modulus the higher the critical load, i.e., the load which can be sustained before buckling occurs. (So-called local buckling, or buckling of certain portions or elements of a column, is also influenced by the elastic modulus, but the yield point strength is a more direct measure for this purpose.)

Weight. The most widely known property of aluminum is its light weight. Its specific gravity is about 2.70 as compared to 7.85 for steel. Aluminum alloys used structurally range in weight from 0.096 to 0.101 lbs per cu inch; weight (or rather density) of the metal is not appreciably affected either by the small percentage of alloying elements or by the various tempers. Commercially pure aluminum has a yield strength of 5,000 psi; by alloying and heat treatment this can be increased to 58,000 psi. A 1,000% increase in strength can therefore be obtained with only 4% increase in weight.

Resistance to corrosion and chemical attack. Although aluminum is not entirely immune to atmospheric or other corrosion, it exhibits higher resistance than any other commonly employed structural metal. Corrosion resistance

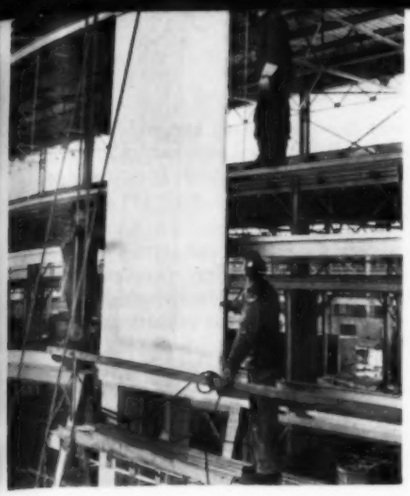

Alcoa's new sheet and plate rolling mill, Davenport, Iowa, should substantially increase the company's production. Steel framed, the mill buildings contain approximately 3-1/3 miles of 24-in.-wide "Q-panels" 1-⅜ in. thick, constructed of 14-ga fluted aluminum (exterior face) and 16-ga plain aluminum sheet (interior) with glass fiber insulation between. Panels have shiplap joints and are caulked. There are also 47 acres of aluminum roof decking, covered with 1 in. glass fiber insulation and built-up roof, on the buildings.

varies with the various types of alloys. Commercially pure aluminum, designated 2S (and also 3S) have the highest resistance to the atmosphere and salt water. Alloy 52S, however, is more resistant to salt water than 2S or 3S from the point of view of retention of mechanical properties and appearance. These alloys are generally used without special protection. The initial thin oxide surface film is usually sufficient to prevent further deterioration.

Heat-treatable, high-strength alloys, though more susceptible to loss of mechanical properties when exposed to corrosive conditions, are still considered resistant; their resistance is related to the temper. For severe exposure various means of protection are available. One method consists of coating the surface with a thin film of commercially pure aluminum. Metals treated in this manner exhibit a resistance equivalent to the alloys 3S and 2S. Other protective coatings can be produced by anodic oxidation or painting.

On the other hand, aluminum is highly susceptible to electrolytic corrosion. This occurs when dissimilar (electropositive and electronegative) metals are in contact in the presence of moisture. In such instances paint protection or other separation of the contact surfaces is usually sufficient to prevent corrosion.

Aluminum exhibits resistance to the attack of various chemicals, due to surface oxidation. Considering aluminum as a structural material, it is of special importance that gaseous compounds of sulphur, such as are present in the atmosphere of industrial centers, have no harmful action on the metal.

Thermal characteristics. Thermal conductivity of both aluminum and steel is sufficiently high to cause them to be disregarded as bulk insulating materials, although as reflective insulation both have possibilities (see below). The high conductivity of aluminum is important, however, since it makes possible the use of hot-driven rivets in heat-treated alloys without damage to mechanical properties.

The coefficient of thermal expansion of wrought aluminum alloys used for construction varies from 0.0000114 to 0.0000128 of an inch per inch per degree Fahrenheit. This is about twice as much as the coefficient for steel, which means that thermal expansion of large aluminum structures may present some problems. On the other hand, the secondary stresses caused by thermal expansion are lower than in steel structures because of the lower modulus of elasticity of aluminum.

The high reflectivity of aluminum has great importance in reducing heat losses. Aluminum reflects 85 to 95% of radiant heat, and its reflectivity does not diminish seriously with surface oxidation. The reflectivity of rolled sheet steel is 35% and of galvanized steel 72 to 77% only.

The properties of a few aluminum alloys used structurally, compared with those of structural steel, are shown in **Table 1.**

III. FORMING AND FABRICATION

While there exists a fairly accurate general impression of the strength and elasticity of aluminum, its "secrets" of forming and fabrication are much less known. The wide use of aluminum extrusions has been much publicized, resulting in an almost universal impression that everything aluminum is made by extrusion. Although this is far from the truth, extrusion has greater potentialities in aluminum than in steel. Principles of forming and fabrication are basically the same for all metals, but differences in physical properties require modifications in these operations. Aluminum is one of the most workable of common metals. One pound of aluminum can be formed into a foil of 30,000-sq-in. area, or into plates up to three inches thick. It can be drawn into a wire 20,000 miles long, or into a rod eight inches in diameter.

The availability of various types of alloys and tempers usually permits a choice which is satisfactory as to both structural requirements and workability. Non-heat-treatable alloys work-harden as they are formed; for severe working operations it may be necessary to start the operation in softer temper than one would otherwise select. Simple light-gage

TABLE 1. TYPICAL PROPERTIES OF ALUMINUM ALLOYS AND STEEL A7

	Alloy	Temper	Yield Tensile Strength Psi	Ultimate Tensile Strength Psi	Weight Lbs/cu in.	Modulus of Elasticity Psi	Alloying Elements				
							Copper %	Silicon %	Magnesium %	Manganese %	Chromium %
Non-Heat-Treatable Aluminum Alloys	3S	0	6000	16000	0.099	10000000			1.2		
		¼H	15000	18000							
		½H	18000	21000							
		¾H	21000	25000							
	52S	0	14000	29000	0.096	10200000				2.5	0.25
		¼H	26000	34000							
		½H	29000	37000							
		¾H	34000	39000							
Heat-Treatable Aluminum Alloys	14S	T	58000	68000	0.101	10600000	4.4	0.8	0.8	0.4	
	17S	T	37000	60000	0.101	10400000	4.0		0.5	0.5	
	24S	T	46000	68000	0.100	10600000	4.5		0.6	1.5	
Carbon Steel	A 7 ASTM		33000	60/72000	0.284	29000000					

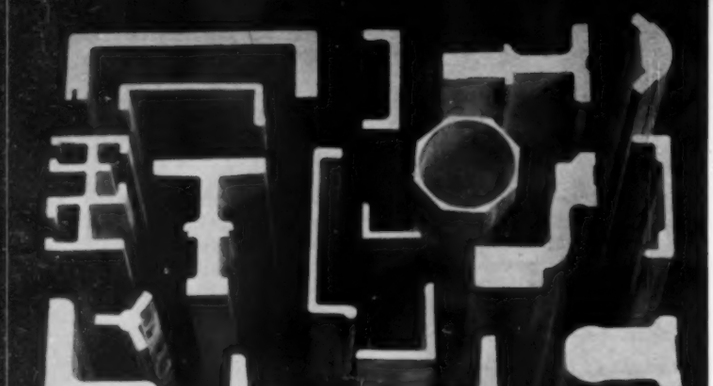

Some of the shapes currently being extruded in aluminum by Reynolds Metals Co.

structural shapes in ½H temper can usually be cold formed without difficulty; some shapes are formed even in ¾H temper.

The sudden change in temperature caused by quenching heat-treatable alloys can cause distortions in fabricated parts which have to be removed by subsequent rolling or stretching. This must be taken into account when solution heat-treatment is used on formed members.

Hot-forming produces castings of various types, by forging and hot-rolling. Of these operations only the latter is important in ordinary structural applications, for heavier structural shapes. Rolled aluminum shapes are today produced with cross-sectional areas up to 30 sq in. and up to 85 ft in length.

Other methods include extrusion and cold-rolling. Extrusion's main merit is the low cost of extrusion dies, which permit forming simple or intricate shapes at high speed. A number of standard structural shapes (I-beams, channels, etc.) are extruded. A great variety of shapes can be extruded in various alloys, but there is a definite limit to weight per foot of length and total weight of the member. In general, shapes of which the largest cross-sectional dimension is over 11 inches cannot ordinarily be extruded.

Equally important is cold-rolling of light-gage sections (usually up to 0.10" thick). All such sections have in appearance the typical character of light-gage members: stiffened edges, rounded corners, etc. These sections find an increasingly wide application in aluminum construction.

Riveting is practically the same as for structural steel. Both aluminum alloy and steel rivets are used. Squeeze-type riveters are preferred on aluminum rivets, which usually have a cone-point head developed especially for aluminum. Rivets up to ½ inch in diameter are usually cold-driven; larger sizes are hot-driven. Riveted aluminum compression members show a characteristically close rivet spacing in order to avoid buckling of the component parts between the rivets. Spacing between rivets is usually not less than three diameters and the edge distance not less than 1.5 diameters.

Welding. Although aluminum can be torch- or arc-welded, certain inherent characteristics limit the application of all such fusion welds for structural purposes. The most weldable structural alloy is 3S (for higher strength non-heat-treatable 52S is used; but this presents some difficulties). In higher strength, heat-treatable alloys, welding tends to destroy the effects of prior heat-treating, since annealing temperature is exceeded in the metal adjacent to the weld. In addition, because of the relatively high coefficient of thermal expansion, it is difficult to avoid considerable buckling and distortion in the joints. It is generally admitted that at the present time "where the joint is depended on for maximum efficiency, torch-welding and in many cases arc-welding cannot be considered equal to a well designed mechanical joint."[2] On the other hand, a number of satisfactory fusion-welded assemblies were manufactured during the war for the US Army Air Corps and Navy.

Considerably less doubt exists as to the reliability of well designed and executed resistance welds. Of this category, spot and seam welds should find increased use in light-gage aluminum structures. Spot welds very often replace riveting, a practice particularly justifiable in assemblies of thin aluminum sheets in which the reduced bearing area makes rivets inefficient. Furthermore, spot and seam welders can be operated at a speed which makes their use very economical: seam welders operate up to 30 ft per minute. Because of the different physical characteristics of aluminum, the technique and equipment employed differs considerably from that used for steel. Although some skill is necessary to operate spot and seam welding equipment, in selecting and maintaining electrodes, and selecting proper pressure and current, it is a complete mechanical operation as compared to arc or torch welding.

IV. ECONOMIC ASPECTS

The most important cause for the recent expansion in the use of aluminum as a structural material is twofold:
1. A current shortage and increased cost of steel.
2. Expansion of aluminum producing capacity, plus substantial price reductions in recent years.

Since these factors have a substantial influence on the work of designing engineers and architects, they merit close examination. Although the steel industry is producing near capacity, the demand for finished steel in 1948, including both domestic and export needs, is likely to exceed production by 8%, or from three to five million tons. Shortages are particularly acute for light-gage sheets. Automobile production, the oil industry, and railroads are short of steel; export requests are not being met; the shortage of structural and reinforcing steel is quite notorious. Production will undoubtedly be expanded somewhat, but present plans will take about two years to come into full effect.

In contrast to this, since World War II aluminum has been, until recently, quite readily available. In five years aluminum ingot capacity has increased 700%, and fabricating capacity (in some products) 45-fold. Before the war the demand for aluminum, compared to steel, was almost negligible: 350 million lbs per year. After the war, capacity was a staggering 2.3 billion lbs. During the war years the aircraft industry consumed all but 20% of total production, but since V-J Day the effective capacity of the aluminum industry (mainly of Alcoa, Reynolds Metals Co., and Henry Kaiser's Permanente Metals Corp.) has fallen back to 1.3 billion lbs. This is due partly to the uneconomical expansion policy necessary during the war, which cannot be supported at present. In 1948 the three principal aluminum producers are already operating very close to economic capacity. Of this, the building industry demands over one-third of the total, and a critical aluminum shortage is rapidly developing. The situation is aggravated by a number of other factors: there is a shortage of electric power, of which the aluminum industry is one of the largest consumers; imports from Canada are being reduced; the government stock of pig aluminum is gone while scrap aluminum is more and more difficult to get; and rearmament needs are increasing again. The relatively small output of aluminum (650,000 tons) against the much greater steel production (84,000,000 tons in 1947) means that it will not soon supplant steel on a wide scale. But the war and immediate postwar years, when aluminum was still readily available, were used by the aluminum industry to make a serious inroad into the steel market; and a great number of users who switched to aluminum only because of the steel shortage are going to continue to use — or try to use — this material.

As an additional factor, the increasing cost of steel against the lowered cost of aluminum also enters the picture. Aluminum is the only important structural metal of which the price has been reduced in recent years. Aluminum ingot sold at 20.5 cents a pound in 1939 as against 16 cents at present;

[2] *Alcoa Aluminum and its Alloys. Aluminum Company of America. Pittsburgh, 1946.*

on a volume basis aluminum has become the cheapest nonferrous metal. Of course, in spite of this, aluminum is still a high-cost metal, whether compared with steel by weight or by volume. Aluminum sheet sells at about 27 cents a pound as compared to 4 to 6 cents for steel. One pound of aluminum sheet will cover nearly three times as large an area as one pound of sheet steel of the same thickness, but even on this basis the cost of aluminum is more than that of steel. This cost margin disappears at the present steel "gray market" price of 14 cents a pound, but under normal conditions the higher cost of aluminum is the most important single factor which affects adversely its widespread structural use. This higher cost can be partially offset by some specific advantages: economically the most important factors are high scrap value (at present scrap is selling for more than virgin metal) and low maintenance cost due to the corrosion-resistive properties of aluminum. On this score aluminum can be compared in some instances with stainless steel sheet, which costs at base price 40 cents a pound; aluminum is of course considerably cheaper. The previously discussed physical properties of aluminum can be more fully exploited technically, as will be shown later, and these together with the economic factors will ultimately permit its fully competitive use. The situation presents a real challenge to designers of aluminum structures.

V. RELATIONSHIPS AND IMPLICATIONS OF PHYSICAL CHARACTERISTICS AND ECONOMIC ASPECTS

The preceding essential discussion has covered the general properties of aluminum and steel; certain conclusions become more revealing if the comparison is carried further. Consideration of the major structural properties such as strength and elasticity becomes really meaningful only if they are related to other characteristics such as specific gravity, corrosion resistance, cost, etc.

Strength. The light weight of aluminum is often used as the basis to which other characteristics are related. Technically this is called the "strength-weight ratio," which in this discussion means the relationship between ultimate tensile strength and weight per cubic inch. **The strength-weight ratio can be visualized by imagining a length of vertically suspended wire, of one square inch cross-section, which will just snap under its own weight.** Since such an aluminum wire (of alloy 17ST) would weigh 1.2 lbs. per linear foot, the length at which it will break by its own weight can be obtained by dividing its ultimate tensile strength, 60,000 psi, by 1.2. This will give a wire 50,000 ft long. A corresponding wire in 3S½H would be only 17,600 ft long due to its lower strength, which would be about the same length as a similar wire made of structural steel (ASTM A7). This means that the strength-weight ratio of aluminum is higher than that of steel for certain high-strength alloys only. **The same relationship is expressed by "specific strength," which is obtained by dividing ultimate tensile strength by specific gravity.** Taking the specific strength of steel as 1.00, corresponding values for 17ST are 2.8 and for 3S½H, again, only 1.00.

On the basis of specific strength, cost of the material can be put into a clearer relationship by establishing price paid per pound per square inch of strength. Taking the cost of sheet steel at four cents a pound, of 17ST at 30 cents, and of 3S½H at 27 cents, the **"cost-strength ratio"** of the three materials is proportionately: 1.0 to 2.6 to 6.7. If strength alone governs, material cost of an aluminum structure of

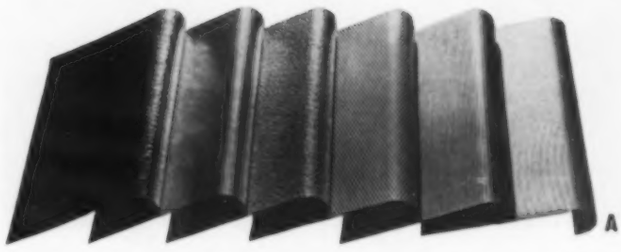

A

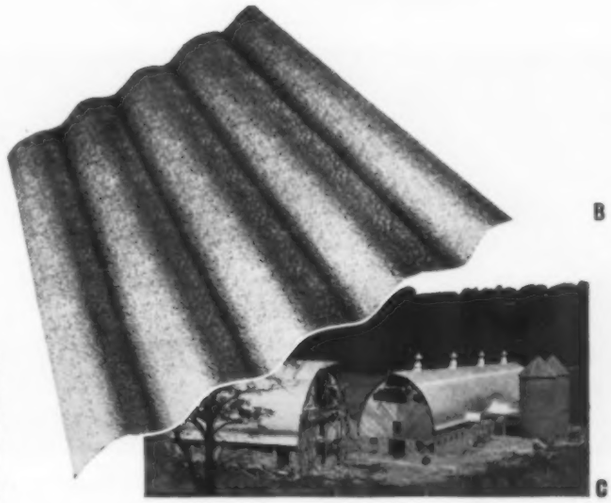

B

Reynolds Metals Co.

C

Permanente Metals Corp.

D

Reynolds Metals Co.

E



F

Various current uses of aluminum. . . . . . ***Photo A,* sheet aluminum embossed to increase its rigidity as well as for surface pattern. *B,* embossed corrugated sheet is a direct adaptation from a more familiar material, with the addition of a special surfacing to reduce glare. An "industrial" type of corrugated sheet just introduced exploits aluminum's characteristics more fully and will support greater loads. *C,* farm buildings are an important market for this type of product. *D,* Kaiser aluminum siding has some justification; using small units, sprung into place, reduces the possibility of "waving" and combats thermal expansion; but why negate its reflective insulating value by painting, and why so close an adherence to wood techniques? *E,* air ducts formed of a workable aluminum alloy. *F,* aluminum tubing forms the frame of a lounge designed by Ferdinand C. A. F. Kramer, architect. Of all these uses, duct work and chair seem wholly logical from the author's viewpoint.**

Courtesy H. H. Robertson Co.

Doubleday Doran's new building at the Garden City Press, Long Island, N. Y., is surfaced with aluminum "Q-panels."

Courtesy H. H. Robertson Co.

Federal Telecommunication Laboratories, Nutley, N. J., demonstrate the adaptability of "Q-panels," used vertically, to curved as well as flat surfaces.

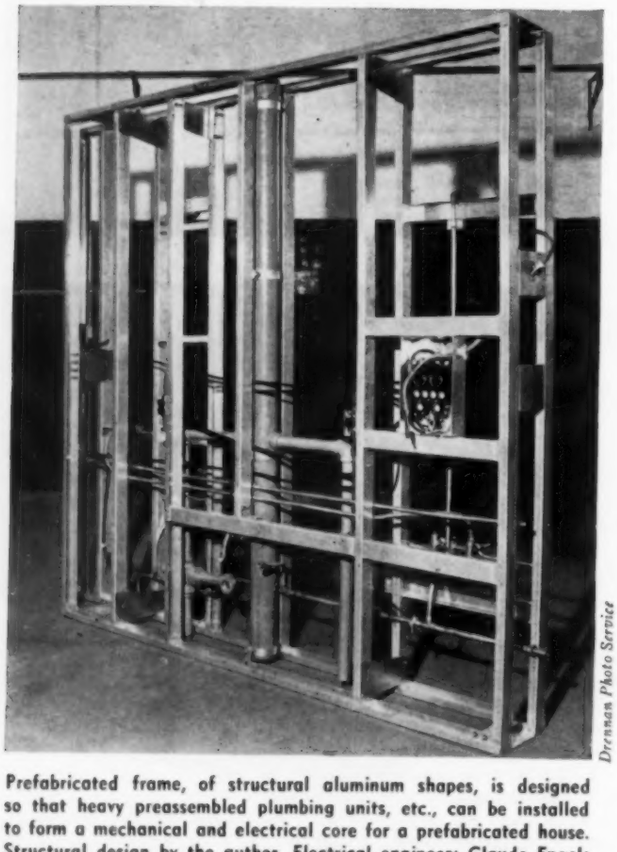

Drennan Photo Service

Prefabricated frame, of structural aluminum shapes, is designed so that heavy preassembled plumbing units, etc., can be installed to form a mechanical and electrical core for a prefabricated house. Structural design by the author. Electrical engineer: Claude Engel; mechanical engineer: Morris Shapiro.

17ST alloy will be 2.6 times as much as steel, of 3S½H, 6.7 times as much. In all suitable aluminum alloys and tempers, the cost will be from two to seven times as much in steel. Another obvious conclusion is that in such instances it is more economical to use the high-cost, but also high-strength, alloys of the heat-treatable group (14ST, 17ST, and 24ST); provided that forming and fabricating, which are more difficult, will not offset the gain.

These conclusions, however, must be modified by additional factors which favor aluminum. Often disregarded, these facts dispel the mistaken notion that aluminum is, and will remain of necessity, a high-cost structural material.

Of two identical structures supporting identical loads, the weight of the steel structure (dead load) will be about 2.8 times that of the aluminum one. **In heavy structures with high dead load-live load ratio this permits a further reduction in quantity of aluminum, since it carries less dead load.** The reduced weight affects other construction factors, permitting lighter and therefore cheaper foundations; it also reduces the cost of erection and transportation of materials. Weight reduction also has an obvious economic effect on transportable structures.

The high strength-weight ratio has an additional advantage in that it makes possible the use of a larger mass of materials of the same weight. This means increased safety, essential in structures subject to heavy vibration, as well as a considerable gain in load-carrying capacity in bending. Of two plates of equal width, span, and weight, an aluminum plate is 2.8 times as thick as a steel plate. If the materials have equal compressive and tensile strengths (structural steel and alloy 17ST) the aluminum plate has 7.8 times as much load-bearing capacity as the steel plate of the same weight. In this case the strength-weight ratio for transverse bending is 7.8 for aluminum against 1.00 for steel. Yet, *since cost per pound of the two materials is in about the same ratio, but in inverse proportion, the cost-strength ratios are equal.* In this instance aluminum is fully competitive with steel on the basis of strength alone, disregarding such other advantages as greater safety and lower maintenance.

Aluminum's corrosion resistance reduces maintenance cost by eliminating the need of repeated painting of exposed members, and increases their safety. It also permits design of structures having parts not accessible for painting (narrow box girders, etc.), which therefore could not be designed in the same shape in steel. **In addition to these obvious advantages, corrosion resistance offers, when related to strength, other favorable possibilities in light-gage construction.** When such structures are built of corrodible metals, the minimum thickness of the material is often determined by corrosion. In a number of structural applications this leads inevitably to "overdesigning." In light-gage steel, for instance, it is usual not to use members made of sheets thinner than 0.06 in. (16 ga), disregarding strength requirements. This limitation does not apply to aluminum, of which it is practical to use sheets half the thickness permissible for steel, or even less. In a number of instances even this reduced thickness would not justify the use of high-strength alloys, but cheaper ones such as 3S can be used. Reduction of thickness from 0.06 to 0.03 in. means a weight ratio of about one to six as between aluminum and steel, which brings first cost of the aluminum structure close to the cost of steel. Additional maintenance and fabrication advantages further reduce the cost difference.

Elasticity. Load-bearing capacity of structures is also limited by the maximum permissible elastic (i.e., not permanent) deformation. The magnitude of elastic deformation is inversely proportional to the elastic modulus of the material, which is constant for most metals up to a certain stress limit. In aluminum it does not vary materially for different types of alloys or tempers. Deformation is also a function of other factors (type and intensity of loading, geometrical shape of the member, and type of supports).

Since the elastic modulus of aluminum is 1/3 that of steel (10,000,000 psi to 30,000,000 psi), of two identically loaded structures which are geometrically and otherwise identical, the aluminum one will deform three times as much as the

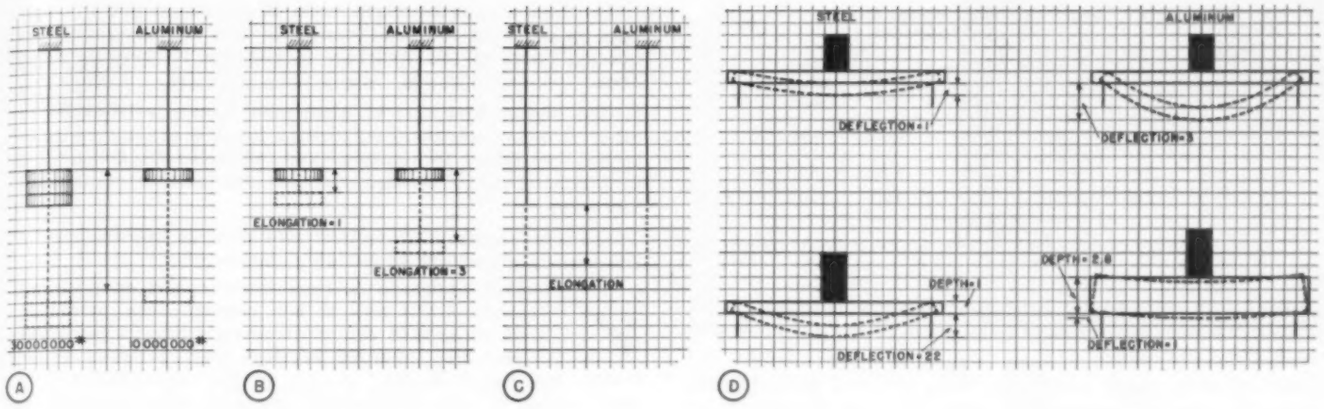

MODULUS OF ELASTICITY

This is represented by the load required to stretch a wire of 1 sq in. cross section to twice its original length (*A*). *B*, under the identical loads, an aluminum wire will stretch 3 times as much as a steel wire of the same dimensions. *C*, under their own weight, both steel and aluminum wires of identical dimensions will stretch the same amount. *D*, top, of two girders of *identical dimensions*, the aluminum one deflects 3 times as much under the same load. *D*, lower, of two girders of *equal weight*, the aluminum one can be 2.8 times as deep as the steel girder, and will therefore deflect only 1/22 as much.

steel. Since the aluminum structure is nearly three times as light as the steel structure, however, they will deform the same amount under their own weight. This concept is similar to the strength-weight ratio or specific strength. **This can be visualized by assuming vertically suspended aluminum and steel wires of the same cross-sectional area and length which will stretch an equal amount under their own weight.** In other words, because the elastic modulus and specific gravity are in the same proportion in both steel and aluminum, both materials have the same **"specific elasticity."**

Due to the equal specific elasticity of the two materials, in structures where elastic deformation is the governing factor, the basic material cost of aluminum will be 6.7 times as high as that of steel if 3S alloy is used, or 7.5 times for 17ST. In such structures nothing is gained by using high-strength alloys. In light structures, where the superimposed loads are large compared to dead load, aluminum will deflect three times as much as identical steel structures.

These drawbacks, however, can be turned into advantages. **The high deformation of aluminum is an advantage in structures subject to sudden impacts,** since the large deflection absorbs the energy of sudden loadings; the aluminum structure acts as its own shock absorber, reducing the increased stress caused by impact. A similar consideration applies to stresses caused by temperature deformations. Although the coefficient of thermal expansion of aluminum is twice that of steel, temperature stresses are 50 percent lower since the elastic modulus is only 1/3 that of steel. This materially affects design of statically indeterminate structures.

Aluminum's light weight gains special importance in transverse deflection. Of two plates of equal span, width, and weight, the aluminum plate will be 7.3 times as stiff as the steel plate; i.e., deflection under the same load will be 7.3 times as large in the steel plate as in the aluminum one, since the aluminum plate of the same weight is 2.8 times as thick as the steel plate and deformation is proportional to the depth cubed. Under such circumstances aluminum construction can be substantially cheaper than steel.

The **low elastic modulus of aluminum is to its disadvantage if the material is used as a slender column and is compared in load-bearing capacity to an identical steel column.** Such columns carry loads directly proportional to their elastic moduli; capacity of the aluminum column is 1/3 that of the steel column; **but if the aluminum column's weight is increased its capacity soon exceeds the steel column's,** while substitution of higher strength aluminum alloys does not



ULTIMATE TENSILE STRENGTH

This is the load which can be supported, without breaking, by wires of 1 sq in. cross-sectional area.

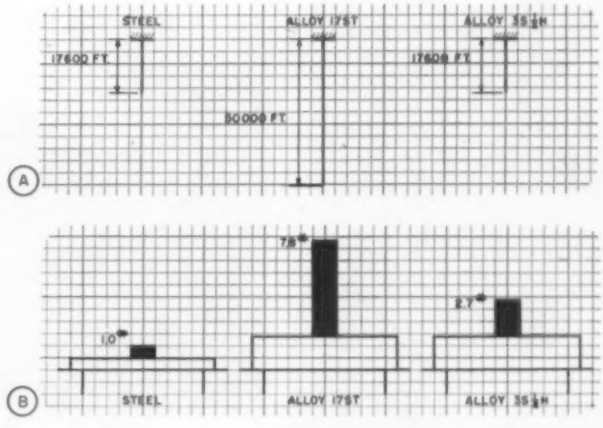

STRENGTH-WEIGHT RATIO

***A*, the length of a wire of 1 sq in. cross-sectional area which will snap under its own weight is a measure of strength-weight ratio. *B*, of two girders of *equal weight*, the aluminum one can be 2.8 times as deep as the steel girder and will therefore support greater loads.**

TABLE 2. PROPERTIES OF ALUMINUM ALLOYS AND STEEL COMPARED

Alloy	Specific Gravity	Strength-Weight Ratio	Elasticity-Weight Ratio	Cost per Weight	Cost Strength Ratio
3S½H	0.35	1.00	1.00	6.75	6.70
17ST	0.35	2.80	1.00	7.50	2.60
ASTM A 7*	1.00	1.00	1.00	1.00	1.00

**Values for structural steel assumed as unity for purposes of comparison*

influence its capacity. In **Table 2**, strength, elasticity, weight, and cost values for structural aluminum alloys are compared with those for steel.

Some of aluminum's properties, such as yield and ultimate strength, can be improved by alloying, heat treatment, or cold working; others, such as specific gravity, crystal structure, or modulus of elasticity, cannot be changed radically since they are inherent characteristics of the material. Cost, availability, and similar economic factors are not within the immediate sphere of influence of designers and engineers. Yet all these facts affect structural design and can be summarized as follows:

1. Steel structures "converted" into aluminum by copying steel design are not competitive economically or technically. Cost of aluminum in such structures is two to seven times that of steel.

2. In structures where strength is of primary importance, high-cost-high-strength, heat-treatable alloys give economical results.

3. In structures where deformation governs, and in slender columns, low-cost-low-strength alloys are usually economical.

4. Whether strength or deformation governs, it is economical as well as technically sound to increase mass and dimensions of aluminum members.

5. The low elastic modulus of aluminum is an advantage in structures subject to impacts or to temperature stresses.

6. In light-gage construction the minimum thickness of aluminum members can be determined by strength and rigidity requirements alone, without regard to limitations imposed by corrosion.

7. The high strength-weight ratio of aluminum permits savings by reducing the dead load; this also affects other load-bearing parts of the structure in addition to metallic members.

8. The higher first cost of aluminum is counterbalanced by other economic advantages, such as lower erection, transportation, handling, fabrication, and maintenance costs. The high reflectivity of the material also reduces thermal insulating costs.

These conclusions point toward two distinct approaches for the use of aluminum in building construction:

✔ **One approach is opportunistic and easy to accept. Until now it has usually been preferred. It recognizes the shortcomings, due to both high cost and inherent physical characteristics of the metal, and limits its use strictly to the somewhat narrow field where it can successfully compete with steel on an equal basis, by taking direct advantage of its positive characteristics: corrosion resistance, light weight, high reflectivity.**

The other approach, not less obvious, is somewhat more difficult to follow. However, it offers a wider scope; and it is the one which this article suggests.

✔ Close study of the physical characteristics of aluminum has shown that in spite of its high cost, the metal's inherent characteristics can be turned to advantage even though some of them do not compare favorably with those of steel. This approach is not revolutionary; it is rather the logical application of sound, up-to-date engineering principles: full advantage is taken of all favorable characteristics, the weaknesses are turned into virtues. **Instead of adapting the material to the preconceived structure, the structure is adapted to the material.** This approach requires some imagination in conceiving specially suitable structural shapes, specially designed structures, which will perform as satisfactorily as their counterparts in steel. However, one cannot make exaggerated claims; aluminum will not completely displace steel. The second approach does not even necessarily mean sharp competition, but rather **a widening of possibilities in the use of structural materials, permitting a larger selection to obtain the most efficient results.**

Part II, to appear next month, covers specific structural developments peculiarly suited to aluminum.

Photos courtesy Reynolds Metals Co.

Left, Apostolic Church, Louisville, Ky., being constructed by members of its congregation. Studding, trusses, reflective foil insulation, and siding are aluminum. *Center*, erecting structural aluminum framing (prefab) for demountable midget auto race track designed by Leon & Lionel Levy, architects. *Right*, aluminum framing and sheet in a structure similar to the more familiar Quonset hut.

Materials and Methods

RESEARCH REPORT 2

INSULATION

for Concrete Floor Slabs on Grade

In March 1945 the U. S. National Bureau of Standards released data[1] on heat losses through concrete slab floors, which has become an accepted construction method although there are still complaints that such floors are "cold." Recently the National Research Council of Canada released its report on radiant-heated concrete floor slabs.[2] Within the last few months Professor A. B. Algren, of the University of Minnesota, has published a paper on the same subject;[3] his findings closely parallel the Canadian Council's. The Vermiculite Association is also sponsoring current research into the question,[4] and although their information is not yet ready for publication, we have received from the Zonolite Corporation considerable data indicating the direction their work is taking. The U. S. Housing and Home Finance Agency has also published material on the subject.[5] The following text and drawings summarize and coordinate findings of all these agencies, in the second of PROGRESSIVE ARCHITECTURE'S RESEARCH REPORTS.

In its pioneer work on the subject the National Bureau of Standards discussed both slabs laid directly on grade and those built over crawl spaces; the Canadian research covered both slabs on grade and wood floors over 6'-6" clear basements. Professor Algren's work and that undertaken for the Vermiculite Association (so far as we are informed) deals with slabs on grade, and this Report is restricted to the same subject.

NBS concluded that loss of heat through the slab directly to the ground was probably unimportant; that loss to exposed edges of the slab was considerable; and therefore that insulation of the slab's exposed edges had greater importance. The construction shown in Fig. 8 was suggested as probably the most practicable method of insulating grade-level floor slabs. However, it should be remembered that, first, temperatures within the slab and in the soil beneath it were not recorded in the NBS procedure (thermocouples were placed on the slab's top surface); and, second, that the NBS test rooms were heated by electric-steam radiators, not by radiant coils in the slabs.

Very recently the U. S. Housing and Home Finance Agency released data on methods of insulating floor slabs[5] which was obviously based on the 1945 NBS report quoted. The methods of insulating construction suggested were all variants of the type shown in Fig. 8; in some cases it was suggested that the insulation be placed in the center of the foundation wall, extending from the level of the top of the floor slab down at least 2" below finished grade, and in some cases as muc' as 12" below, depending upon type of insulation and construction, and condition of exposure. Chief value of the HHFA report lay in its recommendation of **four types of materials for insulating the slab edges:**

1. Cellular glass, which should be coated with pitch or asphalt to prevent surface deterioration when subjected to moisture and freezing;

2. Glass fiber, preferably in the form of coated board;

[1] *R. S. Dill, W. C. Robinson, H. E. Robinson,* BMS 103, Measurements of Heat Losses from Slab Floors, National Bureau of Standards. Available from *Supt. of Documents, U. S. Gov't Printing Office, Washington 25, D. C. Price 10 cents. See also P/A September 1945, p. 99*

[2] *C. D. Niven and A. D. Kent,* Report on "Panel" or "Radiant" Heated Test Buildings, *National Research Council of Canada, Ottawa, Canada. December 1947. Price 25 cents*

[3] *A. B. Algren, Assoc. Prof.; Head, Dept. of Heating, Ventilating, and Air Conditioning, University of Minnesota, Minneapolis, Minn.* Ground Temperature Distribution, with a Floor Panel Heating System; Heating, Piping & Air Conditioning, *May 1948, p. 111*

[4] *Research being conducted and evaluated by the University of Illinois, Urbana, Ill.*

[5] *An excellent summary of the HHFA report appears in* Heating and Ventilating, *July 1948, p. 74*

1

2

Photos courtesy Zonolite Co.

3

Steps in constructing an insulated, radiant-heated floor slab: *Fig. 1* (top), insulating vermiculite concrete poured on top of moisture barrier, which is visible at right of photo. *Fig. 2*, radiant heating piping placed on top of insulating concrete. *Fig. 3*, hard concrete applied over insulating slab and piping.

Photos courtesy Reynolds Metals Co.



Figure 4

Figure 5

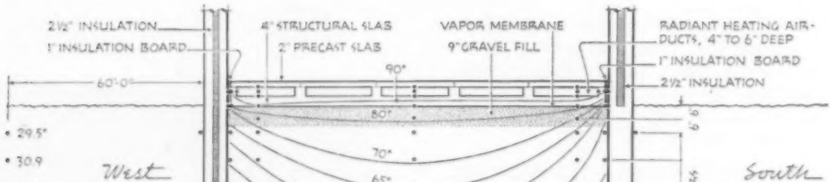

Figure 6

***Figs. 4 and 5,* from "Report on Panel or Radiant Heated Test Buildings" (National Research Council of Canada) show subgrade temperatures on Feb. 20, 1947. According to the "Report," insulation is essential at the angle between radiant-heating slab and foundation; and bottom of slab should be insulated where greatest heat loss occurs: for several feet back from its exposed edges. Also, contact between slab and foundation is preferably insulated. *Fig.* 6 shows similar conditions for a hot-air radiant-heated slab tested at University of Minnesota by Prof. A. B. Algren; data are for Mar. 4—Apr. 1, 1947. In addition to substantiating the Canadian Council's findings Algren stresses insulating the slab from the foundation and suggests instead of insulating footing walls, making insulation integral with slab or applying it between slab and fill. *Fig.* 7 shows Canadian Council's suggestion for construction.**



Figure 7

3. **Cane or wood fiber board,** coated with pitch or asphalt (this material not recommended by HHFA for locations subject to considerable moisture);

4. **Hard cellular rubber,** coated with pitch or asphalt.

ACTUAL LOSS TO SOIL MEASURED

In contrast to the preceding, recent work at the National Research Council of Canada and the University of Minnesota was based upon radiant-heated slabs, and was conducted with thermocouples placed at regular intervals down to 6'-0" below grade before the slab was constructed. **Figs. 4, 5, and 6,** show the temperatures recorded and **indicate the quantity of heat lost directly through the slab** as well as through exposed slab edges. The isobars in these figures also indicate the combination of edge-loss and vertical loss which make up the total heat loss, even when the slab edges are insulated. **Fig. 5** shows an insulated slab. Note in this case that the temperature immediately beneath the slab is 65F; whereas in **Fig. 4,** which shows an uninsulated construction, temperature at approximately the same point is 82.5F — a difference of 17.5F. This difference represents heat delivered by the radiant-heating system (in these cases, circulating hot water) which was wasted in heating the soil. **Fig. 6** shows a hot-air radiant system in uninsulated construction. Here the heat loss is apparently greater than for the uninsulated hot-water-heated slab, but since conditions of test were not exactly comparable, exact comparisons of results cannot be drawn. However, the results are quite similar.

The shape of the isobars tends to substantiate the earlier findings of NBS in one respect: heat loss at exposed slab edges is evidently much greater than in the center of the slab, or at edges protected by adjacent construction. However, loss through the center of the slab is certainly not negligible.

ADVANTAGES OF INSULATION

Is soil a good insulator? Possibly, if the ground is perfectly dry for a depth of several feet under a building. Often this is not the case, particularly in certain seasons. Wet, even damp, soil is a good conductor of heat. Of course, heating the soil will tend to offset its gain of water—at the expense of the heating system!

Another factor often overlooked is the effect on heat loss of bedrock or stone under the foundation. "Build your house on rock," but before doing so, consider that rock is a good conductor of heat, and that in such cases the need for insulation under the floor is greatly magnified.

In buildings where it is the practice to heat only on certain days of the week, allowing the temperature to drop for the balance of the period (churches,

schools, and offices which are used only on weekdays, etc.) it is desirable to have a floor system with a minimum heat capacity. Otherwise, too much time and too many Btu's are required to bring up the temperature when it is needed; and when the controls no longer call for heat, the Btu's stored up in and beneath the slab continue to heat the structure above. Furthermore, this capacity of floor and ground to absorb large quantities of heat is not conducive to maximum efficiency of the temperature control system. In regions of mild climate (or in spring and fall) where only a few hours of heat are required each day, a high-heat-capacity floor causes an override of temperature into the warmer part of the day when heat is not required. A low-heat-capacity floor—that is, one insulated from the ground, among other things—obviates this and reduces the "time lag."

High-heat-capacity floors have a further undesirable feature in climates having abnormally high humidities, particularly in the summer. The concrete in contact with the ground is relatively cool, and frequently moisture condenses on the floor surface, damaging floor coverings. Dampness on concrete floors is more often due to moisture from the air than from the ground. No amount of waterproofing beneath the slab will prevent this trouble. When the slab is insulated from the ground, its surface tends to follow air temperatures much more closely and is seldom below the temperature at which condensation begins to take place.

Where radiant heating exists in the slab, because of the necessarily higher temperature of the slab, heat losses downward are aggravated. It has been found here again that faster response is obtained with thermostatic controls where the radiant-heating panel is insulated from the ground.

REQUIREMENTS OF AN INSULATION

An insulating medium used under floors built on the ground must meet certain requirements:

1. Good insulating value;
2. Structural strength or rigidity;
3. Permanence against deterioration, vermin, etc.;
4. Economy;
5. Low heat capacity.

One material that meets all these requirements is vermiculite insulating concrete. When vermiculite aggregate is mixed with Portland cement, a lightweight concrete is produced which, like ordinary stone concrete, is rot- and vermin-proof; and also of high insulating value. One inch of this insulating concrete is equivalent to more than 16 inches of ordinary concrete in heat transmission. In the proportions of aggregate to cement commonly used, the load-bearing strength is more than adequate.

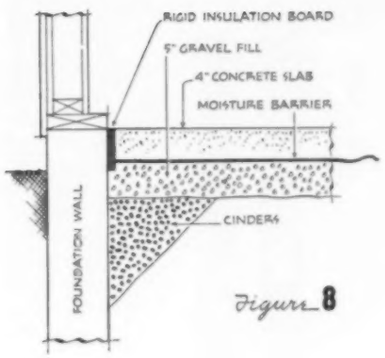

Figure 8

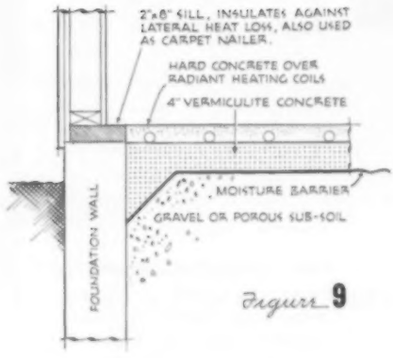
2"x8" SILL, INSULATES AGAINST LATERAL HEAT LOSS, ALSO USED AS CARPET NAILER.
HARD CONCRETE OVER RADIANT HEATING COILS
4" VERMICULITE CONCRETE
MOISTURE BARRIER
GRAVEL OR POROUS SUB-SOIL
FOUNDATION WALL
Figure 9



Figure 10



Figure 11

Fig. 8 shows one method of slab-on-grade construction suggested by National Bureau of Standards in BMS 103, published in 1945. *Figs. 9, 10, and 11* show methods of employing an insulating slab with vermiculite aggregate. Moisture barrier is laid over a weak mix of concrete, or, better, a dry mix of cement and sand, wet with a light spray to hydrate and set the cement, to prevent fill beneath from puncturing the membrane. For the insulating slab, a mix of 6 cu ft of vermiculite to one of Portland cement is used. This procedure has been employed at a 110-unit housing project in Dearborn, Mich.; in dormitories at Bowling Green College, Bowling Green, Ohio; and several other installations.

In addition to the methods of insulating with vermiculite concrete and fill shown in Figs. 8 through 12, there are, of course, other materials suitable for floor slab insulation: cellular glass, cork, glass fiber, etc. Some of these may demand the type of precautions noted in the extracts from the report of the Housing and Home Finance Agency contained in the text; and methods of construction will likewise vary. In any case, principles derived from Figs. 4, 5, and 6 are basic.

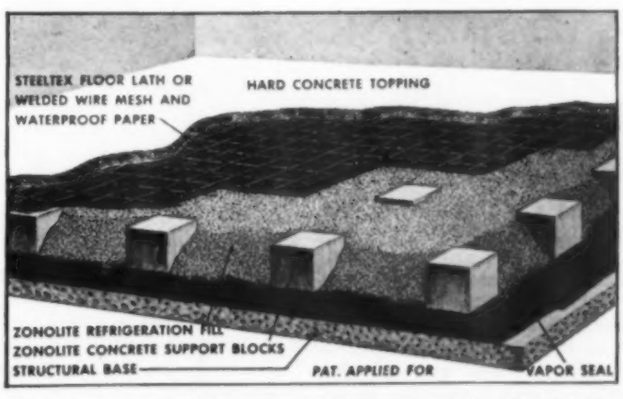

Fig. 12, floor for cold storage buildings patented by Zonolite Co., Chicago, Ill. Precast, 8-in. vermiculite concrete blocks are placed on top of a vapor seal, 24 in. on centers. Space between is filled with vermiculite refrigeration fill. Paper-backed wire mesh is placed, and a load-carrying slab is poured. Subsoil must be well drained, preferably with 12 in. or more of gravel beneath the vapor barrier.

Products

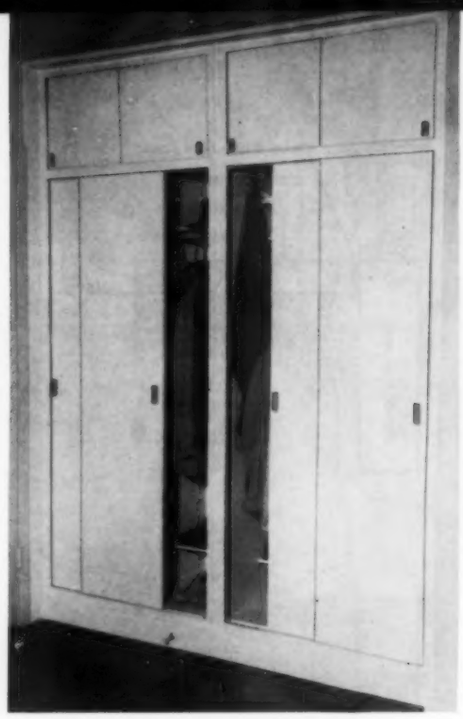

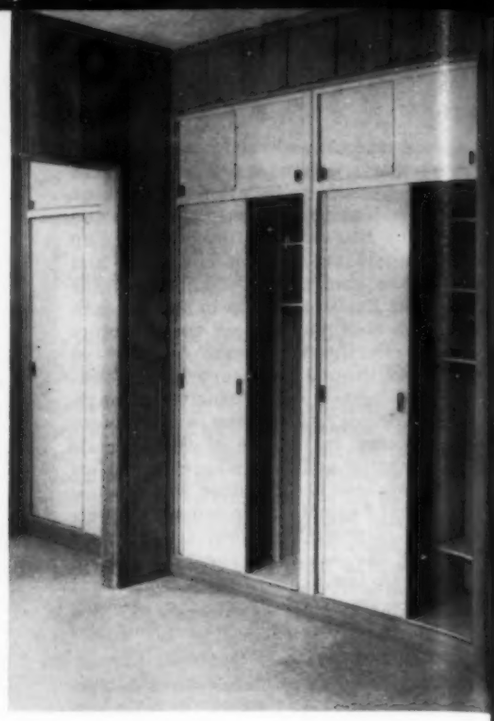

Left, Cabinet-Wall installed in house of Carroll A. Towne, Vienna, Va.; Stanley P. Stewart, designer. *Right*, in house designed by Robert W. Bolwell, White Oak, Md.

CABINET-WALL **Prefab Closets and Closet Fronts**

Prefabricated closets and fronts for closets which are used to replace conventional wall and closet construction, or may be installed against walls, have been developed by Milton Lowenthal, Washington architectural designer. Manufactured by Mengel Co., Wood Products Div., Winston-Salem, N. C., and distributed locally by their inventor through Milo Products Co., Washington 6, D. C., *Cabinet-Wall* units are lower in cost than similar prefab units and are easy to install.

The units have wood frames and laminated wood walls, floors, doors, and shelves. Hardware is aluminum and stainless steel. Front frames (also the separate *Closet Fronts)* are mortised and tenoned and shipped assembled. Remainder is shipped knocked-down; assembly for Type A (shown in drawing) is estimated to take a carpenter and helper 45 minutes. All parts are shipped prime-coated, for job painting. When back wall of unit is to be concealed, it may be of hardboard.

Complete closets come 2, 3, and 4 ft wide; closet fronts, 4 ft wide only. For installation, after assembly, closets abutting bearing walls are screwed to studs or battens; successive units are screwed or bolted to each other. Adjoining partitions, door casings, etc., can be screwed or bolted to the cabinets at any point. The closets can provide clothes hanging and storage space equivalent to ordinary stud and plaster construction at savings of 25 to 40 percent in floor area; they save construction time, may be used to form partitions, and may be shifted when household requirements change.

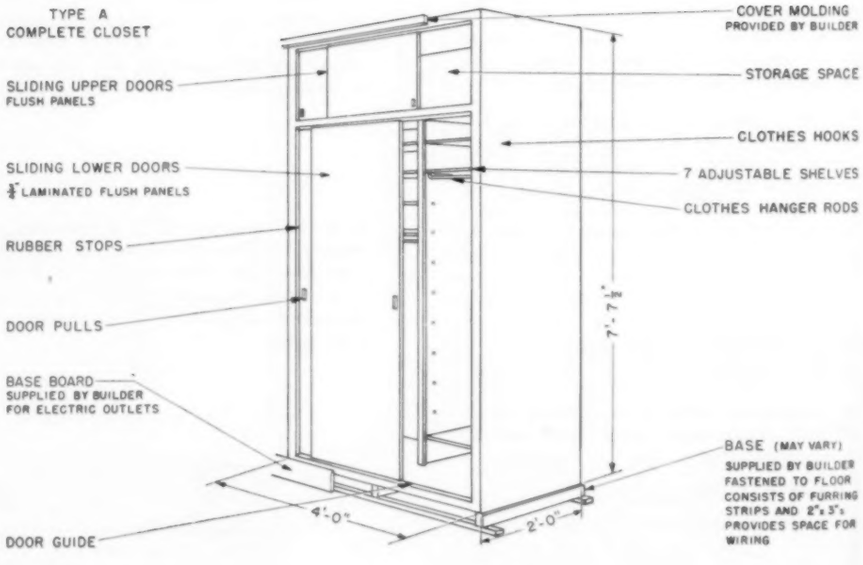

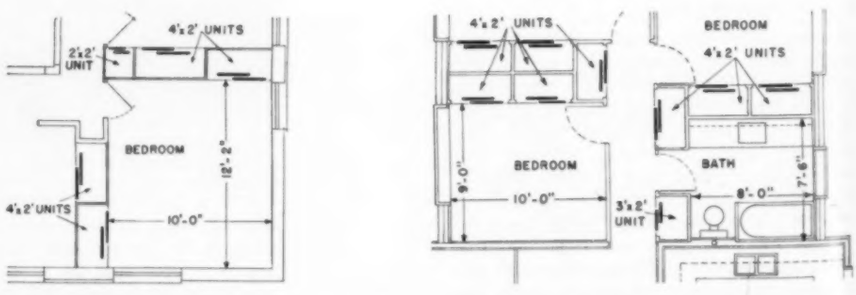

Plans show versatility of units as used in houses in Fairfax Co., Va.; *left*, Alexander Richter, architect; *right*, Charles M. Goodman Associates, architects.

THIS MONTH'S PRODUCTS

AIR AND TEMPERATURE CONTROL

Plug-in Clock Thermostat: 110v motor eliminates need of basement transformer and five-wire cable through walls to thermostat location. Minneapolis-Honeywell Regulator Co., 2753 4th Ave., Minneapolis 8, Minn.

Convector Radiators: new line features curved outlet grille, hand adjusted temperature control damper, removable front panel for easier installation and cleaning. Four standard enclosure styles; three, in heavy duty institutional line. Modine Mfg. Co., De Koven Ave., Racine, Wis.

CONSTRUCTION

Corrugated Aluminum Sheet: for structural use as roofing and siding. Deep corrugation (⅞") strengthens sheet and provides greater load capacity; weighs only 56 lbs per sq 100 ft, a considerable reduction over conventional industrial roofing. Several sheet sizes available. Reynolds Metals Co., 2500 So. 3rd St., Louisville, Ky.

DOORS AND WINDOWS

Combination Storm and Screen Door: all aluminum, weighing 36 lbs. Screen panels interchangeable with glass panels for winter use. Rustproof, non-warping. Kick plate spot welded on lower section. Eagle-Picher Co., American Bldg., Cincinnati, Ohio.

Tutch-Latch: concealed latch eliminates bulky hardware; touch on door panel releases catch to permit button type compression spring to swing open door. Easily installed on doors, cabinets, drawers. Phillips Tutch Latch Co., 40 Exchange Pl., New York, N. Y.

ELECTRICAL EQUIPMENT AND LIGHTING

Luminous Safety Signs: phosphorescent signs and markers to point to exits, fire escapes and equipment, first aid stations; serve as ordinary signs in daylight. New Jersey Zinc Co., 160 Front St., New York, N. Y.

Solarite Panel Luminaire 12,000 Series: shallow fixture body formed from sheet steel finished in baked white enamel. Light transmission approximately 65%. May be installed individually or in continuous rows flush mounted, or suspended. Also exit fixtures with broad light distribution, easily read letters. Solar Light Mfg. Co., 1357 So. Jefferson St., Chicago 7, Ill.

One-Watt Night Light: walnut-sized, for dark hallways, steps, etc. For use on 110-125v a-c. Average life of one year. Westinghouse Electric Corp., 306 Fourth Ave., Pittsburgh 30, Pa.

FINISHERS AND PROTECTORS

Tub-Tite: resin-based plastic caulking recommended for sealing cracks between tile walls and bathtubs, washstands, shower stalls, and the like. Applied directly from tube, will adhere to glass, wood, tile, metal, brick, and concrete. American Fluresit Co., Inc., 635 Rockdale, Cincinnati 29, Ohio.

Mirrofilm: new plastic gloss finish protects metal surfaces, linoleum, painted wood. Applied easily, dries quickly. Wype Corp., 2214 Dolman St., St. Louis, Mo.

INSULATION (THERMAL, ACOUSTIC)

Elasto-Rib: laminated rubber-cork material for vibration and noise control. Available in one in. thick sheets up to 24" x 36" in size. Recommended loading between 7 and 21 lbs psi. Korfund Co., Inc., 48-15 32nd Pl., Long Island City 1, N. Y.

Insulation Wool: line of mineral wool blankets and batts, granulated and pouring wool, and loose material for use in building construction and insulation. K. B. S. Mineral Wool Co., 3rd & Pierce Sts., Omaha, Neb.

PLASTICS

Tenite II: cellulose acetate butyrate available in new clear transparency; gives more color accuracy when combined with lacquers. Tennessee Eastman Corp., Kingsport, Tenn.

SANITARY EQUIPMENT, WATER SUPPLY, DRAINAGE

Flagg-Flow: threadless bronze fittings for brazing to copper alloy or brass tubing or pipe. For use in domestic plumbing, also on meter and instrument lines, boiler feed lines, and other industrial applications. Stanley G. Flagg & Co., Inc., 1421 Chestnut St., Philadelphia 2, Pa.

SPECIALIZED EQUIPMENT

"Ten-Twenty" American Universal Desk: for improved classroom seating. Top adjustable to three positions for different requirements. Swivel chair, designed for correct posture, adjusts to fit any occupant. Desk top, seat, constructed of strong plywood, in natural finish or school brown. American Seating Co., 901 Broadway, N. W., Grand Rapids 2, Mich.

Cambrite House Numbers: black numerals permanently sealed under white glaze on clay tile. Will not fade or tarnish. Black japanned aluminum frames also available in sizes holding from one to five numbers; suitable for numbering building projects, sheds, power lines, etc. Cambridge Tile Mfg. Co., Dept. 14, Cincinnati 15, Ohio.

Quartzoid Ceiling Sprinkler: claimed to give maximum effectiveness in fire protection. Concealed piping; only deflector and Quartzoid bulb show below ceiling level. Temperature has only to reach 135F (30F lower than rating for conventional fusible sprinklers) to burst bulb, release water to extinguish fire. Grinnell Co., Inc., 260 W. Exchange Pl., Providence, R. I.

SURFACING MATERIALS

Amerwood: new pre-finished, low cost paneling. Special manufacturing process removes portion of spring growth and increases surface tension of hard summer growth. Boards are then sanded, pigment and protective coating applied, followed by a wax and buff. Pine, oak, chestnut, and other woods used; available in convenient sizes. Lehwood Corp., 1003 Ironwood Dr., South Bend, Ind.

***Left,* new Industrial Corrugated Aluminum sheet has ⅞" deep corrugations which enable it to support safely 35 lb per sq ft at 6-ft span, 106 lb at 42 in.; conventional corrugated aluminum supports a maximum of 12.5 or 37.5 lb at same spans. Stock size is 33¾ in. by 5 to 12 ft long. Accessories (straps, closures, rivets, bolts, etc.) are available. Reynolds Metals Co., Louisville, Ky. *Center,* "Ten-Twenty" Balanced-Posture Desk for classrooms has top adjustable to 20° slope, 10°, or level. Developed to implement current school lighting theories, desk has natural wood top to reduce glare; reflectivity, 35 to 50%. Other features similar to "Universal" desks. American Seating Co., Grand Rapids 2, Mich. *Right,* new convector-radiator line available in four standard and three heavy duty enclosure models, modularly dimensioned. Temperature control damper, adjustable, completely conceals grille when closed. Front panel is easily removed for installation, cleaning. Modine Mfg. Co., Racine, Wis.**

Manufacturers' Literature

★ *Editors' Note: Items starred are particularly noteworthy, due to immediate and widespread interest in their contents, to the conciseness and clarity with which information is presented, to announcement of a new, important product, or to some other factor which makes them especially valuable.*

AIR AND TEMPERATURE CONTROL

1-190. How to Make the Yardstick Zone the Comfort Zone (Cat. 12), 23-p. illus. catalog on console oil-burning heaters designed to warm lower areas of rooms by means of radiation, circulation, and direct air movement. Advantages, specifications, special and standard features. Also line of accessories. Coleman Co., Inc.

★ **1-191. Johnson Automatic Temperature and Humidity Control,** AIA 30-F-2, 80-p. manual containing engineering data for design and application of automatic temperature and humidity control for heating, cooling, ventilating, and industrial processing. Covers various types of thermostats, dampers, valve regulators, switches, modulating devices, etc. Johnson Service Co.

1-192. Finned Coils, AIA 30 (Cat. 47A), catalog on coils for every air-conditioning requirement. Capacity ratings, sizes and dimensions, selective information, ordering directions, index. Kennard Corp.

★ **1-193. Advance Technical Data** (Bul. 248-A) (Form 010648M), 16-p. bulletin describing new line of convector radiators for houses, apartments, commercial and industrial buildings. Advantages, dimensions, technical information. Modine Mfg. Co.

1-194. 100 Fireplace Ideas, 31-p. booklet, including catalog sheet, on fireplaces of European, American Colonial, and modern design, constructed to circulate heat throughout the house. Also outdoor grilles, cranes, ash dumps, and other accessories. Advantages, illustrations, ordering specifications. Price Fireplace, Heater & Tank Corp.

1-195. Multi-Vent, AIA 30-J (Bul. 6510), 58-p. bulletin on a panel assembly, installed in ceiling, for air distribution in heating, ventilating, air conditioning. Descriptive and technical data, typical installations. Pyle-National Co.

1-196. Janitrol Heating Guide, AIA 30-B (Form QGP46-5-B KW2711), 7-p. bulletin on gas warm-air winter air-conditioning system. Simultaneously maintains temperature, moisture content, movement and quality of air, within space being heated. Diagrams, installations, specifications; index to other heating equipment. Surface Combustion Corp.

CONSTRUCTION

3-15. Modern Building Materials, AIA 10-C (Bul. 51), 4-p. folder on modular concrete building units and batch mixer. Drawings, sizes and dimensions. Besser Mfg. Co.

3-16. Erect and Strip Concrete Forms, two loose sheets on forms in which to place reinforced concrete. Advantages, application diagrams, comparative costs. Bulldog Concrete Forms, Inc.

3-17. Lith-I-Bar, AIA 4-E-6, 24-p. illus. booklet on a lightweight concrete joist, electrically welded reinforcing. Description, advantages, safe-loading tables, specifications. Lith-I-Bar Co.

3-18. Teco Trussed Rafters, 4-p. folder on application of trussed rafters to FHA section 608 projects. Technical and descriptive data. Timber Engineering Co.

DOORS AND WINDOWS

★ **4-139. Kennatrack,** AIA 27-A, 16-p. illus. bulletin on single, double sliding door tracks employing patented expansion plug door mount, which requires minimum head room. Also door frames, wardrobe units, sliding door cabinet latches and locks. Construction and installation details, advantages. Jay G. McKenna, Inc.

4-140. Whitco Sash Hardware, 4-p. illus. booklet on casement, transom, and awning type hardware. Details, recommendations. Vincent Whitney Co.

4-141. Thorn Windows (Cat. SA 48), 27-p. catalog on aluminum and steel windows, doors, jalousies, hardware. Section and detail drawings, sizes, dimensions, index. J. S. Thorn Co.

ELECTRICAL EQUIPMENT AND LIGHTING

★ **5-134. Bryant Wiring Devices,** AIA 31-C-7 (Cat. 48), 76-p. illus. catalog on complete line of wiring devices, including lampholders, plugs, starters, outlets, switches, breakers, etc. Photos, sizes and dimensions, wiring diagrams, index. Bryant Electric Co.

Two booklets, including four folders, on a wiring system to carry full powered electricity throughout a house, for all electrical needs. Layouts, requirements, general and detailed data. National Adequate Wiring Bureau:

5-135. The Private Life of Your Home.

5-136. Electric Wiring.

★ **5-137. Fluorescent and Incandescent Lighting,** AIA 31-F-2 (Cat. 747), 24-p. illus. catalog on ceiling light fixtures. Descriptions, dimensions, typical installations, cross sections. Neo-Ray Products, Inc.

FINISHERS AND PROTECTORS

6-130. Kay-Tite, loose specifications sheet for control of water seepage in porous masonry structures, by application of membrane coating. Kay-Tite Co.

6-131. Mercotone, 8-p. folder on oil paints; seven basic colors, which can be

(To obtain literature coupon must be used by 11/1/48

PROGRESSIVE ARCHITECTURE, 330 West 42nd Street, New York 18, N. Y.
I should like a copy of each piece of Manufacturers' Literature listed.

We request students to send their inquiries directly to the manufacturers.

No.	No.	No.	No.
No.	No.	No.	No.
No.	No.	No.	No.
No.	No.	No.	No.

Name

Position

Firm

Mailing Address ☐ Home ☐ Business

City State

PLEASE PRINT 9/48

HOW REVERE GETS THE FACTS ON RADIANT PANEL HEATING

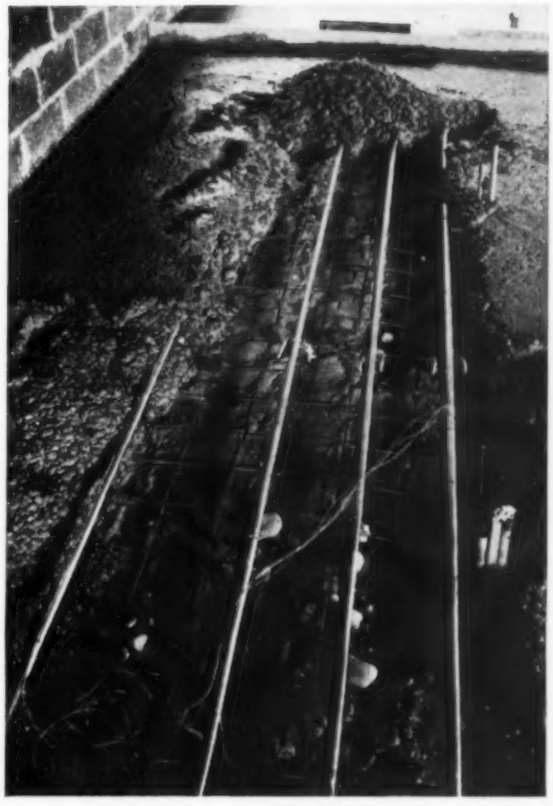

THE photograph above shows one of the test installations of radiant panel heating set up by Revere, in a building designed for continual occupancy, to develop practical information needed by architects and by engineers and contractors in the heating field. Taken as the concrete is being poured, it shows a three-tube grid type coil located in a concrete floor slab. The fourth tube (farthest left) is part of another three-tube grid type coil.

Note the wires that run across the tubes into the left hand corner of the photograph. These are thermocouple wires that are attached to the copper tube at 8-foot intervals in order to determine the reduction in temperature of the water as it travels through the tube. Additional thermocouples are used to determine temperatures within the concrete floor slab and on its surface at various points in the room. Ground temperatures under the slab have also been recorded.

Throughout the heating season, an installation like this one yields precise, valuable, operational data that are carefully recorded by Revere engineers. Then, this information, together with the results of other research projects, is given to architects, engineers and contractors in such Revere literature as "A Graphical Design Procedure for Radiant Panel Heating," "Radiant Panel Heating—A Non-Technical Discussion," and "Radiant Heat with Copper Tubing."

In all probability these books are now in your files. Be sure to refer to them whenever you need reliable data on the design or installation of radiant panel heating systems.

And be sure to specify Revere Copper Water Tube—readily available through leading distributors. This long-lasting, easy-to-bend tube is ideal for radiant panel heating. Remember—trouble always costs more than Revere Copper Water Tube.

REVERE

COPPER AND BRASS INCORPORATED

Founded by Paul Revere in 1801

230 Park Avenue, New York 17, New York

• • •

Mills: Baltimore, Md.; Chicago, Ill.; Detroit, Mich.; New Bedford, Mass.; Rome, N. Y. — Sales Offices in Principal Cities, Distributors Everywhere.

Manufacturers' Literature

blended into as many as 5,000 tints. Color chart, formulas for blends, advantages. M. J. Merkin Paint Co., Inc.

INSULATION (THERMAL, ACOUSTIC)

★ **9-99. Simplified Physics of Thermal Insulation,** 16-p. booklet describing reflective aluminum insulation, its thermal factors, and protection against condensation, vapor, vermin, mold, fire. Types, uses, installation directions, comparisons chart, thermal insulation values chart. Infra Insulation, Inc.

SANITARY EQUIPMENT, WATER SUPPLY, DRAINAGE

★ **19-245. Scott Washroom Advisory Service,** AIA 29-i, 40-p. booklet to aid architects in planning of industrial washrooms, including a recreation and game room. Typical layouts, elevations, illustrations of fixtures. Scott Paper Co.

SPECIALIZED EQUIPMENT

19-245A. Presenting the Seeburg (3-48-150M), 8-p. illus. brochure on a new musical system that will play 200 phonograph recordings, or 14 continuous hours of music, without repeating any selection. Radio programs can be arranged for week in advance to be played automatically on predetermined time cycle. Also paging facilities, broadcasting system for speeches, company programs. Descriptions, advantages, photos. J. P. Seeburg Corp.

19-246. Haertel (Cat. 84), 64-p. illus. catalog on storage vaults, cleaning equipment and materials, for garments and furs. General and detailed information, installations, cost analysis chart, cleaning instructions. Walter Haertel Co.

19-247. Automatic Fire Protection for Industry (1-1A 6-48 15M-AMP), 4-p. folder on built-in fire detecting and extinguishing systems using liquid carbon dioxide; planned for total flooding or local application. Description, advantages, typical installation. Walter Kidde & Co., Inc.

19-248. Look What's Cooking in Kitchens, 28-p. booklet on kitchen planning for new or remodeled houses. General, detailed data, from blueprint stage to final decoration. Illustrations, color selector. Midwest Mfg. Co. (25 cents per copy; make check or money order payable to Midwest Mfg. Co.)

SURFACING MATERIALS

19-249. Duracite, leaflet on new abrasive cement, claimed to eliminate slipping and tripping hazards on worn stairways and uneven floors; will form solid bond with slate, marble, concrete, wood, etc. Uses, advantages. Duane Specialties, Ltd.

★ **19-250. What is Kimpreg?** (KGD-3), 8-p. folder on a new wear-resistant plastic sheet impregnated with phenol resin, bonded to exterior grade plywood at time of plywood's manufacture. Unaffected by rain or snow, oils, alcohols, ketones, etc. Advantages, general information. Kimberly-Clark Corp.

19-251. Wallpapers of Lasting Beauty, leaflet containing nine reproductions of wallpaper designs, both domestic and imported. Descriptions. W. H. S. Lloyd Co., Inc.

TRAFFIC EQUIPMENT

20-235. No More Steps (366-10M-7-48), 16-p. booklet on various types and arrangements of residential elevators, electrically and manually operated; also an electrically operated seat for transportation up and down stair flights. General Information, photos, index. Sedgwick Machine Works, Inc.

REVIEWED AUGUST '48

AIR AND TEMPERATURE CONTROL

1-187. Control for Hot Water Heating (F-3157), Barber-Colman Co.

1-188. Merrill Wind Tunnel Tests, C. R. Gelert Co.

1-189. Rempe Engineering Data Book (Form 547-3MO), Rempe Co. ($1.50 per copy. Make check or money order payable to Rempe Co.)

CONSTRUCTION

3-8. Tomorrow's Silhouettes Today (Form DD-136), W. E. Dunn Mfg. Co.

3-9. Zourite (SF-7105), The Kawneer Co.

3-10. An Introduction to Pluswood, Pluswood Inc.

3-11. Precast Gypsum Roof Decks, AIA 4-E-6, U. S. Gypsum Co.

3-12. Metal Lath, AIA 20-B, U. S. Gypsum Co.

3-13. Roof Decks, AIA 4-L, U. S. Gypsum Co.

3-14. Rocklath Plaster Bases & Attachment Systems, AIA 20-B-2, U. S. Gypsum Co.

DOORS AND WINDOWS

4-138. Aetna Steel Door Frames (Form 5-50M-1-48), Aetna Steel Products Corp.

ELECTRICAL EQUIPMENT AND LIGHTING

5-129. Some Ideas, General Lighting Co.

5-130. Commercial Lighting Units (Cat. G-34), General Luminescent Corp.

5-131. Guthlite, Edwin F. Guth Co.

5-132. Design for Electrical Living (B-3979), Westinghouse Electric Corp.

5-133. "Sky-Glo" Luminous Louver System, AIA 31-f-14 (AD 5491), Benjamin Electric Mfg. Co.

FINISHERS AND PROTECTORS

6-127. Hy-Toner, Hy-Toner Div., Roberts Paint Corp.

6-128. Heavy Duty Finishes for Maple Flooring, Maple Flooring Manufacturers Ass'n.

6-129. Floor Facts, Vestal, Inc.

INSULATION (THERMAL, ACOUSTIC)

9-97. Kaylo Roof Tile (KBI-485-5M), American Structural Products Co.

9-98. Armstrong's Insulating Wool (T D-11-546), Armstrong Cork Co.

MATERIALS OF INSTALLATION

13-72. Brune's Gutter Hanger, Holder and Fastner, Louis J. Brune, Sr.

PLASTICS

16-117. Resins and Plastics (J-547a), Bakelite Corp.

SANITARY EQUIPMENT, WATER SUPPLY, DRAINAGE

19-235. Modern Design for Shower Time, The Perfix Co.

19-236. FA-3 Disposall (30-95), General Electric Co.

19-237. Forced Hot Water Circulation (Form FCE 648), H. A. Thrush & Co.

19-238. Pumps, Yeomans Bros. Co.

SPECIALIZED EQUIPMENT

19-242. Decorative Uses of Copper and Brass (Feb. 1948), Copper & Brass Research Ass'n.

19-243. Parsons Pureaire Kitchen, AIA 23a-15 (Form SA-1027), The Parsons Co.

19-244. Architect's Manual of Engineered Sound Systems, AIA 31-1-7 (Form 1R2134), Engineering Products Dept., Radio Corp. of America. ($5.00 per copy. Make check or money order payable to Radio Corp. of America.)

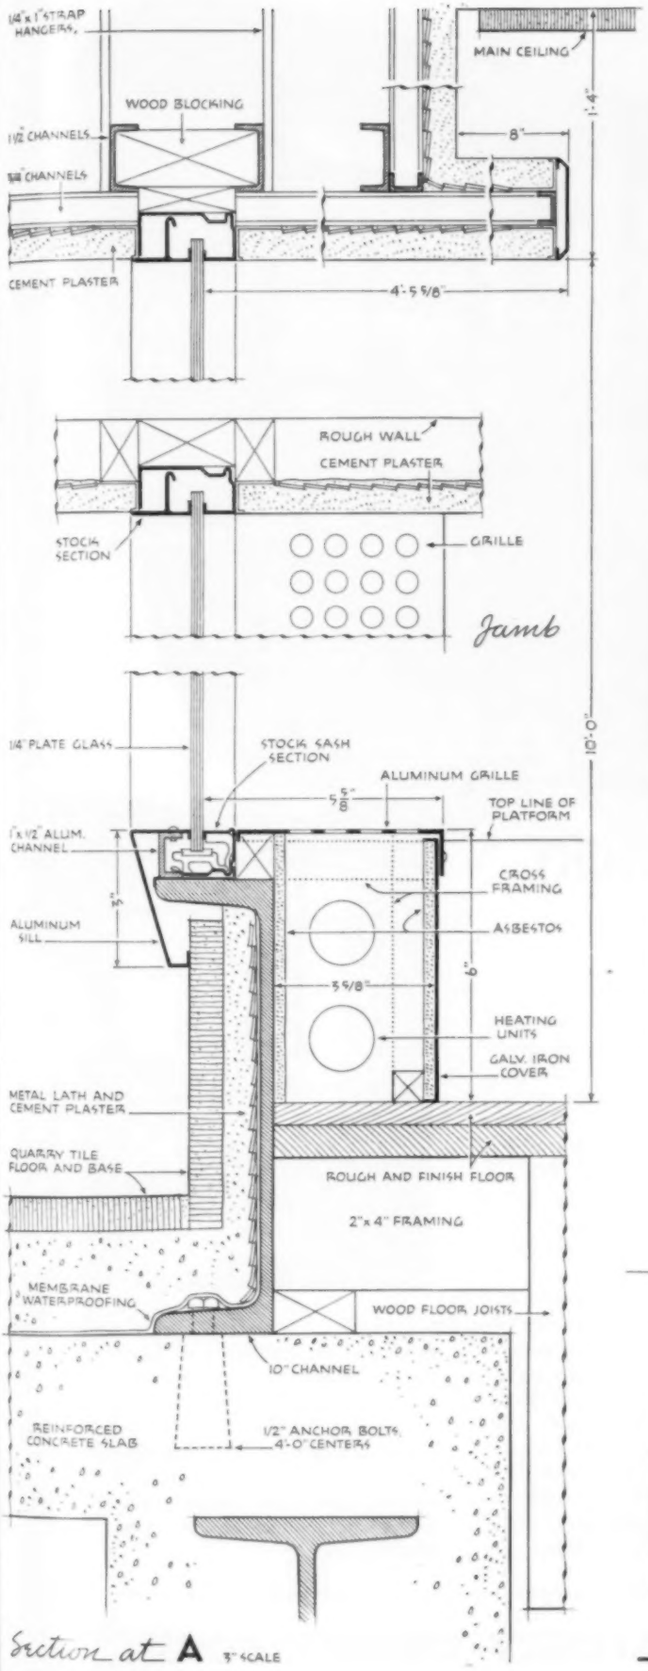

Bra Schnall

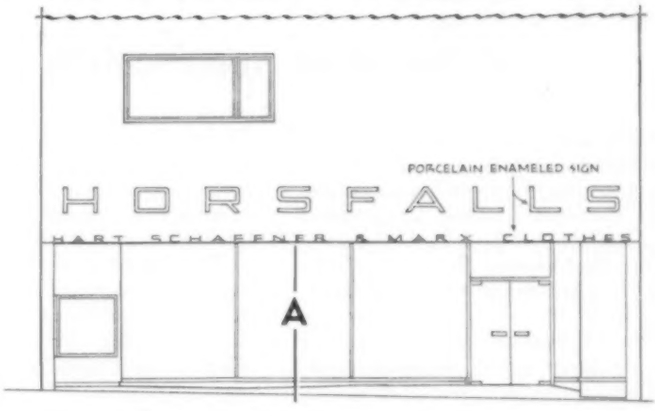

Front Elevation

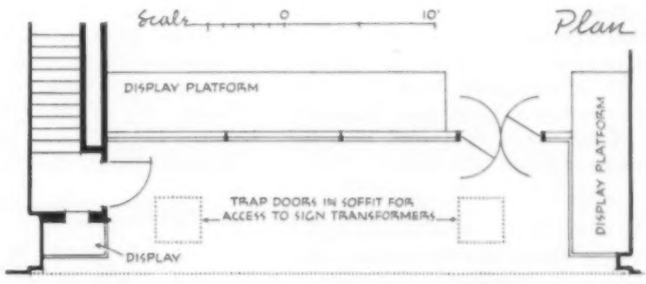

HORSFALL'S

Hartford, Conn.

KETCHUM, GINA & SHARP

Architects

ADD DAYLIGHT-ASSURE COMFORT

in the same specification

*Thermopane** enlarges your design opportunity—enables you to provide generous daylight-transmitting areas without making concessions on comfort or heating economy. Thus, *Thermopane* fits neatly into today's pattern of more daylight, more comfort.

The *Thermopane* unit consists of two or more panes of glass, with specially-cleaned, dehydrated air between, sealed around the edges by L·O·F's *Bondermetic* (metal-to-glass) *Seal**. This prevents dirt or moisture from entering the insulating air space.

Thermopane's low coefficient of heat transfer (U value of .58 for double *Thermopane* with ½″ air space) reduces heat loss through the glass, saves fuel and reduces downdrafts at windows. With *Thermopane* there's little chance of condensation forming on the glass under average conditions . . . making it easier to maintain proper humidity for health and comfort.

The benefits of *Thermopane* are enjoyed the year 'round, for its insulating qualities also help keep rooms cooler in summer . . . aid efficient operation of air-conditioning equipment.

Thermopane is available for prompt delivery from your L·O·F Distributor in more than 70 standard sizes as well as units of special dimensions. It may be installed in either fixed or opening sash. For complete information, write for our *Thermopane* book and Technical Sheets by Don Graf. Libbey·Owens·Ford Glass Company, 3698 Nicholas Bldg., Toledo 3, Ohio.

● Glazed throughout with *Thermopane*, Drexel School, Cicero, Illinois, provides ample daylight with more comfort in all classrooms. Because *Thermopane* deadens sound, it is practical for partitions. Stairways daylighted with a generous glass area of *Thermopane* are safer, less drafty. Architects and Engineers: Perkins and Will, Chicago.

*Ⓡ

Only Libbey-Owens-Ford makes

Thermopane

LIBBEY·OWENS·FORD

a Great Name in **GLASS**

STORE: STAIR RAIL

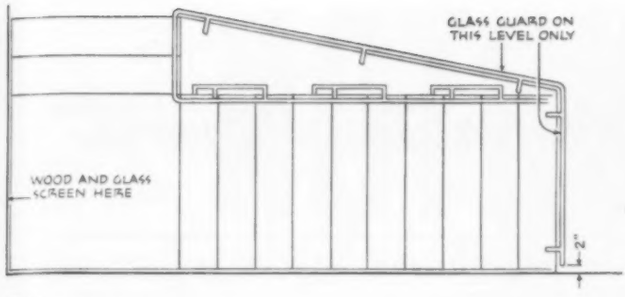

Plan 1/4" SCALE

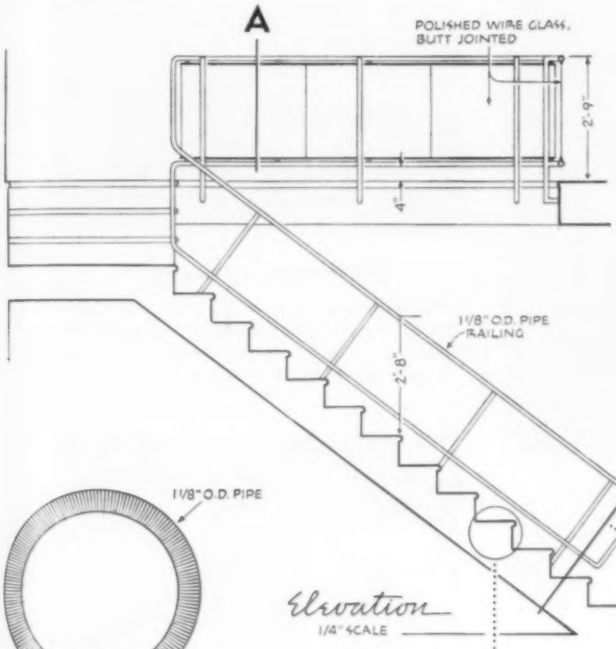

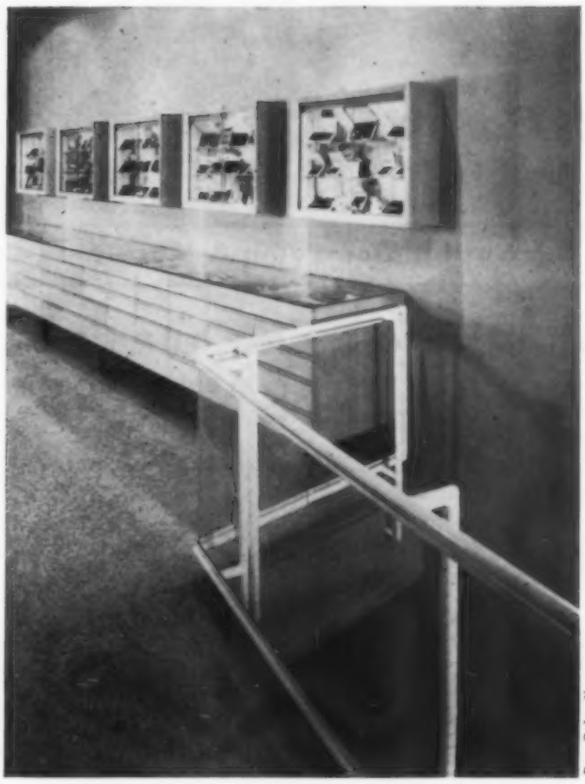

Bra Schnall

Elevation 1/4" SCALE

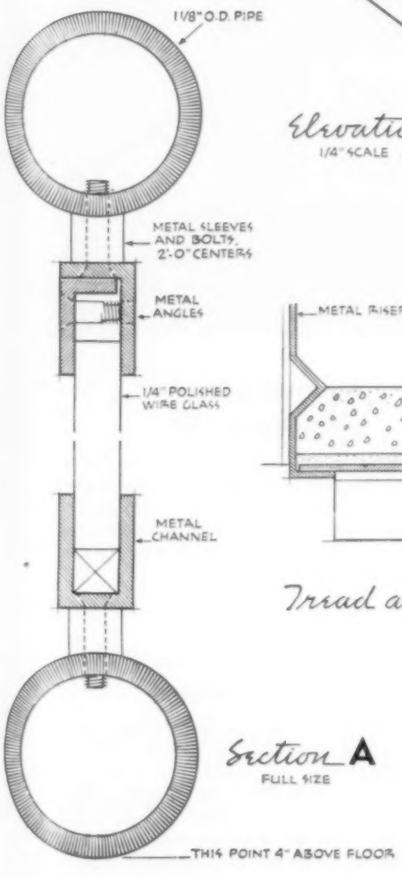

Section A FULL SIZE

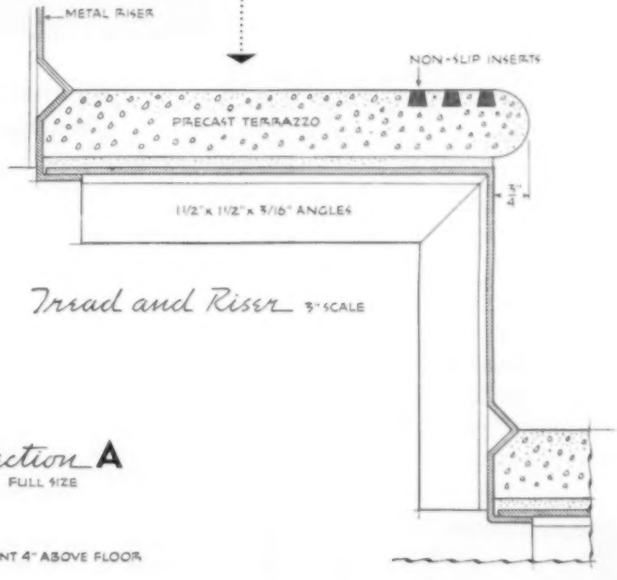

Tread and Riser 3" SCALE

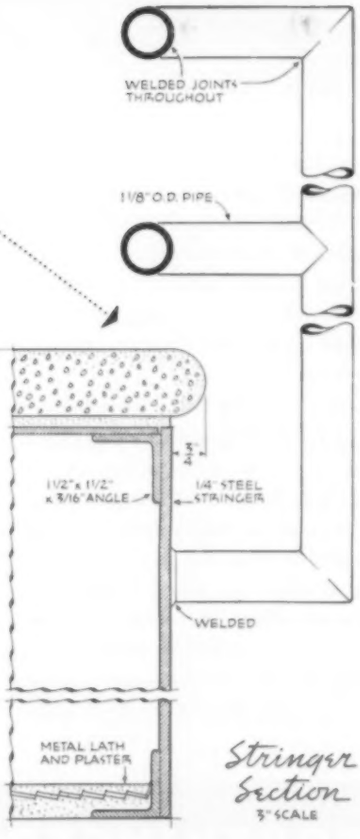

Stringer Section 3" SCALE

FINLAY STRAUS

Stamford, Conn.

KETCHUM, GINA & SHARP

Architects

WORTHINGTON

Air Conditioning and Refrigeration Report

Worthington Pump & Machinery Corporation, Harrison, New Jersey

LESS FRICTION AND TURBULENCE LOSS IN "VOLUTE" COMPRESSOR DESIGN

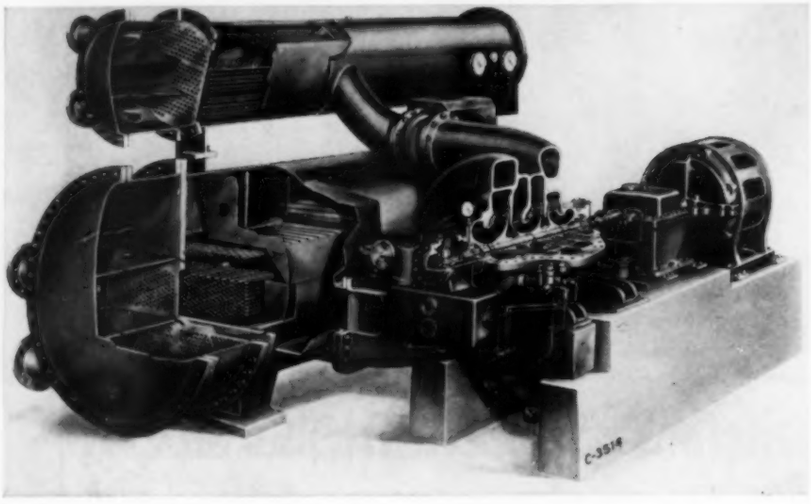

The use of "volutes" in the design of the centrifugal compressor which forms a part of the Worthington Centrifugal Refrigeration System provides greater efficiency because the smooth, obstruction-free gas passages reduce friction and turbulence loss.

An exclusively "Worthington" arrangement of the volute passages results in virtual elimination of radial thrust. In the first compression stage, a double volute balances any normally-developing radial thrust; in the second and third stages, the volutes are offset 180 deg. to counterbalance the radial thrusts.

Similarly, the arrangement of impellers is such that the axial thrust produced by the third-stage impeller substantially counterbalances that developed by the first- and second-stage impellers.

Other features include:

Auxiliary motor-driven oil pump provides pressure in bearings and shaft seal before starting and stopping.

Wheels are cast, rather than fabricated, for shaping to proper hydraulic design.

Write us for Bulletin C-1100-B14, giving further information. *Worthington Pump and Machinery Corporation, Harrison, N. J. Specialists in air conditioning and refrigeration for more than 50 years.*

Worthington at Firestone

The Research Laboratory in the huge Firestone Tire and Rubber Company at Akron, Ohio, is air-conditioned by Worthington equipment.

Windowless Store—Worthington Air

A 540-ton Worthington Centrifugal Refrigeration Machine, mounted on a structural steel base in a rooftop penthouse, provides year-round air conditioning for Burdine's Department Store at Fort Lauderdale, Florida.

Balanced Air—For Small or Large Installation

Whether it's a 540-ton centrifugal machine for a big building like Burdine's, or a 3-ton packaged unit for a corner drug store, the same fact holds true. Because Worthington makes *all* the vital "innards" of air conditioning and refrigeration systems, the customer gets a *completely-integrated*—not just *assembled*—system. And that means more efficient, more economical operation—*more worth in Worthington.* See your nearby Worthington distributor (in the Classified Telephone Book) for details. A.8.32

WORTHINGTON *Air Conditioning and Refrigeration*

STORE: DISPLAY WALL

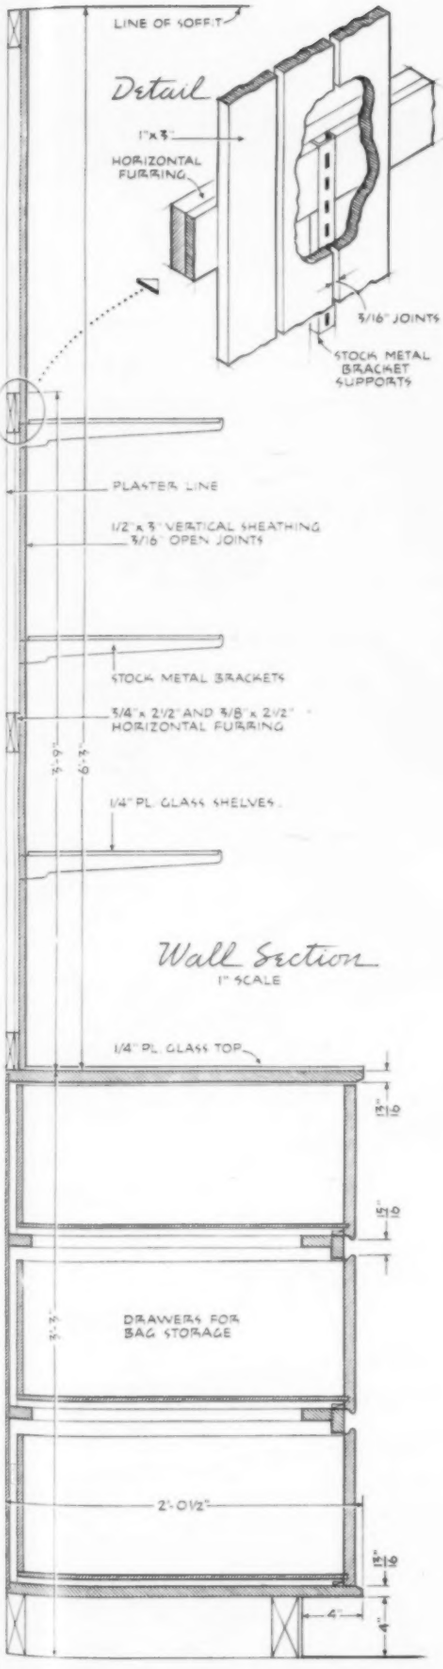

Lionel Freedman: Pictorial Service

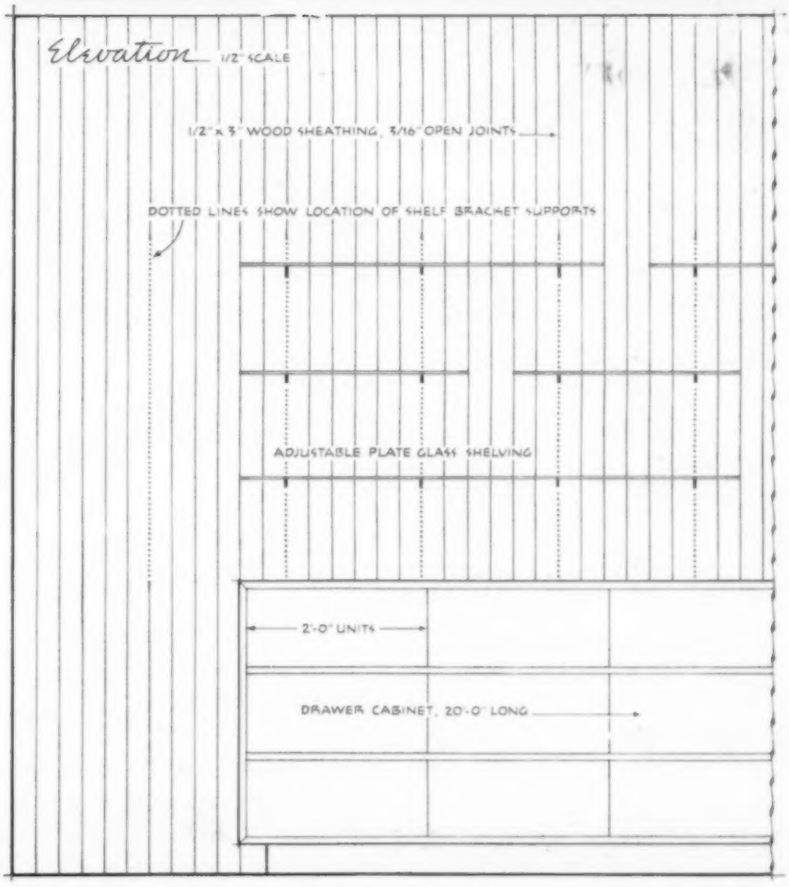
Elevation 1/2" SCALE
1/2"x 3" WOOD SHEATHING, 3/16" OPEN JOINTS
DOTTED LINES SHOW LOCATION OF SHELF BRACKET SUPPORTS
ADJUSTABLE PLATE GLASS SHELVING
2'-0" UNITS
DRAWER CABINET, 20'-0" LONG

PLYMOUTH SPECIALTY SHOP

New York, N. Y.

KETCHUM, GINA & SHARP

Architects

Why OPEN-WEB

In construction products **CECO ENGINEERING**

STEEL JOISTS ?

. . . Because for light-occupancy buildings that are fire and sound resistive, Open-Web Steel Joist Construction is the most economical way to build

Building men throughout the country are making greater use of Open-Web Steel Joists for construction of light-occupancy buildings such as commercial structures, stores, schools, dormitories, hospitals, apartments and residences. The reasons: The cost is low, the construction is light, and the resulting building is fire and sound resistive, termite proof and non-shrinking. The "dead load" is amazingly low—less than forty pounds per square foot with a two-inch concrete top slab and a plastered ceiling. This light weight reduces the size of footings, columns and beams.

WHY SPECIFY CECO?

Thirty-six years of construction experience in the field, on the job, has given Ceco a sure grasp of building problems. This fund of knowledge is yours to command from 23 strategically located offices and warehouses coast-to-coast. Ceco Steel Joists are designed and fabricated in accordance with the standard specifications of the Steel Joist Institute and simplified recommendation R94-30 of the United States Department of Commerce. They are fabricated to exact size in the factory, come to the job tagged, ready to install.

CECO STEEL PRODUCTS CORPORATION

GENERAL OFFICES: 5601 West 26th Street, Chicago 50, Illinois

Offices, warehouses and fabricating plants in principal cities

See Ceco catalogs in Sweet's Architectural File or send for free descriptive literature

CECO STEEL

makes the big difference

FASTER—Ceco Open-Web Steel Joists are light and easy to install. Special equipment and falsework are unnecessary. This results in speedy erection and minimum interference with other building trades on the job.

ECONOMICAL—Ceco's Open-Web Steel Joists are self-centering. The form work for the concrete slab—usually metal rib lath or steeltex—rests directly on the steel joists without other support from the under side.

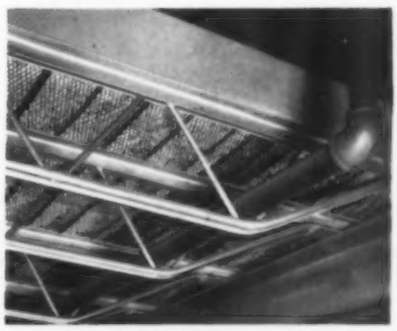

CONCEALS CONDUITS—Ceco Open-Web Steel Joists provide a ready means of concealing ducts, wiring and piping. Space is saved by direct attachment of ceiling to joists. Time and materials are saved, too.

Partial List of Ceco Products

METAL RESIDENCE CASEMENTS • INDUSTRIAL WINDOWS AND DOORS • METAL FRAME SCREENS • ALUMINUM FRAME STORM WINDOWS • ALUMINUM COMBINATION STORM WINDOW AND SCREEN UNITS • METAL LATH AND ACCESSORIES • STEELFORMS • REINFORCING BARS • STEEL JOISTS AND ROOF DECK • HIGHWAY PRODUCTS • CORRUGATED ROOFING AND ACCESSORIES • VENTILATORS

ELECTRUNITE E.M.T.

. . . Chosen for New $2,000,000 Office Building in Atlanta, Ga.

● Nearing completion, the new 800 Peachtree Building in Atlanta is the second largest office building in the city. Of steel frame construction, with concrete floors and solid masonry exterior walls, this six-story structure contains 160,000 square feet of floor area.

Among the modern features of the building are complete air conditioning of all office space, almost total absence of excavations and basements, new lightweight construction, *and wiring raceways throughout of Republic ELECTRUNITE E.M.T.*

The builders believe it will be the safest building in Atlanta, since the exit facilities and fire protective features exceed the minimum requirements of the State Building Safety Law which is patterned after the National Exits Code.

Here, again, is convincing evidence of the dependable wiring protection provided by ELECTRUNITE E.M.T.—the *original* lightweight rigid steel wiring raceway. This *modern* conduit is approved by the National Electrical Code for exposed, concealed and concrete installations . . . Underwriters Laboratories' inspection assures you that it provides adequate electrical and mechanical protection.

For complete information about the many cost-cutting advantages of Republic ELECTRUNITE E.M.T., write *today*.

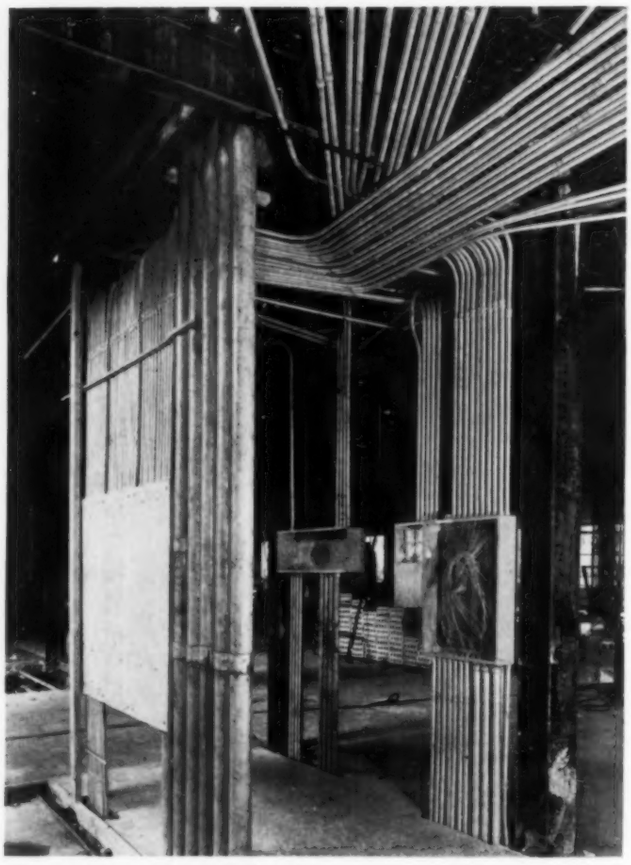

Photo of 800 Peachtree Building during construction, showing mass runs of ELECTRUNITE E.M.T., the modern threadless rigid steel wiring raceway used throughout the entire structure. Architect: Herbert Rawlins, Atlanta. Electrical Contractor: Whitehead Electric Company, Atlanta.

REPUBLIC STEEL CORPORATION
STEEL AND TUBES DIVISION • CLEVELAND 8, OHIO
Export Department: Chrysler Building, New York, 17, New York

SEE SWEET'S FILE
or write us for detailed information on these Republic Steel Building Products:

Pipe—Sheets—Roofing
Enduro Stainless Steel
Toncan Enameling Iron
Electrunite E.M.T.
Fretz-Moon Rigid Steel Conduit
Taylor Roofing Ternes
Berger Lockers, Bins, Shelving
Berger Cabinets for Kitchens
Truscon Steel Windows, Doors, Joists and other Building Products

Republic
REPUBLIC STEEL
ELECTRUNITE E.M.T.

LIGHTWEIGHT THREADLESS RIGID STEEL RACEWAY

...and for fluorescent lighting I insist on

Certified Ballasts!

You're wise, too, when you insist on Certified Ballasts.
That's one way to assure—

- **Full rated lamp life**
- **Quiet operation**
- **Long, dependable performance**
- **Full rated light output**

Certified Ballasts are better because they are built to rigid specifications that assure high performance—then are tested, checked and "certified" by impartial Electrical Testing Laboratories, Inc.

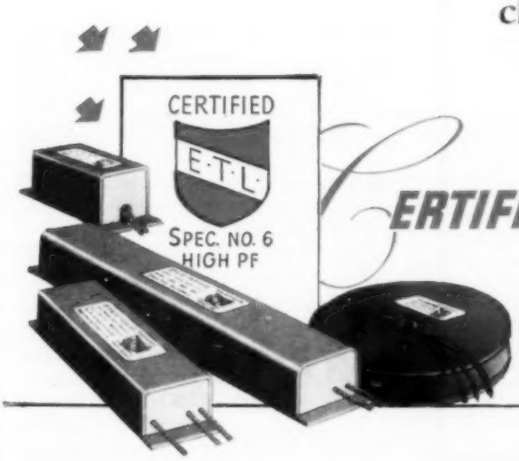

CERTIFIED BALLAST MANUFACTURERS

Makers of Certified Ballasts for Fluorescent Lighting

2116 KEITH BLDG., CLEVELAND 15, OHIO

FROM THE TECHNICAL PRESS

By JOHN RANNELLS

FROM OTHER PUBLICATIONS

New Architecture of Transport. *Some recent work by the Architect's Office of the London Midland Region of the British Railways, by J. L. Martin.* The Architect's Journal, *Queen Anne's Gate, Westminster SW1, England. Apr. 8, June 3, 1948.*

All the regions of the nationalized British railroads have tremendous programs of reconstruction. These richly illustrated articles describe in considerable detail the range of problems in terms of the Midland region, formerly the L.M.S. Railway, The program is long-range, with continuous work in canteens and hostels for railway workers, stations of all sizes and types, and "industrial" design of station equipment and rolling stock interiors.

The continuous nature of the work makes it possible to develop planning standards and standardized components. Application of dimensional coordination to construction and planning makes it feasible to change building components as building materials become available and to take advantage of mass procurement without sacrificing flexibility in planning.

Station planning is based on studies of actual use of the different parts, which varies greatly with the types of stations, as indicated by the following table:

		Terminal Station	Interchange Station
Proportion of passengers using facility	Ticket Office	30%	4%
	Indicator	62%	21%
	Book Stalls	50%	16%
	Waiting Rooms	10%	20%
	Toilets	15%	19%
	Refreshments	20%	52%

The largest station problem for some time to come (and most interesting to the public) is remodeling—not merely renovation, but adaptation of sound existing structures to present-day needs by provision of better layout, accommodation, and equipment; replacing or removing redundant areas, resulting in improved efficiency and appearance.

Standards in School Equipment. The Architects' Journal, *Queen Anne's Gate, Westminster, SW 1, England. June 10, 1948.*

An excellent series of concise articles on: structural problems, noise and acoustics, lighting, internal finishes, heating, sanitary equipment, kitchens, furniture and equipment, and costs, with an excellent bibliography of work published since 1942.

Structural systems are discussed mainly on the basis of cost. Increasing use is being made of prestressed concrete, joists fabricated from light-gage strip steel, and sheet steel box forms which

(Continued on page 108)

The INNER SANCTUM
... Without Mystery

THE picture above shows a partial view of our inner sanctum. Of unusual design, it's a showpiece of the art of wood fabricating.

There's no mystery about the excellence of the work that went into our inner sanctum. In fact, Bergen's capabilities in wood fabricating is no mystery to many of America's biggest firms and best known architects.

What it requires to translate the latest design—plus—merchandising plan into tangible, enduring form is supplied by Bergen in satisfying measure at all times.

There's no mystery about our "aged in the wood" craftsmanship and experience . . . but it's awfully comforting to have them working for *you!*

Write for our Portfolio of "Jobs Well Done". It's worth seeing.

Bergen-sure the success of your modernization program with

BERGEN CABINET

Architectural woodwork that makes the designer's plan an enduring reality

1552-56 BERGEN STREET, BROOKLYN, N. Y. • Phone: PResident 2-3121

How the Mercury Switch helps you plan a better wiring job

It's a 10-ampere, 125-volt, T-rated switch. This rating answers the demand made by today's heavy loads. The mercury switch is equal in interrupting capacity to the best specification-grade switches. And, it carries the Underwriters' Laboratories approval — another indication of proved reliability and sound construction.



It has a silent, smooth action. Silent operation is an easily demonstrated plus value that makes it a natural for all modern wiring specifications. Because conventional blades have been eliminated, there is no contact click. A hermetically sealed "mercury-button" actuates the make-and-break at the flick of a finger.



It will last for a long, long time. Because there are fewer moving parts to wear out, the mercury switch cuts switch maintenance. A newly designed, modern handle identifies the switch, and makes it possible to point to a specific feature of the wiring system that is modern—up-to-date.

It's part of the complete G-E wiring line. Everything needed for a wiring installation is available from the full General Electric line of wiring devices. When you plan your next electrical specifications, remember that the General Electric name signifies long life and reliable service to every user. Clients know it is visible evidence of top quality on every job. Why not specify General Electric wiring materials throughout, and let the best-known name in electricity go to work for you.

For more information on the General Electric Wiring Materials line, write for a copy of *Wiring Materials Digest*. Just address Section D24-969, Construction Materials Department, General Electric Company, Bridgeport 2, Connecticut.

GENERAL ELECTRIC

Reviews

(Continued from page 106)

become part of the reinforcement and eliminate form work. Lightweight concretes are widely used to cut down loads.

Transmission of noise through windows is given as the chief offender, to be seen clearly in section though not always apparent in plan, and to be offset by baffling. Compulsory use of gym shoes is suggested to eliminate one of the greatest noise sources. Acoustic correction in corridors and classrooms helps, of course, to make noise less obtrusive. There is an interesting comment on the difficulty small children have in making themselves heard in the "grown-up" school hall. A proper children's theater or at least a modified classroom with stage is the answer.

Suggestions on lighting follow up-to-date practice in this country. The article on heating stresses loss through windows and suggests shuttering them to diminish losses while the school is not in use—about 75 percent of the time.

Child-sized sanitary equipment is considered essential. (For children two to five: 7"-high waterclosets, 16"-high wash basins.)

School furniture has been pretty much taken for granted, with good design rare. Only by client-architect-manufacturer teamwork can furniture and equipment be entirely successful. Lightness and flexibility are stressed today, compared to the old cast-iron-based fixed desk, which was more notable for its durability than for its comfort or usefulness. The article on furniture and equipment contains this excellent statement on standards generally: "*. . . emphasis on the necessity for standards does not mean standard specifications as we know them but the publication of basic information on standards of function and quality which alone can guide the designer, leaving him free to make his own interpretation.*"

The Utilization of Building Research. The Architects' Journal. *Queen Anne's Gate, Westminster, SW 1, England. June 24, 1948.*

Discussion led by F. R. Yerbury, participated in by a research chemist, a builder, a construction foreman, and architects in public work and private practice. The chief complaint was that published research material is not put in terms useful on the job—particularly that new methods are not sufficiently clarified for the foremen and mechanics. More clear details are required for economical construction with new materials or technics. One suggestion was that we may have to develop a whole new group of people who can render scientific work into clear language.

This was the first of a series of discussions on topics of vital interest to architects. It comes at a time when the (British) government has started an inquiry into the organization and efficiency of building operations. A paragraph in the June 10 issue of the *Journal* notes that the National Federation of Building Trades Employers considers that the government's decision "will create uncertainty and destroy confidence." The Building Trade Workers, on the other hand, welcome the inquiry.

American Review. *Mark Hartland Thomas.* Architectural Design. *26 Bloomsbury Way, London, W.C.1, England. June 1948.*

Mr. Thomas is much intrigued by the disregard for "elevations" which he observes in some of the best of our recent domestic work. It's tough on the editors of architectural journals when so many architects begin producing houses that don't photograph "because they refuse to be bothered with elevations—those consciously styled two-dimensional pattern studies."

(Continued on page 110)

Specify Flexwood

FOR DISTINGUISHED DESIGNS

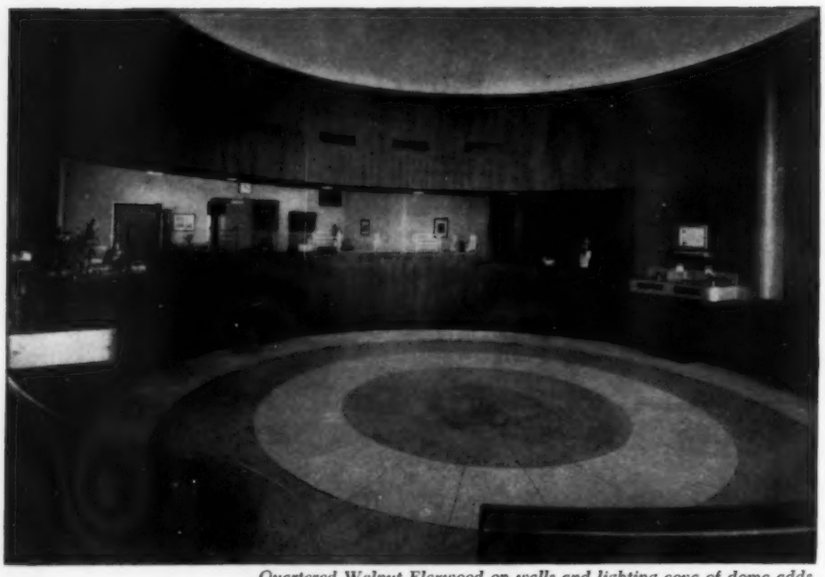

Quartered Walnut Flexwood on walls and lighting cove of dome adds a welcome to the main banking room of the Midtown Savings and Loan Association, Newark, N.J. Frank Grad & Sons were the architects.

Design with Flexwood. You can create a wide variety of interesting interiors with this modern decorative material.

You get all the warmth and luxury of the world's finest woods . . . plus the versatility so important in today's designs.

For Flexwood is *real* wood. Selected and matched veneers of fine cabinet hardwoods . . . domestic and imported . . . are firmly mounted on a *flexible* fabric backing.

Use it on curved surfaces or flat . . . in homes or offices . . . for modern or traditional interiors. It goes up quickly over any smooth, firm wall surface, old or new. No expensive construction necessary.

Get full details on Flexwood. Write, today, for specifications and samples.

UNITED STATES PLYWOOD CORPORATION

Dept. F, 55 West 44th Street, New York 18, N. Y.

Flexwood and Flexglass are manufactured and marketed jointly by United States Plywood Corporation and The Mengel Company.

On the main banking floor, above, the richness of the bronze and marble grille surmounting the long tellers' desk is enhanced by semi-indirect lighting reflected from ceiling of gold leaf.

•

Simple, massive handrails of extruded bronze add a note of elegance to the stairway from the building lobby to the banking floor.

Closeup of grille forming the tellers' windows in main banking room. The gate is also of bronze.

Bronze

Provides the New Look... preserves the old dignity

RENOVATION of the Erie County Savings Bank in Buffalo, N. Y., presents an excellent example of the effectiveness of Anaconda Architectural Bronze in modernizing interiors without violating traditional atmosphere or time-honored prestige.

Architects for this project were Duane Lyman and Associates, Buffalo, N. Y. The general contractor was George W. Walker & Sons, Inc., of Buffalo. Both interior and exterior bronze work was executed by Superb Bronze & Iron Co. Inc., Brooklyn, N. Y.

Here, as in so many other banking institutions, public buildings, department stores and smart shops, both architect and fabricator confirm important advantages of Anaconda Architectural Bronze and Nickel Silver . . . ready workability, and uniformity in dimension, composition and finish. 4819

ANACONDA
From mine to consumer

Anaconda

ARCHITECTURAL BRONZE

THE AMERICAN BRASS COMPANY

General Offices: Waterbury 88, Connecticut

Subsidiary of Anaconda Copper Mining Company

In Canada: ANACONDA AMERICAN BRASS LTD., *New Toronto, Ont.*

Different businesses— but all agree: Speed Pays!

Hotels use Air Express regularly when guests leave something behind. Costs little and brings guests back again! *Speed pays.*

Traffic managers know the fastest possible way to ship is by Air Express—and they use it regularly. *Speed pays.*

Radio transcriptions make up a big portion of Air Express traffic. Stations and talent agencies know *speed pays.*

Speed pays in your business, too!

Air Express is the fastest possible way to supply the speed that's so essential when things are moving fast. Shipments go on every Scheduled Airline flight. Even coast-to-coast service overnight! Special pick-up and delivery service at no extra cost. *Low* rates: 12 lbs. goes 1600 miles for $5.89; 23 lbs. for only $11.30. Phone local Air Express Division, Railway Express Agency, for fast shipping action.

- Low rates—special pick-up and delivery in principal U.S. towns and cities at no extra cost.
- Moves on all flights of all Scheduled Airlines.
- Air-rail between 22,000 off-airline offices.

AIR EXPRESS

GETS THERE FIRST



Rates include pick-up and delivery door to door in all principal towns and cities

AIR EXPRESS, A SERVICE OF RAILWAY EXPRESS AGENCY AND THE

SCHEDULED AIRLINES OF THE U.S.

Reviews

(Continued from page 108)

It is a very interesting and healthy development, with architecture ceasing to be the means of showing off the architect's individuality and becoming again a sympathetic background to a way of living. Mr. Thomas suggests that this "decay of the elevation" means that the public is at last beginning to make the right demands of the architects and we can now get on with the main job of getting them cheaper and better buildings.

How to Insulate Concrete Floors. Heating and Ventilating, *148 Lafayette St., New York 13, N. Y. July 1948.*

Suggestions based on a report by Lawrence Shulman, mechanical engineer, adviser to the technical staff of the Housing and Home Finance Agency. An abstract, really, of the report printed in the November 1947 HHFA Bulletin (reviewed in the February 1948 P/A), reprinting the same excellent drawings and recommendations. Thicknesses of insulating materials vary with design temperatures and are increased 50 percent where floor heating is used.

How to Care for Condensation. *T. W. Reynolds.* Heating and Ventilating, *July 1948.*

Sketches showing method of collecting moisture at glass areas and how to prevent condensation on structural steel from exterior walls.

Some Problems I've Met in Radiant Heating. *T. Napier Adlam.* Heating, Piping & Air Conditioning, *6 N. Michigan Ave., Chicago 2, Ill. June 1948.*

The author has met plenty of problems in his very extensive experience in this field. In most cases he finds "that the major troubles arise from faulty design brought about by inexperience, or by the acceptance of incorrect statements." Of the actual faults which affect the occupant the most frequent are high floor temperatures and (believe it or not) drafts.

Examples of the facts of radiant heating installations are very pointed and well illustrated.

ASHVE Research Program. Heating, Piping & Air Conditioning. *June 1948.*

Two major studies are under way: on cooling load (evaluation of all factors involved in calculations of cooling load for comfort and process air conditioning) and on heat flow through glass (investigation of heat flow through glass areas, whether by direct transmission or absorption and reradiation of radiant energy, or by conduction and

(Continued on page 112)

Ernest Eagle points with pride . . .

. . . and you'll point with pleasure,
when you sharpen a TURQUOISE. Its long-seasoned cedar shaft
cuts like butter. Its super bonded lead is firmly welded to the wood.
And its *Electronic graphite is so finely ground and highly compressed
that it readily takes a long-tapered point on the sandpaper block.

TURQUOISE
has other Fine Points, too.

Its grading is uniformly accurate.
Its point *stands up* when you bear down.
Its lead is *smooth* as smooth can be. And its
lines are so opaque they reproduce perfectly.

Make a point of trying TURQUOISE.
Write Ernest Eagle for a free sample,
naming this magazine, your dealer,
and the grade you want.

* Reg U S Pat Off

10¢ *EACH . . . less in quantities.*

EAGLE "CHEMI-SEALED"
(SUPER BONDED)
TURQUOISE
DRAWING PENCILS AND LEADS

EAGLE PENCIL COMPANY, 703 E. 13th St., New York 9, N. Y.
Eagle Pencil Company of Canada, Ltd., Toronto

PLANNED LIGHTING WITH WILEY RECESSED TROFFERS

Wiley Recessed Troffers in unusual patterns

Wiley stock model Recessed Troffers provide custom-made results both in lighting requirements and flexibility of arrangement to fit any architectural plan *without* custom-made costs.

Wiley Recessed Troffers Combined with "Spots" in continuous runs.

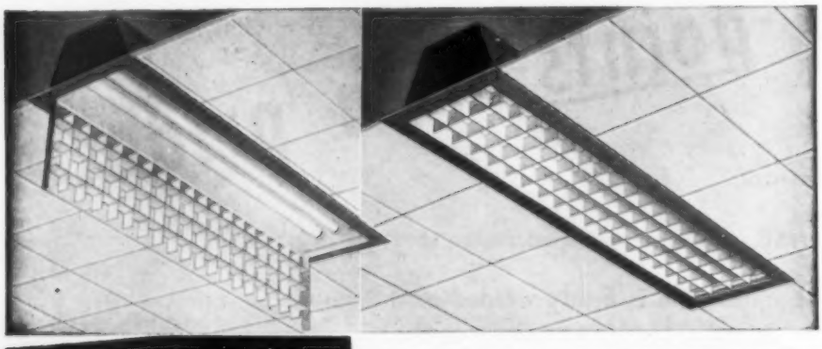

Only Wiley has the
E-Z SERVICER
Pat. #2427084

One-man service . . . No Tools. Raise one side, slide sideways and drop open. Unhook to completely remove.

FEATURES, UNIVERSAL UNIT:

- Adaptable to any position.
- Individual or continuous runs or patterns.
- Open, louvered or glass.
- May be combined with Wiley Spots.
- 2, 3 or 4 lamps—Starter or Instant Start.
- Underwriters Approved.
- I.B.E.W. Label

Other WILEY Fixtures:

NIAGARA FLEUR-O-LIERS: 2, 3, 4 or 6 lamps, louvered or glass bottoms. May be suspended from or mounted flush to ceiling, singly or in continuous runs.

NIAGARA BEAM: 2, 3, or 4 lamps, louvered or glass. Flush to ceiling — Singly or continuous runs.

SPOTS: Adjustable or fixed lens. May be used individually or combined with Wiley Commercial or Troffer models.

INDUSTRIAL FLUORESCENTS: Complete high quality line, open, louvered or glass bottoms.

R. & W. WILEY, INC.

Dearborn at Bridge Street — Buffalo 7, N.Y.

Reviews

(Continued from page 110)

convection and the significance of these effects in problems of space cooling and heating loads). Programs completed and in progress are tabulated, with listing of the research bulletins already published. *ASHVE Research Bulletin No. 1*, still on the press, gives us the right start with glass: "Review and Critical Analysis of Published and Unpublished Data on Heat Transmission through Glass."

In this same issue of the magazine is published the second paper on Solar and Total Heat Gain through Double Flat Glass, by Geo. V. Parmelee and Warren W. Aubele. The first paper (single flat glass) was published in the January issue.

REPORTS

Lighting Practices for Stores and Other Merchandising Areas. *Report of the Committee on Store Lighting of the Illuminating Engineering Society.* Illuminating Engineering, *51 Madison Ave., New York 10, N. Y. June 1948. Reprints 50 cents*

This report occupies nearly the entire issue (95 pp) and covers this extensive field remarkably well. The committee was expected to prepare a "recommended practice" but concluded that the great variety and continually changing patterns in store lighting prevent development of standardized requirements or design methods. The emphasis in the report is therefore placed on the principles of attractively presenting the merchandise to the shopper.

The principles of attractive lighting, paramount in store work, are important in any design where appearance is a consideration. The explanations of factors that influence seeing (size, brightness, color, etc.) and descriptions of various lighting systems are put as concisely and clearly as possible, covering a great number of specific problems of display, including luminous signs and illumination of exterior sales areas.

Appendices cover current recommended practice in levels of illumination, lamps and luminaries, current lighting practices for merchandising areas (8-page chart), color, data on lighting showcases and shelves and downlighting, a glossary of terms and definitions, and an extensive bibliography of reference material from many publications.

A landmark in lighting, most useful to architects. Available in reprint from the Society.

(Continued on page 114)

FOR GREATER EFFICIENCY

in light and power distribution, more and more industrial plants are changing over to Plugin Ⓕ Busduct because . . .

It's More Flexible! Plugin Ⓕ Busduct provides a ready power source for new or old machinery anywhere along the line . . . and permits a quick change in plant layout without disrupting production.

It's More Economical! Plugin Ⓕ Busduct eliminates costly temporary connections and long, expensive lead-ins; greatly reduces maintenance costs and voltage loss.

It's More Efficient! Plugin Ⓕ Busduct saves time in the installation and relocation of machinery and day-to-day maintenance of the electrical system.

Available in standard 10-foot sections, Plugin Ⓕ Busduct provides convenient plugin outlets every foot of the way for Ⓕ Shutlbrak, Ⓕ Klampswitchfuz or Ⓕ Circuit Breaker Plugin Units. Busduct capacities: 250 to 1000 amps., 575 volts AC or less.

For more details, see your nearest Ⓕ Representative (he's listed in Sweet's) or write for Busduct Bulletin No. 701.

FA TRADE MARK

Frank Adam Electric Co.

ST. LOUIS 13, MISSOURI

Makers of BUSDUCT • PANELBOARDS • SWITCHBOARDS • SERVICE EQUIPMENT • SAFETY SWITCHES • LOAD CENTERS • QUIKHETER

For "extra beauty" in Slabs
...ATLAS WHITE CEMENT

You'll note added beauty in Architectural Concrete Slabs made with a matrix of Atlas White Cement. It brings out *full* sparkling whiteness or sets off rich color values in pigments and aggregates. And the crisp, smart appearance of the slabs lasts, undimmed, through years of wear and exposure.

Atlas White Cement also provides beauty and utility for Stucco, Terrazzo and Cement Paint, as well as Slabs. Such a matrix has the uniform clarity to complement the desired colors, whether in contrast or blend.

Atlas White conforms with ASTM and Federal specifications for portland cement. It has the same advantages for concrete and is used in the same way. Atlas White concrete stays fresh, colorful... and it cleans easily. Maintenance costs are low.

For further information on the uses of Atlas White Cement, see SWEET'S Catalog, Section 4B/2 and 13B/8, or write to Atlas White Bureau, Universal Atlas Cement Company (United States Steel Corporation Subsidiary), Chrysler Building, New York 17, N. Y.

PA-C-24

FOR BEAUTY AND UTILITY
ATLAS WHITE CEMENT
FOR TERRAZZO, PAINT, SLABS, STUCCO

"THEATRE GUILD ON THE AIR"—*Sponsored by U. S. Steel Subsidiaries*
Sunday Evenings—September to June—ABC Network

Reviews

(Continued from page 112)

PAMPHLETS

HHFA Technical Papers. *No. 7: Physical Properties and Fabrication Details of Experimental Honeycomb-core Sandwich House Panels. No. 9: Some Properties of Paper-Overlaid Veneer and Plywood. Housing and Home Financing Agency, Washington 25, D. C.*

Work done at the Forest Products Laboratory, Madison, Wisconsin. No. 7 describes construction and physical properties of the panels used for building a test structure for study of performance. No. 9 concerns itself with dimensional stability and abrasion resistance obtained by other coatings. Ordinary kraft paper impregnated with 10 to 15 percent resin is used for core and overlays, resulting in very stable and vapor-resistant panels.

The test structure is detailed so as to study various basement conditions and several types of panel construction for long-term exposure. Radiant heating pipes pressed into the core during the gluing operation will heat the structure.

BOOKS

NEW HOUSES FROM OLD

R. R. Hawkins and C. H. Abbe. McGraw-Hill Publishing Co., Inc., 330 W. 42nd St., New York 18, N. Y. 558 pp., 6" x 9", illus., bibliog., index. $4.95

A wealth of information for the prospective owner-remodeler to pore over. Not so much for the architect, although the coverage of detail is remarkably extensive. A great deal of the information and the excellent illustrations is that supplied by the various trade associations (Copper & Brass Research, National Lumber Manufacturers, etc.).

Even though the subtitle calls it "a guide to the planning and practice of house remodeling," the best of the book is on renovations. Not that the authors' planning advice isn't good, as far as it goes, but their "encyclopedia" is better. A comprehensive bibliography adds a great deal to the book's value.

RADIANT HEATING

Richard Woolsey Shoemaker. McGraw-Hill Publishing Co., Inc., 330 W. 42nd St., New York 18, N. Y. 306 pp., 6" x 9", illus., index. $4.00

There is already an extensive literature on radiant heating but very few books that give such a clear picture of the subject as this one. Profusely illustrated, it covers a great variety of installations, heating plants, control sys-

(Continued on page 116)

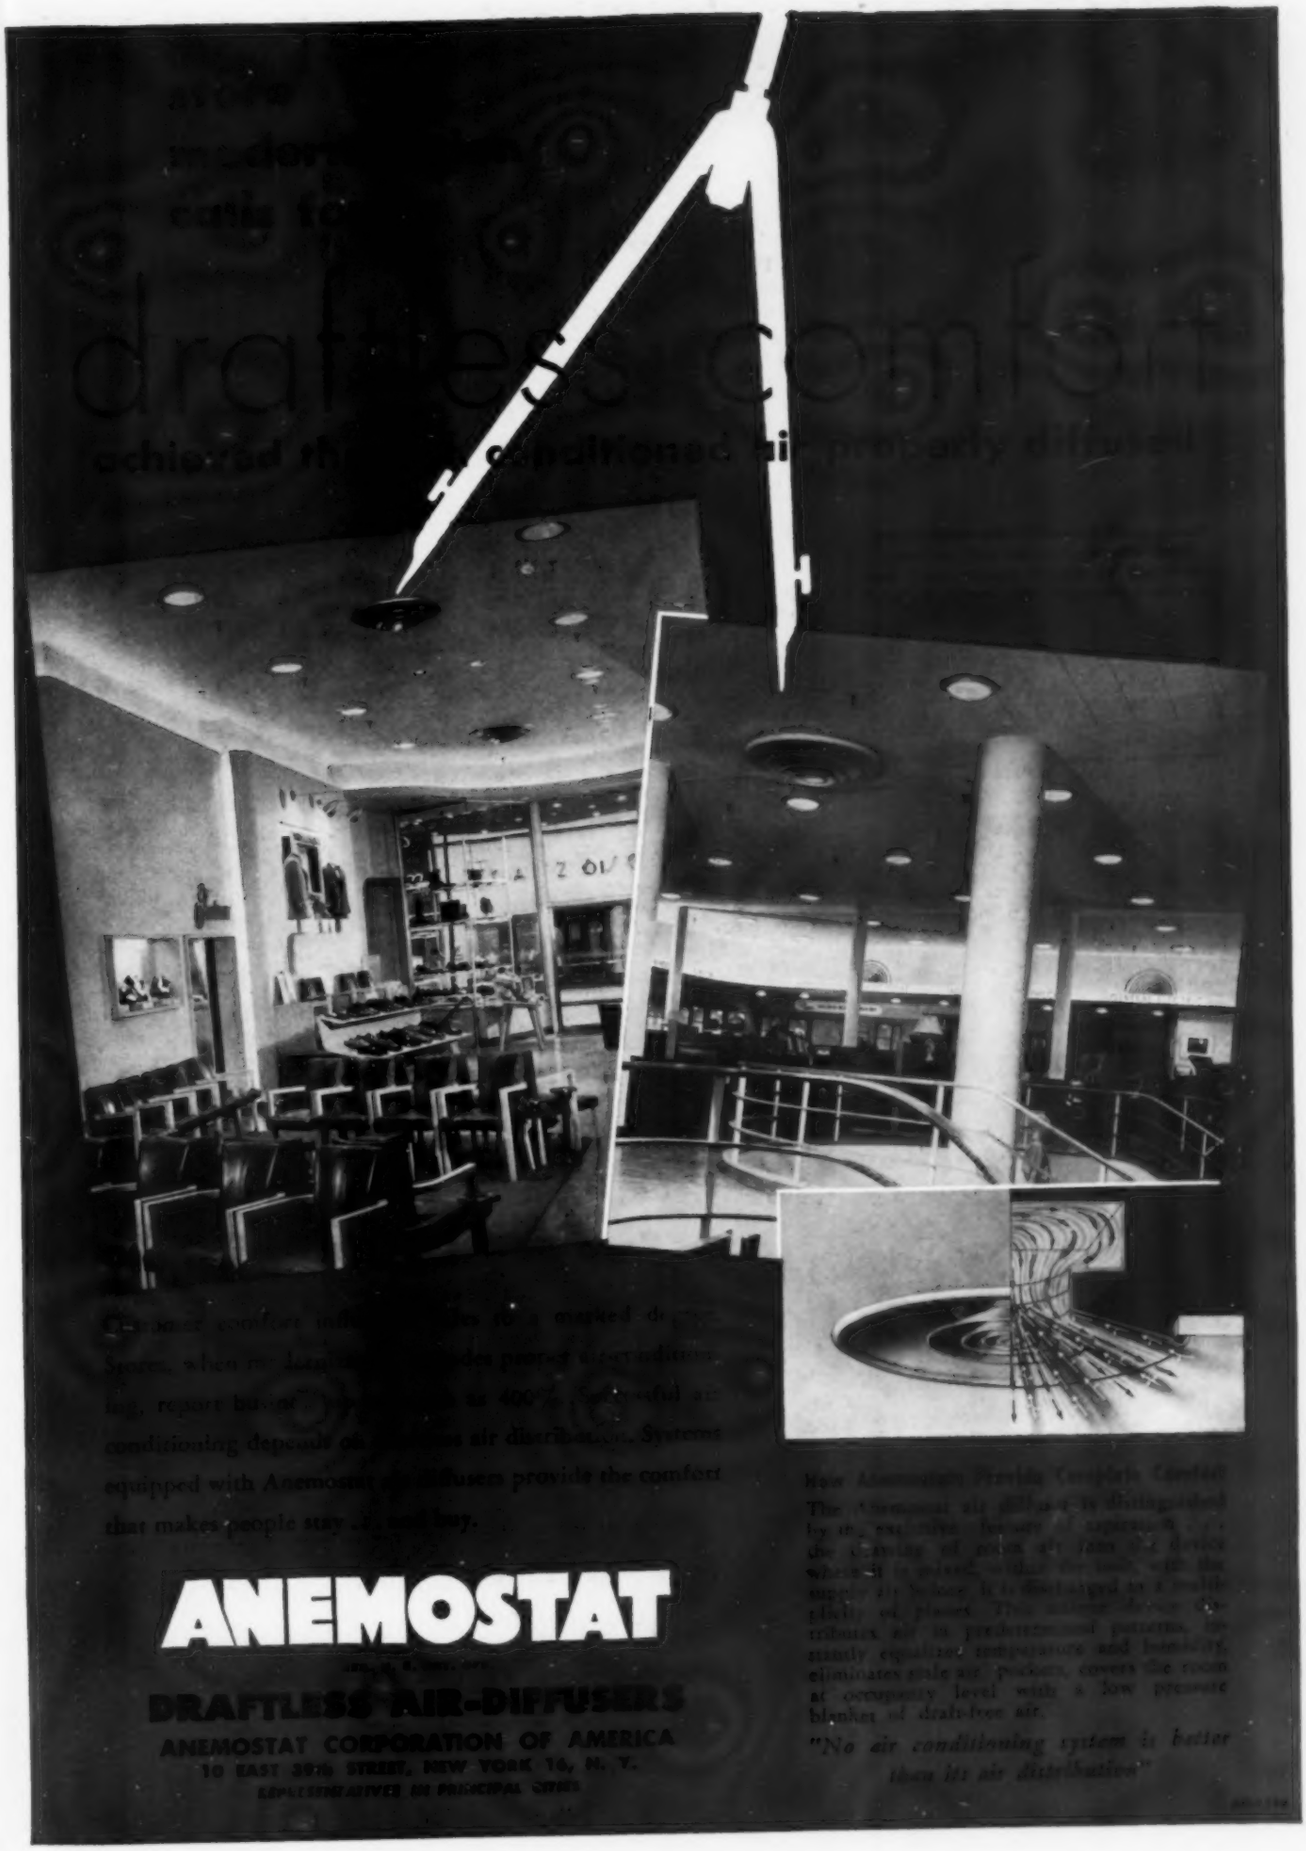
ANEMOSTAT
DRAFTLESS AIR-DIFFUSERS
ANEMOSTAT CORPORATION OF AMERICA
10 EAST 39TH STREET, NEW YORK 16, N. Y.

PRESCOLITE
Recessed
LIGHTING FIXTURES
42 DISTINCTIVE STYLES LISTED AT $5.50 to $19.50
Prescolite Fixtures—residential and commercial—are designed to conform to the smart simplicity of good modern decoration. Three rich finishes...*Chrome, Satin Brass, Satin Aluminum* ..... will blend with any decorative scheme.

- COMPARE ADVANTAGES OF RECESSED LIGHTING
- COMPARE *PRESCOLITE* PRICE • QUALITY • STYLE
- INSIST ON *PRESCOLITE* FOR MODERN LIGHT

EASE OF INSTALLATION



DISTINCTIVE STYLING



QUALITY LENSES AND GLASSWARE

WRITE FOR BULLETIN PA 2

- SOLD ONLY THROUGH RECOGNIZED ELECTRICAL JOBBERS
- ALL CATALOG UNITS AVAILABLE FOR IMMEDIATE DELIVERY
- UNION MADE—UNDERWRITERS' LABORATORIES, INC. Approved

A PRODUCT OF
PRESSTEEL COMPANY
800 BANCROFT WAY
BERKELEY 2, CALIFORNIA

Reviews

(Continued from page 114)

tems, radiant cooling, design theory, etc.

The author's experience in the field has been wide and he has a gift for making it all very simple, to be understood by any interested layman (or architect). The examples of installations in ordinary frame houses, including remodelings, are especially interesting. The only sort of installation he seems to have missed is the use of warm air as the heat source.

Most of the illustrations are well-chosen selections from the various suppliers of equipment, with due regard for the virtues of each. Only in the appendices is there any confusion. It is difficult to see the need, in a book of this quality, for padding out several pages with illustrations of fittings and valves. For instance, a most useful appendix "14—Design Procedure" is almost lost behind appendix "13—Names of Parts," consisting of a dozen or so handsome oversize line cuts of various globe valves.

J. R.

ARCHITECTS' YEAR BOOK: 2.

Edited by Jane B. Drew. Paul Elek Publishers Ltd., 38 Hatton Garden, London E.C.1, England, 1947. 340 pp., illus. 35s. net

The 27 articles of the British publication, "Architects' Year Book: 2" present in a stimulating and progressive manner worthy problems faced by architects today. Written from the British architects' point-of-view, this current survey has commendable international breadth and diversity, dealing with subjects such as painting and sculpture, town planning, architectural education, British competitions, and new materials and methods, as well as some recent architecture of various countries. Generally two or more articles are used to develop different aspects of each subject.

The town planning essays include studies of Finnish, British, and African towns developed with their own particular and rather unusual problems. The Finnish study deals adequately with the reconstruction of a town of 14,000 which was completely devastated by the war. A further heartening note is that town planning is being effected in Uganda and the Gold Coast—if not in New York City.

In the presentation of recent competitions, the imaginative but unpremiated scheme by the Entwistle group for the Crystal Palace competition is of great interest. In addition to its out-

(Continued on page 118)

sharp as tacks!
Ben. Franklin
"PRE-TESTED"
Drawing Pencils—sharpen finer, to longer lasting points. The minutely refined particles of graphite are firmly supported in microscopic cells of clay, and the lead sticks to the wood closer than a brother. That means clean, sharp lines, freedom from "dust" and frequent repointing.

To make doubly sure of quality, Ben. Franklins are "PRE-TESTED" for the strength, opacity and uniformity you need for clean drawings, and perfect prints.

Test a Ben. Franklin Free! Just write us, naming this magazine and the grade you wish.

Made in 17 Degrees 6B to 9H



*Reg. U. S. Pat. Off.



Blaisdell "PRE-TESTED"
Ben. Franklin
DRAWING PENCIL

Blaisdell PENCIL CO., ESTABLISHED 1893 • PHILA. 41, PA.

60th Anniversary

KOH-I-NOOR 1888 DRAWING PENCILS — 60 YEARS OF STAR PERFORMANCE 1948

FIRST

DRAWING PENCIL MADE
IN 17 DEGREES
IN PERFORMANCE
IN QUALITY

KOH-I-NOOR Drawing Pencils are precision instruments of the finest quality, professionally designed and manufactured by the most modern type of machinery. Expert supervision of every step, meets the exacting requirements of all architects, draftsmen, engineers and artists.

Specifications . . . 17 Degrees ✓ Uniform Accurate Grading ✓ Long Wearing ✓ Unsurpassed Breaking Strength ✓ Smooth ✓ Clear, Sharp Lines ✓ Black ✓ Opaque (Perfect Reproduction) ✓ Long Seasoned Cedar ✓ Strong Wood-Lead Adherence ✓ Lustrous Finish ✓

The Time-Tested #1500... 10¢

NEW!

THE
SUPER-DE-LUXE
KOH-I-NOOR #1500-I
DRAWING PENCIL
15¢

Degree Marking in Brown Panel
Rounded Dipped End
Imported Leads—17 Degrees
Printed Cellophane Wrap
Packed in Metal Boxes

Again Available... #1600

KOH-I-NOOR POLYCOLOR PENCILS

WITH IMPORTED LEADS
IN 65 COLORS

KOH-I-NOOR PENCIL COMPANY, INC.
BLOOMSBURY, NEW JERSEY

KENILWORTH HOTEL, Miami Beach, Fla.
Roy F. France & Son, *Architects*

COOLER ROOMS
with GATE CITY
AWNING WINDOWS

GATE City Awning Windows not only afford twice the ventilating area of ordinary sash, but they also invite fresh air in . . . promote circulation . . assure cooler rooms.

The multiple panes, top-hinged and operated by a no-stick worm-and-gear crank, add charm to any exterior Their "awning" feature permits ventilation in rainy weather . . . puts storm sash and screens *indoors*, thus promoting safety and eliminating rain-streaks on exterior walls. Cleaning also is done from the floor.

Used from coast to coast in homes, apartments, hotels, Government buildings and commercial structures. Furnished completely pre-fabricated with sash, hardware and glazing installed (including screens) Available from our factory or through local millwork and building material houses.

Considering their many *extra* advantages, Gate City Awning Windows cost little more—if any—than conventional sash. Any building you design can afford them. See our catalog in Sweet's.

MAIL COUPON FOR FULL INFORMATION — TODAY!

Gate City Sash & Door Co. P
Fort Lauderdale, Fla.

Please send complete information, full size details and scale drawings of Gate City Awning Windows.

Name.....

Address.....

City.....State.....

Export Sales Representative, Frazar & Company, 50 Church Street, New York 7, N. Y., U. S. A. Cable address: Frazar, N. Y. Agents in principal cities throughout the world.

Reviews

(Continued from page 116)

standing design, it seems to reflect but not surpass Paxton's original Crystal Palace. The reactionary winning design is apparently quite unfortunate.

Articles on education present reviews of English and American schools with several illustrations of student work. It is apparent that the same few pioneers in modern architecture still exert a strong influence in some schools in both England and the United States.

Other knowledgeable articles are in the technical and materials field. British appreciation of American wood truss design achievement is noted as well as their interest in thin concrete shell construction on the Continent. Authors of the various articles include Alvar Aalto, Le Corbusier, Maxwell Fry, Russell-Hitchcock, Ernst May, and Alfred Roth. Many good photographs and drawings are included.

While the essays are related as a whole to the work of the architect, their brevity seems to effect a slightly disjointed makeup. Nevertheless, I wish to recommend this volume for its interesting scope and energetic spirit working toward an integration of the parts that make up architecture.

OLINDO GROSSI

A HOUSING PROGRAM

For Now and Later. *Joint Committee of National Association of Housing Officials and National Public Housing Conference, Catherine Bauer, chairman. N.P.H.C., 1015 15th St. N.W., Washington 5, D. C. 60 pp. 25¢*

In an inclusive statement of the principles by which housing proponents are guided in their somewhat related programs, the Joint Committee has sought to evaluate activities in the field to date and also to strike an optimistic note for the outcome of concerted effort. This is a valuable handbook for those who wish to attack the housing shortage efficiently and in tune with present programs.

C. M.

CONURBATION

A Survey of Birmingham and the Black Country. *West Midland Group on Postwar Reconstruction and Planning. The Architectural Press, Ltd., 9-13 Queen Anne's Gate, London, S.W. 1, England. 1948. 288 pp., illus. including survey maps and analyses. 30 s. net*

The title of this comprehensive study of a sprawling semiurban area that has become symbolic of the Birthplace of the Machine Age is taken from the writings of Patrick Geddes, who first used the word to signify those great

(Continued on page 120)

PUT YOUR
FLOORS
IN HIS HANDS

BECAUSE . . .

Hillyard's Floor Seals, Finishes and Treatments properly protect and prolong the life of all types of floors. Floors stay cleaner, look better and last longer. Many leading flooring manufacturers and contractors approve Hillyard Products because they have given and are giving entire satisfaction in uniformity, dependability and economy. Write for literature on Hillyard products for every type surface.

HILLYARD SPECIFICATION CARDS

See Hillyard Specifications in Sweets 1948 Catalog. Sec. 13 Pages 13G-3

Send for Specification Cards. FREE for the asking.

HILLYARD
SALES CO's
DISTRIBUTORS
HILLYARD CHEMICAL CO. ST. JOSEPH, MO.

470 Alabama St., San Francisco, Calif.
1947 Broadway, New York, N. Y.

Safety in Walking - An Important Feature In a Shoe Store of Distinction

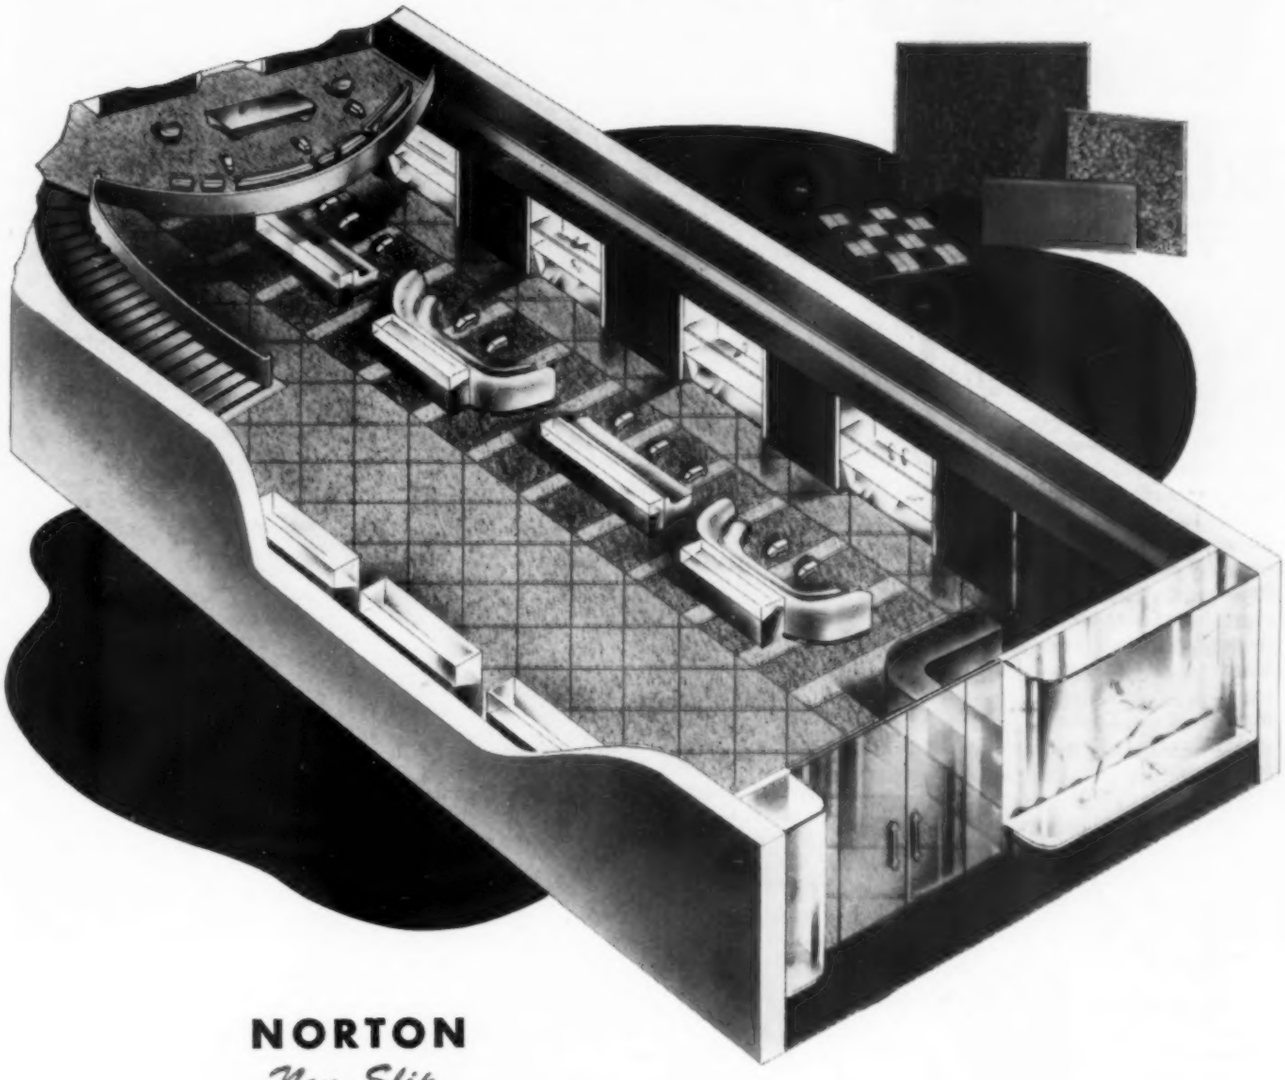

NORTON
Non-Slip
ALUNDUM FLOORS

Safety in walking is an important feature in any building where it is desirable to have a wear-resistant surface that is permanently non-slip even when wet. Non-slip flooring is a "natural" for a shoe store. The shoe store illustrated above has been designed to have ALUNDUM aggregate mixed with marble to make the terrazzo flooring in the entry way, on the main floor and on the stairs and mezzanine safe from slipping hazards. Combine beauty with safety and add years of wear-resistant service by using Norton non-slip ALUNDUM floor products: aggregate, stair tile, ceramic mosaic tile. For free color samples write to:

NORTON COMPANY **WORCESTER 6, MASS.**

ALUNDUM — Registered trade-mark for Norton Company's aluminum oxide abrasive.

NORTON *non slip* **ALUNDUM FLOORS**

See our catalog in Sweet's.



PERFECT
BLUEPRINTS
Direct
FROM PENCIL TRACINGS!

The lead in Mars Lumograph Pencils with the *special light resisting element*—an exclusive Staedtler feature—renders lines of "Resistant Opaqueness" thereby eliminating the necessity of "inking in". Blue prints are made right from your pencil tracings. A trial will convince you of the saving in time, labor and money Mars Lumograph Pencils will effect for you.

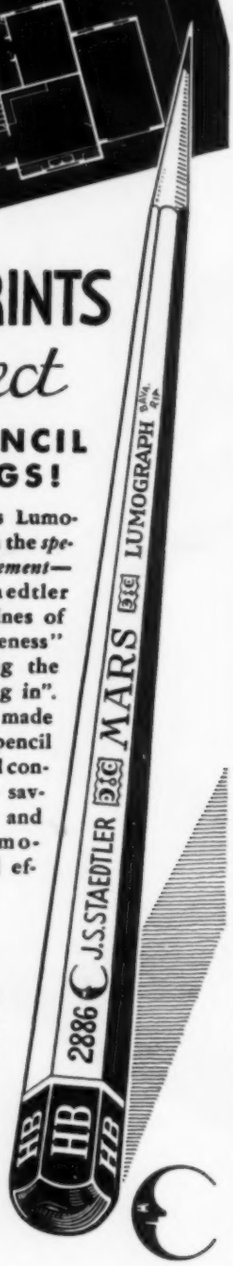

15¢
EACH

THERE IS NO SUBSTITUTE FOR A

MARS
LUMOGRAPH PENCIL

J. S. STAEDTLER, Inc.
53-55 WORTH ST., NEW YORK

Reviews

(Continued from page 118)

agglomerations of towns, surrounded and connected by strings and patches of building development, which have now become the physical environment of nearly half the population of England. An attempt is made to learn how to deal with the age-grimy problems of this vast established Coketown—seeking a solution for this area and also for younger Coketowns now rapidly approaching the same unhappy state.

C. M.

READER'S GUIDE

Town and Country Planning. *F. J. Osborn. For the National Book League by Cambridge University Press, Bentley House, London, England. 1947. 11 pp. 1 s*

In the preface to this selected list of books and pamphlets on planning, the experienced author comments: ". . . this book is particularly valuable to a reader who wishes to understand the background of the whole subject. The scope is so vast that no one need expect fully to comprehend it. But just for that reason anyone may contribute something to it. Planning is a continuous process; the last word will never be said."

C. M.

PLANES IN PLANNING

Aerial Photography in Urban Planning and Research. *Melville C. Branch, Jr. Harvard City Planning Studies, Vol. XIV. Harvard University Press, Cambridge 38, Mass. 1948. $3.00*

This excellently presented explanation of the nature and use of aerial photographs should be of great value to anyone having to use air views. The book tells what the different kinds of photos are, their relative value and degrees of accuracy for mapping, study, or special uses; what to specify in ordering views, allowable tolerances; describes stereo apparatus and interpretation. It is based on careful technical research, but is written simply and clearly, with helpful tables and illustrations. A welcome addition to the technical library of planners and architects.

HENRY S. CHURCHILL

ERROR IN CREDIT

The store illustrated in the A. C. Horn Co. advertisement last month on page 107 was incorrectly identified as Blum's Vogue in Chicago. The photograph was of M. L. Rothschild & Co. store in Evanston, Ill., and the colored sidewalk shown was installed by Melvin White, Inc., concrete contractors, of Chicago.

When Manpower *Waits . . .*

Losses pile up every time manpower is forced to lose productive minutes waiting for *doors* to be opened . . . standing by while traffic passes through . . . taking time to close them. You can easily stop these hidden profit leaks.

Manpower doesn't wait
when you specify Kinnear Motor Operated Rolling Doors.

Push-button switches provide instant, complete, fingertip control of door action at all times, *from any number of convenient points.* A split-second of *manpower* opens or closes the doors; the Kinnear Motor Operator does the rest, automatically.

You also provide *extra space* with Kinnear Rolling Doors. They coil out of the way, safe from damage by wind or vehicle, into a small area overhead. No wall, floor or ceiling space, is used as they open or close. All-steel construction assures extra, low-maintenance service, added protection against fire, storm, theft. Any size, for old or new buildings. Write for details.

The KINNEAR Manufacturing Co.
Factories: 1900-20 Fields Ave., Columbus 16, O.
1742 Yosemite Ave., San Francisco 24, Calif.
Offices and Agents in all Principal Cities

Saving Ways in Doorways
KINNEAR
ROLLING DOORS

The **SEVERN** Oil Boiler, with its trim lines and colorful jacket, blends perfectly with the decorations of this distinctive basement workshop. The Severn's tight construction keeps fuel odors from escaping into the room and adds to the shipshape cleanliness of the entire house. In the downstairs powder room are two popular American-Standard Plumbing Fixtures — the quiet **COMPACT** Water Closet and the shelf-back **COMRADE** Lavatory. These fixtures come in gleaming white and a choice of colors.

FIRST in heating and plumbing

with architects... with realtors... with home-owners!

AMERICAN-STANDARD Products are big favorites with people who recommend, specify or buy heating equipment and plumbing fixtures.

Their smart styling pleases those who look at them from the point-of-view of design; their sound construction details meet the exacting requirements of engineers; and their flawless performance, operating economy and long life appeal to home-owners.

Yes, you're sure of public acceptance when you choose American-Standard... for more American homes have heating and plumbing by American-Standard than by any other single company For details of the complete line, contact your Heating and Plumbing Contractor. **American Radiator & Standard Sanitary Corporation,** P. O. Box 1226, Pittsburgh 30, Pa.

For a hillside house, what could be nicer than a terrace-level utility room that doubles as a recreation room for all the family? A folding panel wall reveals the efficient, automatic gas fired **WYANDOTTE** Winter Air Conditioner, ideal for installation where space is at a premium. The **ALDEN** Laundry Tray, with its two deep compartments finished in smooth, easy-to-clean enamel, lightens washday tasks.

AMERICAN-Standard

First in Heating and Plumbing

Serving home and industry

AMERICAN-STANDARD • AMERICAN BLOWER • CHURCH SEATS • DETROIT LUBRICATOR • KEWANEE BOILER • ROSS HEATER • TONAWANDA IRON

COMPETITIONS

Two state-wide COMPETITIONS FOR DESIGNS FOR SALE AND RENTAL HOUSING FOR WAGE EARNERS, particularly families earning between $46 and $58 per week, have been announced by New York State Housing Commissioner Herman T. Stichman. The competitions are an outgrowth of the Institute of Housing and Planning Studies, held in New York City in June, and a part of a state program to bring about construction of good housing to sell for about $7,500, and to rent for from $50 to $75 per month.

Prizes total $3,000 for the two competitions; a first prize of $1,000, a second of $500, and ten honorable mentions will be awarded for each competition. One competition specifies a design for a single-family home, the other for a multifamily housing development. The competitions have been approved by the American Institute of Architects' Committee on Competitions, and William Lescaze is the professional advisor.

The competitions, which are open to all architects licensed to practice in New York State, except employees of the Division of Housing, close on November 15, 1948. Invitations and programs for the competition are being sent to all registered architects in the state. A jury of architects appointed by the Division of Housing, the Competitions Committee of the A. I. A., and the New York State Association of Architects, will judge the entries.

Details of two other competitions, which will be open to students of New York State architectural schools and to architectural draftsmen residing in the state, will be announced later.

EXHIBITION

PHOTOGRAPHS AND PLANS of the work of six Pacific Coast architectural firms will be exhibited in Australia during September and October. Architects who have been invited to display their work are *Pietro Belluschi*, Portland; *Mario Corbett*, San Francisco; *Gardner A. Dailey*, San Francisco; *Harwell Hamilton Harris*, Los Angeles; *Kump & Falk*, San Francisco; and *Wurster, Bernardi & Emmons*, San Francisco.

Presented jointly by the Australian-American Association and the Royal Victorian Institute of Architects, the exhibit will open at the Melbourne Town Hall September 15. A week later the exhibit will be shown in Sydney, and then may travel to Adelaide and Brisbane.

Similarity of climatic and topographical conditions along the Pacific Coast and in Australia and American-Australian friendship were among considerations which led to the invitation to exhibit. The idea for the exhibition followed last year's visit to the United States by John Buchan, member of the firm of Buchan, Laird & Buchan, and prominent architect in the state of Victoria.

Representing the American group for the opening ceremonies and other events connected with the exhibition, will be Ernest J. Kump, architect and school planning consultant and winner of 1946 and 1947 PROGRESSIVE ARCHITECTURE Awards. While in Australia Kump will address architectural students at the University of Melbourne and the Architectural Institute, and will inspect state housing and development projects, and then will travel to New Zealand.

A nation-wide tour of the United States is scheduled for the exhibition upon its return from Australia.

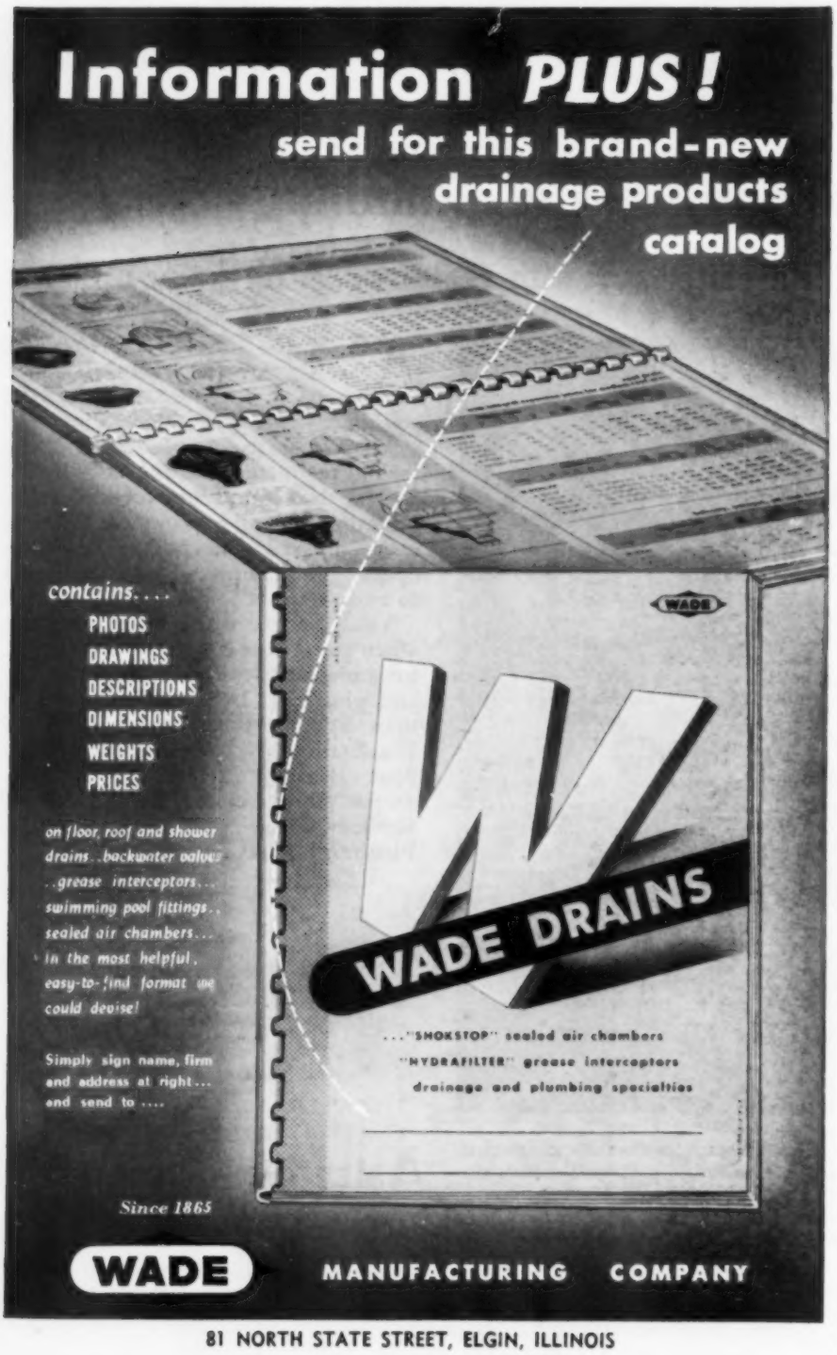
Information PLUS!
send for this brand-new drainage products catalog
contains....
PHOTOS
DRAWINGS
DESCRIPTIONS
DIMENSIONS
WEIGHTS
PRICES
on floor, roof and shower drains..backwater valves ..grease interceptors... swimming pool fittings.. sealed air chambers... in the most helpful, easy-to-find format we could devise!
Simply sign name, firm and address at right... and send to ....
WADE
WADE DRAINS
..."SHOKSTOP" sealed air chambers
"HYDRAFILTER" grease interceptors
drainage and plumbing specialties
Since 1865
WADE MANUFACTURING COMPANY
81 NORTH STATE STREET, ELGIN, ILLINOIS

801 AIDS TO EFFICIENCY

...another important job for Fenestra steel windows

Sloan-Kettering Institute
MEMORIAL CANCER CENTER • NEW YORK, N. Y.
Architect:
Skidmore, Owings & Merrill, New York City
Contractor:
Turner Construction Co., New York City

Specification Problem—*To find economical windows that would afford extra daylight for exacting research work, controlled fresh-air ventilation for working comfort.*

Specification Solution—*Selection of 787 Fencraft Projected Steel Windows, 2 Fencraft Casement Windows, 12 Fencraft Combination Windows—801 windows total.*

Add one more outstanding building where *Standard* Fencraft Windows were selected for efficient fenestration .... with savings clear across the board. First, savings result from the economies of mass production; second, from simplified installation because window dimensions are co-ordinated with those of other wall materials. And savings in the future will come from easy washing, easy screening and durability assured by famous Fenestra quality.

The Fenestra* family of Fencraft Windows . . . Projected, Casement and Combination . . . permit design freedom plus economy. For information on the many types and sizes available, see Sweet's Architectural File for 1948 (Section 16a-14). Or mail the coupon.

*®

Fenestra



FENCRAFT INTERMEDIATE STEEL WINDOWS

Detroit Steel Products Company,
Dept. PA-9,
2253 East Grand Blvd.,
Detroit 11, Michigan

Please send me data on types and sizes of the new Fencraft family of Fenestra Windows.

Name_____

Company_____

Address_____

Jobs and Men

SITUATIONS OPEN

WANTED—experienced architect or architectural draftsman, college graduate preferred. Permanent position. Give experience, references and salary desired. Box 165, PROGRESSIVE ARCHITECTURE.

WANTED—architectural designer for permanent position in small established office in Houston, Tex., doing commercial, residential and city planning. Please write full details as to education, age, experience, salary expected and date available. Box 166, PROGRESSIVE ARCHITECTURE.

ARCHITECTURAL DRAFTSMEN—capable of developing working drawings in small office doing general practice. Good opportunity. Give full particulars, age, education, experience and salary. Clarence Warren Doll, A.I.A., Donnell Bldg., Mattoon, Ill.

ARCHITECTURAL DRAFTSMAN—wanted by University of Illinois to prepare working drawings, details and shop drawings for new building construction, alterations and maintenance work. Position permanent. Vacation, sick leave, retirement and other benefits. Write Personnel Office, 809 South Wright St., Champaign, Ill.

WANTED—Experienced heating engineer for permanent position who can make heating layouts and write specifications for all types of buildings. Send outline of education, training and experience with samples of work and salary requested. Marr and Holman, Architects, 702 Stahlman Building, Nashville, Tenn.

WANTED—Experienced architectural designer for permanent position. Please submit outline of education, training and experience along with samples of work and annual salary requested. Marr and Holman, Architects, 702 Stahlman Building, Nashville, Tenn.

ADDITIONAL INSTRUCTORS—in architectural design, structural design, and related courses are needed at the schools of architecture for the fall semester. Those interested in a career in the teaching profession should apply to Professor Paul Weigel, chairman of the committee on employment for the Association of Collegiate Schools of Architecture, Kansas State College, Manhattan, Kans.

WANTED—experienced architectural and mechanical draftsmen capable of designing and preparing working drawings for schools, hospitals, churches, and commercial buildings. Permanent positions for right men. Give information as to education, age, experience, and salary expected. Ritterbush Brothers, Architects, 209 N. Seventh Street, Bismarck, North Dakota.

WANTED—by established architectural firm in Southwest, experienced architectural engineer capable of handling steel and concrete design together with ability to carry work from preliminary to final working drawings and specifications; one desirous of interest in firm. Box 170, PROGRESSIVE ARCHITECTURE.

Advertising Rates

Standard charge for each unit is Five Dollars, with a maximum of 50 words. In counting words, your complete address (any address) counts as five words, a box number as three words. Two units may be purchased for ten dollars, with a maximum of 100 words. Check or money order should accompany advertisement and be mailed to Jobs and Men, c/o Progressive Architecture, 330 W. 42nd St., New York 18, N. Y. Insertions will be accepted not later than the 1st of the month preceding publication.

ARCHITECTURAL DESIGNER—for the best younger designer in the country, this progressive and substantial Chicago firm offers an exciting opportunity. The right man is versatile, has vision and practical daring, likes people and can beat the obstacles. Such a man, if he has leadership qualities, will be chief designer in six months. If working under pressure appeals to you plus a substantial salary and share in the profits, write in confidence for an application blank as our people all know of this opening. Box 167, PROGRESSIVE ARCHITECTURE.

MECHANICAL ENGINEER — young creative man with sound ideas and a background of experience in responsible charge of mechanical engineering work can make lifetime connection with successful and progressive Chicago architectural firm. We want a vigorous and original thinker who understands and uses modern techniques to develop fresh solutions to mechanical problems. If you like plenty of work, good surroundings and congenial associates who are leaders in their field, write for application blank in confidence. Excellent salary. Our men know of this opening. Box 168, PROGRESSIVE ARCHITECTURE.

WANTED—experienced chief draftsman. Antonin Raymond and L. L. Rado, 101 Park Avenue, New York, N. Y.

INDIA'S 400,000,000 — need Missionary Builders. Challenging opportunity in new architectural-building firm, for young partners with $10,000: architectural engineer experienced construction supervision; landscape architect-city planner; interior designer experienced furniture design and construction. Excellent husband-wife team possibilities. Specifications: courage, ability, enthusiasm, cooperative spirit, sense of humor. Stuart and Rosemary Johnston, 4750 Sheridan Road, Chicago, Ill.

INDUSTRIAL ARCHITECT — permanent position and location as chief, architectural department, large manufacturing company. Prefer national registration; must be registered or able to secure registration in North Carolina, Virginia, and Kentucky. Basic planning and analysis of production space and areas; would prefer experience in design of manufacturing buildings with particular ability for design in steel and reinforced concrete, as well as ability in field of building maintenance, repair and alteration. Box 171, PROGRESSIVE ARCHITECTURE.

WANTED — architectural draftsmen, experienced in industrial, commercial and institutional work by established firm in the most rapidly expanding section of the Southwest. Submit complete record of experience and salary expected. Thomas, Jameson & Merrill, 820 North Harwood, Dallas, Tex.

SITUATIONS WANTED

ARCHITECTURAL DRAFTSMAN — designer, graduate of Georgia Tech. Sixteen months' experience in residential, county school and health center design and drafting; limestone and granite detailing; knowledge of structural concrete design and drafting. Would like position with progressive architectural firm in Houston or Dallas, Tex. Box 1975, Georgia Tech., Atlanta, Ga.

ARCHITECT—practicing England, consultant on large-scale town planning, civic centers, cultural, sports, retail centers, tiring postwar paper work, seeks realization in U.S.A. utilizing plastic and organizational qualities. Work internationally published and exhibited. Extensive experience furniture, interior and exhibition design. Background includes lecturing, writing. Possess immigration permit. Box 169, PROGRESSIVE ARCHITECTURE.

MISCELLANEOUS

COMPETENT ARCHITECTURAL RENDERING —service offered according to the architecture's requirements for all types and styles of structures in any medium. Write to Rendu, PSNA Bldg., 400 North Third Street, Room 200, Harrisburg, Pa.

HORACIO GONZALEZ, ARCHITECT AND GENERAL CONTRACTOR—788 Avenue 39, Bogota, Colombia, would like to secure technical literature and other printed matter for a complete A.I.A. file. He would also like to act as representative in Colombia for American manufacturers of building materials.

ARCHITECT-ARTIST AND DELINEATOR—of long experience, offers services for free-lance architectural renderings and perspectives, bird's-eye views of architectural treatment of engineering structures such as highways and bridges. Theodore A. De Postels, A.I.A., 644 Riverside Drive, New York 31, N. Y. AUdubon 3-1677.

PUBLIC RELATIONS

Complete effective service for local and/or national coverage.

Specialists in public relations for architectural organizations.

Moderate fee arrangement. Write for details—No obligation.

BASCOME co

501 MADISON AVENUE NEW YORK 22

Directory of Products, Materials & Equipment

Product Report .... September, 1948
LUMBER AND LUMBER PRODUCTS

There seems to be an indication that the dearth of lumber, and in some cases, lumber products, is gradually becoming a thing of the past. According to the latest report by the National Lumber Manufacturers Association, production of lumber has dropped slightly from last year, but stocks in lumber yards have increased. To get statistical for a moment—production is running a fraction of a percent lower than last year, but stocks in lumber yards are up more than 11 percent. This is still no cause for shouting, however, because stocks are about 19 percent lower than on December 30, 1940!

As for lumber products, production is high—but so is use. During April for instance, production of hardwood flooring was 43 percent ahead of the same month in 1947. The demand remained heavy, resulting in little or no increase in the stock of hardwood flooring available from local lumber yards.

The production of softwood plywood (⅜ inch equivalent) continues its record-breaking production schedule, with a record of 185.2 million square feet set in March. Seasonal dips are beginning to have their effect, with small drops in production already indicated. Stocks held by plywood producers are just about the highest on record, running about 12-15 percent above 1947.

Red cedar shingles and shakes are suffering from malnutrition, it would seem. No other reasons can be given for the drop in production that finds 1948 running a good 12 to 15 percent behind 1947. There is a seasonal trend during

(Continued on page 150)

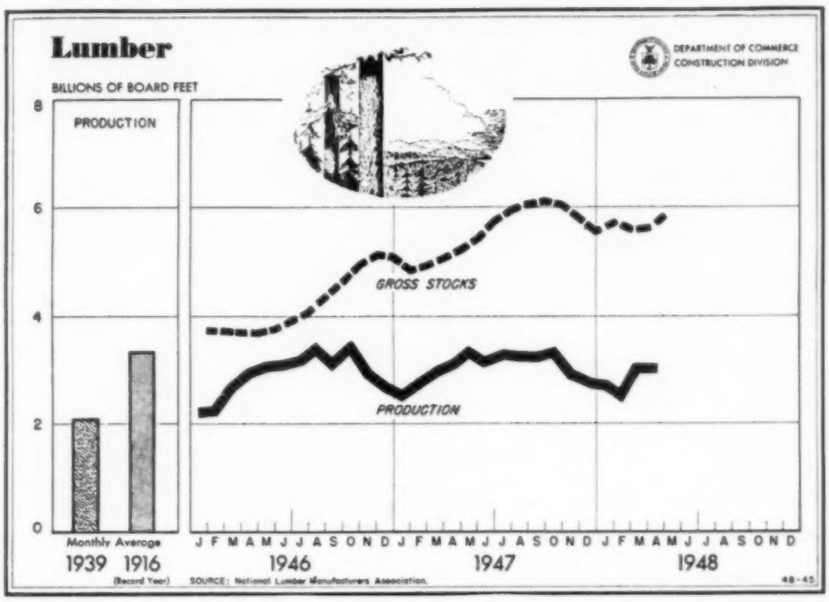
Lumber
DEPARTMENT OF COMMERCE
CONSTRUCTION DIVISION
BILLIONS OF BOARD FEET
PRODUCTION
GROSS STOCKS
PRODUCTION
Monthly Average
1939 1916
(Record Year)
J F M A M J J A S O N D J F M A M J J A S O N D J F M A M J J A S O N D
1946
1947
1948
SOURCE: National Lumber Manufacturers Association.
48-45

ADVERTISING RATES — P/A DIRECTORY

The **P/A** Product Directory Section appears as a monthly feature. It constitutes (a) an industry report on major classifications of building products, materials & equipment, and (b) space for a series of standard advertising units arranged for position besides editorial material to afford maximum visibility. Standard units, size 2⅛" x 3". Cuts and copy should be sent to Progressive Architecture, Reinhold Publishing Corp., 330 W. 42nd St., N. Y. 18. Copy and layout service is available on request.

RATES

12 times, $50.00 per insertion
6 to 11 times, $75.00 per insertion
1 to 5 times, $90.00 per insertion

Special rate advantages may be obtained by using the directory in conjunction with display advertising.

CUMULATIVE COSTS

No. of Insertions	Total Cost	No. of Insertions	Total Cost
12	$600.00	6	$450.00
11	825.00	5	450.00
10	750.00	4	360.00
9	675.00	3	270.00
8	600.00	2	180.00
7	525.00	1	90.00

NOTE: Directory units may be used to earn lower rates on larger space.

wasco
COPPER FABRIC FLASHING



1. COPPER SHEETING
2. ASPHALT IMPREGNATED FABRIC

OTHER WASCO PRODUCTS
COP-R-TEX COPPERSEAL
WASCO REGLET WASCO SHOWER PAN
SEE SWEET'S 8 D-6 — WRITE FOR FOLDER
WASCO FLASHING COMPANY
86 Broadway Cambridge, Mass.

CONNOR
Forest Products Since 1872
"LAYTITE"
MAPLE and BIRCH FLOORING
The World's Finest
—Bar None
MFMA Specifications
Write for illustrated 75th Anniversary Booklet
CONNOR LUMBER AND LAND COMPANY
P.O. BOX 112-O, MARSHFIELD, WIS.
PHONE NO. 3

Naval Reserve Training Center, Sheboygan, Wis.

WHITCO Sash Hardware
Stocked by Builder's Hardware Dealers Everywhere
- REVERSIBLE ACTION permits two-side window cleaning from the inside of the room
- ECONOMICAL due to the simple mill detail required and lowest installation labor cost
- ADAPTABLE to all sizes and styles of casements, awning-type windows or transoms

See our catalog in Sweet's or write for full-size details from
VINCENT WHITNEY CO.
130 Tenth Street San Francisco, Calif.

Directory of Product Advertisers

Adam, Frank, Electric Co. 113
Air Devices, Inc. 29
Air Express Division of Railway Express Agency 110
Aluminum Co. of America 45
American Brass Co. 109
American Playground Device Co. 17
American Radiator & Standard Sanitary Corp. 121
American Roof Truss Co. 142
American Structural Products Co. 40
Anaconda Copper Mining Co. 109
Anemostat Corp. of America 115
Anthracite Institute 141

Barber-Colman Co. 132
Bennett-Ireland, Inc. 138
Bergen Cabinet Mfg. Co. 106
Blaisdell Pencil Co. 116
Brasco Mfg. Co. 143
Brownell Co., The 142
Bruce, E. L., Co. 13

Cabot, Samuel, Inc. 9
Cambridge Tile Mfg. Co., The ..... 3rd Cover
Carrier Corp. 22
Ceco Steel Products Corp. 98, 99
Celotex Corp., The 34
Certified Ballast Mfgrs. 105
Chase Brass & Copper Co. 25
Cheney Flashing Co. 146
Committee on Steel Pipe Research of American Iron & Steel Institute 28
Connor Lumber & Land Co.* 149
Copperweld Steel Co. 136
Crane Co. 44

Detroit Steel Products Co. 32, 123
Dunham, C. A., Co. 142
Duriron Co., Inc. 16

Eagle Pencil Co. 111
Elliott, B. K. Co. 144
Engineering Manufacturing Co. 148

Fedders-Quigan Corp. 138
Federal Enterprises, Inc. 2, 3
Federal Seaboard Terra Cotta Corp. 46
Federation Technical Institute 148
Flynn, Michael, Mfg. Co. 37
Formica Insulation Co. 33

Gate City Sash & Door Co. 118
General Electric Co., Air Conditioning Div. 38
General Electric Co., Construction Materials Div. 107
General Pencil Co. 35
Grand Rapids Hardware Co. 130
Graphic Indicator Co. 140

Hillyard Sales Co. 118

Inland Steel Products Co. ..... 2nd Cover
Insulite Division, Minnesota & Ontario Paper Co. 11
International Steel Co. 145
Ipik Plywood Co. 18

Jamestown Metal Corp. 144
Johns-Manville Corp. 133
Johnson, S. T., Co. 140
Josam Mfg. Co. 27

Kimberly-Clark Corp. 144
Kinnear Mfg. Co., The 120
Koh-I-Noor Pencil Co., Inc. 117

LCN Closers, Inc. 42
Libbey-Owens-Ford Glass Co. 94
Lone Star Cement Corp. 48

Marble Institute of America, Inc. 26
Master Builders Co. ..... Back Cover
McGraw-Hill Book Co. 144
Mengel Co., The 147
Metal Products Corp. 130
Minneapolis-Honeywell Regulator Co. 15

National Electric Products Corp. 23
National Gypsum Co. 36
National Terrazzo and Mosaic Association, Inc. 136
Northwestern Terra Cotta Corp. 146
Norton Co. 119
Norton Door Closer Co. 134

Ohio Chemical & Mfg. Co. 125
Otis Elevator Co. 139

Peck & Harvey 148
Pittsburgh Corning Corp. 47
Pittsburgh Plate Glass Co. 41, 43, 128, 129
Pittsburgh Steel Corp. 39
Portland Cement Assn. 131
Pressteel Corp. 116

Reinhold Publishing Corp. 140, 151
Republic Steel Corp., Steel and Tubes Division 100
Revere Copper & Brass, Inc. 91
Richards, J. Merrill 140
Robertson, H. H., Co. 31
Roddis Lumber & Veneer Co. 135
Rosenthal Co., The 148
Rotary Lift Co. 20
Ruberoid Co. 19

Schlage Lock Co. 10
Scott Paper Co. 24
Sedgwick Machine Works 12
Servel, Inc. 126, 127
Sisalkraft Co. 21
Soss Mfg. Co. 132
Staedtler, J. S., Inc. 120

Tile Council of America, The 101, 102, 103, 104
Tile-Tex Co. 6, 7
Timely Products Co. 142
Trane Co. 4, 5

United States Gypsum Co. 137
United States Plywood Corp. 108, 147
Universal Atlas Cement Co. 114

Wade Mfg. Co. 122
Wasco Flashing Co.* 149
Weldon Roberts Rubber Co. 146
Werner, R. D., Co. 146
Whitney, Vincent, Co.* 149
Wiley, R. & W., Inc. 112
Wilson Engineering Corp. 148
Worthington Pump and Machinery Corp. .. 96

Young Radiator Co. 134
Youngstown Sheet & Tube Co. 30

* *Directory Advertiser*

Advertising and Executive Offices
330 West Forty-Second Street, New York 18, N. Y.

JOHN G. BELCHER, *Publishing Director* — FRANK J. ARMEIT, *Production Manager* — ALLEN A. RAYMOND, JR., *Promotion Manager*

Advertising Representatives
DOUGLASS G. PILKINGTON, *District Manager*, 22 West Monroe St., Chicago 3, Ill.
D. B. WILKIN, *District Manager*, 1133 Leader Building, Cleveland 14, Ohio
EDWARD D. BOYER, JR., *District Manager*, 330 West 42nd St., New York 18, N. Y.
HAROLD D. MACK, JR., *District Manager*, 330 West 42nd St., New York 18, N. Y.
WILLIAM B. REMINGTON, *District Manager*, 330 West 42nd St., New York 18, N. Y.
DUNCAN A. SCOTT & CO., Mills Building, San Francisco, Calif.
448 South Hill St., Los Angeles 13, Calif.

(Continued from page 149)

the summer, but as yet the statistics are not conclusive enough to be quoted. However, the production rate began to climb during the early summer. Imports of red cedar shingles continue to run high.

The production of millwork items such as doors, exterior frames, etc., continues to run well ahead of 1947—in fact, well ahead of any year since 1942. Seasonal ups and downs account for monthly changes in production, but stocks on hand are averaging out at a steady figure—a figure that continues to be too low for the huge demand currently being felt.

If you're wondering why doors, frames, sash, etc., are not available whenever needed, it's not the fault of manufacturers. During 1947 door production was 3 million units ahead of 1946, and many million units higher than any year since 1941. Open sash has not kept pace with door production, but 1948 promises to approach 1941 production figures. Exterior frame production is up in the million-unit bracket, with 1947 production the largest since 1941, and 1948 production well ahead of 1947.

The over-all picture for lumber and lumber products probably looks the best since 1941. The bottleneck isn't production, but the enormous demand that was built up during the war years. Manufacturers are reluctant to increase production facilities to take care of the abnormal demand because such facilities would become idle when building activity returned to normal. It all boils down to the simple conclusion that the industry is bound to catch up with demand—but not for quite a while.

HOMES

SMALL . . MEDIUM . . LARGE

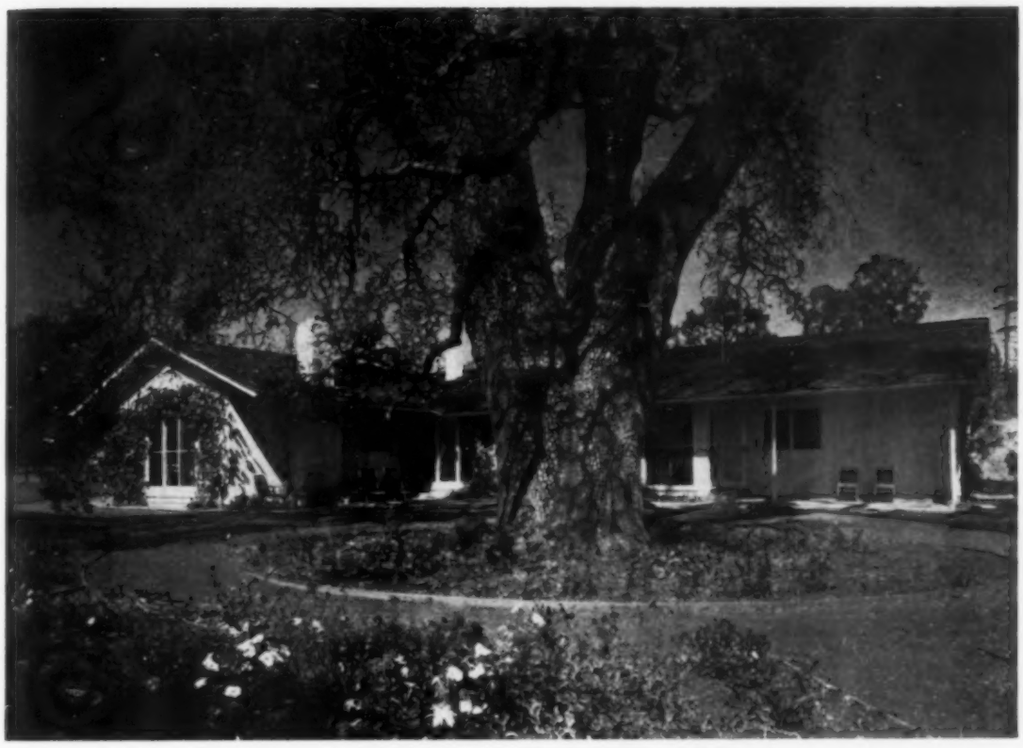

NEW ENGLAND
MIDWEST
NORTHWEST
SOUTHWEST
SOUTH
PACIFIC COAST
MIDDLE ATLANTIC

•

A NEW BOOK
BY REINHOLD

ARCHITECTS: WURSTER, BERNARDI & EMMONS
PHOTOGRAPHER: ROGER STURTEVANT

HOMES . SELECTED
BY THE EDITORS OF
PROGRESSIVE
ARCHITECTURE

CREIGHTON
LOPEZ
MAGRUDER
SANDERSON

The editors of PROGRESSIVE ARCHITECTURE got to thinking about the need for a book on houses for architects to show to their clients. They write and edit each month for a professional audience; perhaps, for once, they should do a job which would appeal to—and, if possible, influence—the great consuming, home-building public. Maybe, they thought, they should do a book.

Here's the book. Working through many a spring and summer evening and top of the morning, they've come up with a collection of HOMES selected for their livability, their friendliness, and intimacy, their invitation to informal attractive living. They've done this for only one reason—to give you a useful book that will help you interest your clients in good residential architecture; to promote design progress yet further; to show in page after page what all of us know anyway—that today's architecture can be charming and beautiful and livable.

The book is cloth-bound with a cover designed by Stamo Papadaki. There are 287 handsome architectural photographs and 116 plan drawings by Elmer Bennett. All regions are represented, and many, many architects. There is just enough text to explain—in easily understood terms—what the trends are in home design, and why these houses are good, in planning, use of materials, and in many details of design and construction.

Price $5.00

REINHOLD PUBLISHING CORPORATION
Dept. P.A.-9, 330 West 42nd St., New York 18, N. Y.

Enclosed find $ ..... for ..... copies of HOMES. (Add 2% sales tax to your remittance for orders delivered in New York City.)

Name .....

Address .....

City ..... State .....

P/A P.S.

THOSE WHO CAN'T WAIT TO GET THEIR COPIES OF P/A so that they can turn immediately to the last page for those words of wisdom and pure gossip that roll off the editor's typewriter after he finishes his real work each month will remember the touching appeal in the June issue from a draftsman who wanted to find congenial employment before he started "growing a pair of dormers." I am happy to report he now writes that "because of your help I will soon be working with one of the best outfits in Philadelphia." Good luck to both the man and the "outfit." Having acted as marriage broker, I shall keep my fingers crossed that there is no divorce.

●

A CHARMING LADY WHO HAS STRONG OPINIONS on current architectural trends was holding forth at a party recently about the large glass areas common to much contemporary residential work. "I can't see why people want a lot of glass in the living room," she said. "You have no privacy. I just wouldn't like it in my own house." Then she thought a moment, and added, "I can see how it might be pleasant in a bedroom, though . . ." A prominent designer turned to her sadly and said, "My dear, you don't need an architect —you want a psychiatrist."

●

A NEW ENGLAND CORRESPONDENT TELLS US OF ANOTHER LADY with another aberration. It seems that Mrs. Jones had been born and brought up in the Midwest, but had always had a hankering for New England which was largely induced by pictures she had seen of the sleepy, cool, quiet New England streets lined with white clapboard saltboxes. Finally her husband was transferred to a Connecticut town, and she got her wish. One of her first moves was to retain an architect to design her a New England Colonial house. He did a nice job, and the house was built. It sits there today, the only "colonial" house on a street which is otherwise consistently designed in a contemporary manner.

ARCHITECTS MAY NOT ALWAYS BE ALIVE to their social responsibilities, but when daily bread and butter is involved, they react quickly. The ad run in all of the national architectural magazines in July by the California State Personnel Board, recruiting technical help, including architects, has resulted in a number of responses quite different from what the Board expected. I have before me a letter from Mr. Martin Fuller of Los Angeles, California, who points out that any support for government-bureau-designed architecture is inconsistent with the argument that important design comes from the absorption of the architect in the life of his community, a point of view which P/A has been documenting in its ARCHITECT AND THE COMMUNITY studies. I also have a copy of a letter to the California Board (a copy also went to Governor Warren who I believe is running for some political office) from the Dallas, Texas, Chapter of the A.I.A., which says in part:

"The Dallas Chapter . . . resents your wholesale and glamorized effort to entice (architects and their employed assistants) from their gainful and worthwhile private practice of architecture into a government endeavor which would appear to be inconsistent with obtaining the excellent architecture your state is known for and certainly detrimental to the interests of your own highly capable architects."

●

AS TO THE QUESTIONS, raised in these letters I believe P/A has made itself clear on its editorial position many times. Government design *per se* is not bad. If it were, we would have to scorn TVA, among other work. However, there is darn little building construction which the government should design under an efficient operation of our system. Furthermore, there has been darn little good government-designed work in this country. The tendency of a government bureau seems to be to become stodgy, repetitious, unimaginative. "Standards" are usually repeated endlessly without re-examination and improvement.

On the other hand, there are a number of functions that a government architectural and engineering staff can accomplish without taking work away from private practitioners and without getting involved in design matters where they are not at the present time capable and do not seem to be able to be progressive. Planning a capital budget program for a state or a municipality is one. Programming a hospital, a health, a cultural, even an industrial program of growth is another. Developing minimum standards, collating available information, engaging in research which the private man cannot afford is still another. Much as some architects may object to it, checking to see that standards of decency and public health and safety are met is one more useful and indeed necessary function.

The obvious examples, often pointed to, of an intelligent and of an unfortunate use of the government architectural and engineering function are the U. S. Public Health Service, on the one hand, and the Veterans' Administration on the other. In the first case, there are few architects in the United States designing hospitals who have not profited from the objective design advice and basic research of that agency's technical staff. In the second case, the record of progress in V.A. hospital design under the program given out to private architects, contrasted with the completely unimaginative design done in the agency's own drafting room, constitutes a case history now being built in brick and stone and steel and concrete.

I certainly would not like to see a State Board actually design "public" buildings in California, when there are so many brilliant men engaged in private practice. And I agree with the Dallas architects that it would be a shame for good people to be lured from their offices to work for the State of California when they should rather look forward to professional activity which will help improve the physical surroundings in their own region.

●

THE OFFICES OF KUMP & FALK IN SAN FRANCISCO were justifiably proud of the fact that they won the P/A Award two years running, and the office staff turned out *en masse* for the presentation dinner in June. The photograph below, of the Kump & Falk employees, may be explained in one of two ways.



Perhaps the figure floating in the air is a bit of ectoplasm induced by the subconscious thoughts of a group of people released from day-to-day worries for an evening of relaxation. Or perhaps (and this is the story I got from Mr. Skelton, the photographer) it is a double exposure, with the P/A affair registered on the same plate that was used for a studio pose for totally different purposes. Why didn't I get around to the Skelton Studio while I was out there?

Thomas H. Creighton